





FULGOR MILANO



2

PROFESSIONAL

PROFESSIONAL COOKING HOODS FRIDGE CLEAN ACCESSORIES

DISTINTO

DISTINTO COOKING HOODS FRIDGE CLEAN ACCESSORIES

TECHNICAL

DWG DATA



pag pag	12 24
pag	64
pag	74
pag	82
pag	84

pag	102
pag	107
pag	156
pag	165
pag	170
pag	176

pag 182 pag 203



FULGOR MILANO

OF MILANO

Milano is renowned the world over as the center of style and design. At Fulgor Milano we are inspired by this great city and its rich history of combining form and function with architecture. It is from this city which Sofia is born.

Sofia embodies a styling that is all her own, with an attention to detail and design that is unsurpassed in the industry. As it is with the Cathedral of Milano, our Sofia range stands out in a crowd. Drawing inspiration from the modern





cosmopolitan city of today, Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable.



POM/ OF ROMA



Not unlike the incredible eternal city of Roma, our Sofia products are designed to stand the test of time. A product that embodies endurance and is built on a tradition of beauty, durability, and functionality. Roma has survived over two Millennia through evolution of design and innovation. Fulgor Milano's passion for innovation has resulted in premium products born from a culinary culture dating back to ancient




Roma but in synergy with today's lifestyle. Every one of our Sofia products has been developed to offer a lifetime of performance in an ergonomic and comfortable design that is both elegant and simple to use.



FULGOR MILANO

OF FIRENZE

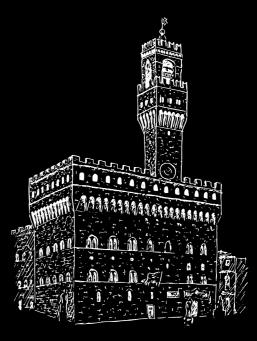

As the kitchen has once again become the center of the home over the past decade, Fulgor Milano understands our desire to incorporate appliances that meet the needs of both form and function. There are few places in the world that can boast a rich history of form, function, art and

design. Florence was the birth place of the renaissance, where Michelangelo and Leonard da Vinci sculpted and painted forms in perfect balance. It was during this renaissance that the art of cooking was born. Florance would become the birth place of gastronomy and was



the culinary center of the modern world at that time. Fulgor Milano has endeavored to incorporate all of these aspects into their cooking products. Drawing further inspiration from this great city and blending a perfect balance of quality, design and performance into every product.



FULGOR MILANO

LIKE VENEZIA



There is not a more unique city in the world than Venice. A city that by modern engineering standards should not exist. A city built on the sea, that has inspired generations of visitors for centuries.

The original gateway to the east, Venice is a city whose architecture incorporates design aspects from the middle east and Asia, adding to its unique appeal. No other place influences the styling of Sofia more than Venice.





Sofia's designer, having attended the school of Architecture at the University of Venice, drew his inspiration during this time in Venice. It is only fitting that this unique city influenced the unique design of our beautiful Sofia range.



PROFESSIONAL

DESIGN

POWER

GUSTO

UNIQUE

Sofia represents the beauty and sophistication that is Italy and the Meneghetti Family has paid tribute to all the unique cultural aspect of this storied country with Sofia and the complete

line of Fulgor Milano products. Inspired by all the great regions of Italy, Soifa was born in the heart of the Veneto region, culturally rich in art and tradition. Sofia embodies a contemporary



SCOPRI IL PROFILO ITALIANO DI SOFIA

design that is feminine and powerful, which inspires us to prepare dishes worthy of admiration. The Meneghetti Family has presented us with a symbol of the ultimate expression of Italian excellence.

PROFESSIONAL LINE





CLASSIC BEAUTY

Sofia is a solid, generously sized freestanding range with a clean and rigorous style. Designed, developed and engineered in Italy to exceed all expectations of quality, performance and style. Sofia will captivate the most discerning chef with nuanced features that are traditional yet innovative.





SOFIA PROFESSIONAL





SOFIA IS AN INDIVIDUAL

We designed a professional range with a style and presence unique to her name. Sofia integrates the use of stainless and brushed aluminum for a design that is elegant and distinctive.

TOTAL CONTROL AND DELICATE POWER

Every aspect of Sofia is beautiful and her gas cooking surface is no exception. Every burner allows you to temper the most delicate chocolate or sear a steak to perfection.

TOTAL ACCESS AT YOUR FINGER TIPS

Choose multiple baking functions, timed bake, meat probe, and a variety of other customizable settings and baking features.

PROFESSIONALLY CRAFTED

This multifunction range, combines all the features of a fully-equipped professional range with a stainless steel design which highlights the elegance and uniqueness of Italian style.



TRILAMINATE GRIDDLE

As if 6 powerful burners wasn't enough, the addition of a Trilaminate griddle allows additional versatility to the cooking surface. With 11,500 BTU's of even heat, Sofia sears with conviction and the easy to care for surface will be beautiful for its entire lifetime.





DUAL BURNER WITH BRASS BURNER RING

For perfect control, easy cleaning, and lasting performance, the brass burner ring and the precision flame ports remain corrosion free.

CAST IRON GRATES AND MATTE BURNER BASIN

Heavy duty cast iron grates form a continuous surface for easy movement of pots and pans. You'll barely notice spillovers in this recessed burner basin and they'll clean up easily, too.



ROBUST CONTROL KNOBS

A perfect match for the bold design of the control panel, robust brushed metal knobs ensure easy handling and precise control while cooking.





CRESCENDO BURNER



Because precision is important for powerful high and gentle low flames, our sealed burners offer five combinations of flame configurations for near infinite control. Durable brass burner rings provide exceptional heat distribution to the base of the cooking vessel at its maximum output of 20,000 BTU and is also capable of the gentlest simmer aided by its oversized burner cap.











FORTE

At the peak of its 20,000 BTU capability, meat is seared to produce a crust worthy of your favorite chef. Large pots quickly recover to a rigorous boil, and no culinary conquest seems unattainable. All burner rings engage to produce the most powerful flame for cooking.

MEZZOFORTE

Perfect al dente pasta is a snap. Progressive control of the burner ensures maximum heat distribution without excessive flame for an even and moderate boil.

MEZZO

Creamy risotto and smooth custards come to life as the burner rings combine to provide enough heat to encourage the cooking but discourage scorching.

PIANOFORTE

Simmer, poach, or braise your way to a tender sauce, soup or stew. Flame curls around the diffuser cap to barely brush the base of the cooking vessel with perfect control for extended periods of low heat cooking.

PIANO

Melt butter, temper chocolate, or gently coax the flavor from savory vegetables, this lowest setting is achieved by the flame from the simmer burner rolling gently under the diffuser cap to radiate whisper soft heat.











AUTOGRAPH YOUR KITCHEN MAKE IT EXCLUSIVELY YOURS!

Customize your Sofia kitchen with your chosen name. Visit the Fulgor Milano website to create your personalized name plate for the oven door. The complimentary plate will be delivered to your home where your unique Sofia kitchen is exclusively yours.







THE ART OF COOKING EXPANDED



Thoughtfully designed surface cooking with six burner positions, each with a 5 in 1 Crescendo burner beneath continuous cast iron grates and a Trilaminate Stainless Steel griddle, providing unparalleled power and control to melt, simmer, saute, and sear as you desire. Below the cooking surface, two self cleaning convection ovens with intuitive multiple baking and broiling functions and the convenience of telescoping racks encourages you to cook the way you want.





TRILAMINATE GRIDDLE

Functional and beautiful with two unique types of stainless steel, for durability and easy cleaning, form a three layer griddle with the addition of aluminum for even and consistent heat distribution.

UNSURPASSED CRAFTSMANSHIP

Superior Italian steelmaking craftsmanship ensures perfectly polished edges and smooth corners, concealing screws and welds for an impeccable finish.

COOL TOUCH DOOR

4 layers of thermo-reflecting glass ensure the safety of a cool touch door while the oven is on - even at its highest temperature during the self-clean cycle.

CONVENIENCE OVEN

Identically featured as its larger mate, but without meat probe, this self-cleaning, multi function convection oven does everything in a smaller space, adding efficiency and flexibility. It even has a telescopic rack.

CAST IRON GRATES

Built to withstand searing heat and rapid temperature changes without losing their strength, continuous cast iron grates allow pans to be easily repositioned at your convenience.

SIX BURNERS

6 cooking zones, each with Crescendo burners create 5 levels of cooking power. At each level, the perfect combination of power and even distribution of heat allows precise results from temper to sear with a maximum 20,000 BTU. A combination of burner rings at different levels controls the relation of the flame to the bottom of the cooking vessel, allowing whisper soft heat for melting or rendering to ultra high searing and deglazing.

DUAL OVENS

Two self-cleaning convection ovens with multiple baking functions allow for ultimate flexibility, performance and capacity. Telescopic chrome oven racks allow for convenient inspection of dishes during cooking and effortless removal when done.

SOFT CLOSING DOOR

Robust stainless steel oven doors with wide viewing windows get an assist from shock absorbing hinges, facilitating an effortless soft closing oven.

SPECIAL TRILAMINATE STAINLESS STEEL GRIDDLE

The ultimate in performance and beauty, heat is evenly and uniformly distributed across the griddle surface allowing for golden pancakes, perfectly crusted steaks, and everything in between. With an easy to clean surface, the griddle resists discoloration at even the highest temperatures to remain unaffected for years to come.

GRIDDLE BURNER

11,500 BTU tubular aluminum burner with evenly distributed flame ports conducts heat to the griddle for optimal performance at maximum power. 2,000 BTUs at low power for more delicate foods. Sear a steak or make a golden griddle cake with ease.



3 METAL LAYERS GRIDDLE

SURGICAL STAINLESS STEEL

Provides unrelenting protection against corrosion, pitting, and discoloration, this non-reactive surgical grade stainless ensures easy cleaning and durability.

Allows for even heat distribution across the entire grilling surface from edge to edge for precise cooking and consistent browning.

STAINLESS STEEL

Establishes a stable and rigid foundation for a consistently flat and enduring direct cooking surface.

SOFIA PROFESSIONAL 48"

48" DUAL FUEL PROFESSIONAL RANGE





SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates Trilaminate Stainless Steel Griddle with Tubular Gas Burner 11,500 BTU high / 2,000 BTU low Matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

OVENS

Dual True Convection in main oven and True Convection in accessory oven Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights on main oven 1 Halogen light on convenience oven Gross capacity 4.4 cu. ft. and 2.7 cu. ft. 2 chromed racks 1 telescopic rack per oven



M

4

CODE ID

F6PDF486GS1

$\overline{\mathbf{n}}$	Heavy Duty Grates
	Continuous Grate Surface
	Dual Crescendo Burner
	Trilaminate Stainless Steel Griddle
9 8	Dual Convection (main oven)
X	True Convection (accessory oven)
\leq	Soft Closing Door
	Self Clean Ovens
$\overline{\mathscr{B}}$	Multi-level cooking
1	1 Telescopic Rack
*•	Cool Touch Door
10:00	Digital Controls
e l	Meat Probe (main oven)
ŝ	Fast Pre-Heat

OPTIONAL	ACCESSORIES
01 11010/L	

pay	

PDRKIT48	Color kit	90
MWOK	Wok ring	97
MSIM	Simmer plate	97
-6BG48BCI	Island trim	97
-6BG48STD	Standard trim	96
-6BG48HBT	High back trim	96
MTRP30	Telescopic rack	98
MTRP18	Telescopic rack	98
TECHNICAL DW	G	184

TECHNICAL DWG	184
TECHNICAL DATA	204

OVEN FUNCTIONS

Bake

- Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe on main oven only Self-Clean Sabbath Mode

SOFIA PROFESSIONAL 36"

36" DUAL FUEL PROFESSIONAL RANGE

COOKING



CODE ID F6PDF366S1

ð

4

\square Heavy Duty Grates Continuous Grate Surface Dual Crescendo Burner Dual Convection 88 $\underline{\mathcal{N}}$ Soft Closing Door Self Clean Oven R Multi-level cooking 1 Telescopic Rack Cool Touch Door Digital Controls 00:00 ź Meat Probe Fast Pre-Heat

OPTIONAL ACCESSORIES pag

PDRKIT36	Color kit	91
FMWOK	Wok ring	97
FMSIM	Simmer plate	97
F6BG36BCI	Island trim	97
F6BG36STD	Standard trim	96
F6BG36HBT	High back trim	96
FMGRID36	Griddle	97
FMTRP36	Telescopic rack	98
TECHNICAL DWG		185
TECHNICAL DATA	1	205

TECHNICAL DATA

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chromed racks 1 telescopic rack Enameled Broiler Pan

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean

OVEN FUNCTIONS

Sabbath Mode

SOFIA PROFESSIONAL 30"

30" DUAL FUEL PROFESSIONAL RANGE



SPECIFICATIONS

COOKING SURFACE

OVEN

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible)

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack Enameled Broiler Pan

ð

4

F6PDF304S1

	Heavy Duty Grates
	Continuous Grate Surface
4 4 4 4 4 4 4 4 5 10 10 1 1 10 10 10 10 10 10 10 10 10 10	Dual Crescendo Burner
8	Dual Convection
\leq	Soft Closing Door
•••	Self Clean Oven
<u>®</u>	Multi-level cooking
	1 Telescopic Rack
*	Cool Touch Door
00:00	Digital Controls
<u>e</u>	Meat Probe
ŝ	Fast Pre-Heat

OPTIONAL ACCESSORIES		pag
PDRKIT30	Color kit	91
FMWOK	Wok ring	97
FMSIM	Simmer plate	97
F6BG30BCI	Island trim	97
F6BG30STD	Standard trim	96
F6BG30HBT	High back trim	96
FMGRID30	Griddle	97
FMTRP30	Telescopic rack	98
TECHNICAL DWG		185

TECHNICAL DATA

OVEN FUNCTIONS

- Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Fast Pre-Heat Self-Clean Sabbath Mode

205

SOFIA PROFESSIONAL 36"

36" ALL GAS PROFESSIONAL RANGE





SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

NEW NOVA BROILER SYSTEM

Intense heat sears meats and fish locking injuices, with large broiling area. Ventilation in our All Gas Pro Ranges allows for closed door broiling, which ensures constant cooking.

OVEN

Dual Convection Oven temperature electronic control Nova Broiler System Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chromed racks 1 telescopic rack Enameled Broiler Pan

CODE ID F6PGR366S2

ð



SOFIA PROFESSIONAL 30"

30" ALL GAS PROFESSIONAL RANGE



OPTIONAL ACCESSORIES		pag
PDRKIT36	Color kit	91
FMWOK	Wok ring	97
FMSIM	Simmer plate	97
F6BG36BCI	Island trim	97
F6BG36STD	Standard trim	96
F6BG36HBT	High back trim	96
FMGRID36	Griddle	97
FMTRP36	Telescopic rack	98
TECHNICAL D	WG	185
TECHNICAL D	ATA	206

OVEN FUNCTIONS

Bake Broil Convection Pizza cooking mode 590 °F Dehydrate Timer Sabbath Mode

SPECIFICATIONS

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible)

NEW NOVA BROILER SYSTEM

Intense heat sears meats and fish locking injuices, with large broiling area. Ventilation in our All Gas Pro Ranges allows for closed door broiling, which ensures constant cooking.

OVEN

Dual Convection Oven temperature electronic control Nova Broiler System Black Porcelain enamel interior Cool to touch, soft closing door 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack Enameled Broiler Pan

ð

F6PGR304S2

	Heavy Duty Grates
	Continuous Grate Surface
	Dual Crescendo Burner
88	Dual Convection
\mathbf{X}	Soft Closing Door
*	Cool Touch Door
<u>®</u>	Multi-level cooking
	1 Telescopic Rack
00:00	Digital Controls
	Nova Broiler System

OPTIONAL ACCES	SORIES	pag
PDRKIT30	Color kit	91
FMWOK	Wok ring	97
FMSIM	Simmer plate	97
F6BG30BCI	Island trim	97
F6BG30STD	Standard trim	96
F6BG30HBT	High back trim	96
FMGRID30	Griddle	97
FMTRP30	Telescopic rack	98
TECHNICAL DWG		185
TECHNICAL DATA		206

OVEN FUNCTIONS

- Extra-large baking cavity and viewing area
- Bake Broil Convection Pizza cooking mode 590 °F Dehydrate Timer Sabbath Mode



PROFESSIONAL 36" DUCTION RANGE

consumption.





The Sofia induction range features powerful premium induction technology under an elegant glass surface featuring a new 11" Dual Max Power burner.

The instant response and precise control of induction is highlighted by the Digital Minute Minder control, paired beautifully with the easy to clean surface, offering maximum performance while minimizing energy

NEW

PROFESSIONAL

36" INDUCTION RANGE

10:22

FULGOR





Large pans receive full power for capacity and consistent heat distribution while cooking. The 11" Dual Induction Zone offers a fifth burner for any size pan at any power level for ultimate flexibility.

DIGITAL MINUTE MINDER CONTROL

COMMAND CONTROL KNOBS

Set it and forget it! The Digital Minute Minder chime will remind you of the end of the timer cycle.

Quick control, efficient and fast, a choice that combines style, practicality and professional touch.

SOFIA PROFESSIONAL 36"

36" INDUCTION PROFESSIONAL RANGE



Easy Clean Ceramic Glass $\langle \rangle$ Power Boost Burner \bigcirc Dual Max Power) Pan Detection system Residual Heat Sensor $\underline{\mathcal{N}}$ Soft Closing Door Self Clean Oven Multi-level cooking 1 Telescopic Rack Cool Touch Door **Digital Controls** Meat Probe $\widehat{\odot}$ Fast Pre-Heat

4

CODE ID

F6PIR365S1

OPTIONAL ACCESSORIES		pag
PDRKIT36	Color kit	91
F6BG36IND	Island trim	96
F6BG36STD	Standard trim	96
F6BG36HBT	High back trim	96
F6BG36BCI	Island trim	97
INDUKIT4	Induction plate adapters	98
FMTRP36 Telescopic rack		99
TECHNICA	DWG	185
TECHNICAL DATA		207

SPECIFICATIONS

COOKING SURFACE

4 Single Induction cooking zones 1 Dual Max Power with Ø 11" cooking zone Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function Knob Controlled Digital Minute Minder Pot Detection System Child Lock Function

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chromed racks 1 telescopic rack Enameled Broiler Pan

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean

Sabbath Mode

OVEN FUNCTIONS

SOFIA PROFESSIONAL 30"

30" INDUCTION PROFESSIONAL RANGE



SPECIFICATIONS

COOKING SURFACE

4 Single Induction cooking zones Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function Pot Detection System Child Lock Function Failure Codes Indication Automatic Heat-up Time

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch, soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack Enameled Broiler Pan

CODE ID

F6PIR304S1



Easy Clean Ceramic Glass Power Boost Burner Pan Detection system Residual Heat Sensor Soft Closing Door Self Clean Oven Multi-level cooking 1 Telescopic Rack Cool Touch Door Digital Controls Meat Probe Fast Pre-Heat

OPTIONAL ACCESSORIES		pag
PDRKIT30	Color kit	91
F6BG30IND	Island trim	96
F6BG30STD	Standard trim	96
F6BG30HBT	High back trim	96
F6BG30BCI	Island trim	97
INDUKIT4	Induction plate adapters	98
FMTRP30	Telescopic rack	99
TECHNICAL	DWG	185
TECHNICAL	DATA	207

OVEN FUNCTIONS

- Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode

SOFIA PROFESSIONAL 30"

RING cool 30" PROFESSIONAL SINGLE OVEN - STAINLESS STEEL



4 CODE ID

F6PSP30S1



SOFIA PROFESSIONAL 30"

30" PROFESSIONAL DOUBLE OVEN - STAINLESS STEEL



SPECIFICATIONS

OVEN	OVEN FUNCTIONS
Knob and electronic controls	Bake
Dual True Convection	Broil
Self-cleaning oven with Multifunction baking	Roast
Black Porcelain enamel interior	Convection
Cool to the touch, soft closing door	True Convection
Extra-large baking cavity and viewing area	Warm / Proof / Dehydrate
3 Halogen lights for flawless visibility	Electronic cooking programmer
Gross capacity 4.4 cu. ft.	Meat Probe
2 chromed racks	Self-Clean
1 telescopic rack	Sabbath Mode
Enameled Broiler Pan	

 OPTIONAL ACCESSORIES		pag
PDRKIT30 FMTRP30	Color kit Telescopic rack	92 98
TECHNICAL D	WG	198
TECHNICAL DATA		218

SPECIFICATIONS

OVENS
Knob and electronic controls
Dual True Convection
Self-cleaning oven with Multifunction baking
Black Porcelain enamel interior
Cool to the touch, soft closing door
Extra-large baking cavity and viewing area
3 Halogen lights for flawless visibility
Gross capacity 4.4 cu. ft. per oven
2 chromed racks
1 telescopic rack per oven
Enameled Broiler Pan

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe (Upper Oven Only) Self-Clean Sabbath Mode

OVEN FUNCTIONS

40 FULGOR MILANO

F6PDP30S1

& &	
Ň	
•••	
$\underline{\widehat{\circledast}}$	
*	

Dual Convection

Soft Closing Door

Self Clean Ovens

- Multi-level cooking
- 1 Telescopic Rack per oven





Meat Probe (Upper Oven Only)



Fast Pre-Heat

논옷 Interior Lighting

OPTIONAL ACCESSORIES		pag
PODKIT30	Color kit upper door	92
PDRKIT30	Color kit lower door	92
NOTE:		
	chase order, remember olor kits for the upper	
FMTRP30	Telescopic rack	98
TECHNICAL I	DWG	198
TECHNICAL I	DATA	218

NEW

PROFESSIONAL **30**" WARMING DRAWER



More than a warming drawer, this functional appliance can slow cook, proof, leaven, and defrost in its compact and fully enclosed space. Warm plates, hold side dishes warm for serving, keep pies warm for dessert, allow homemade bread to rise to perfection.

SOFIA PROFESSIONAL 30"

30" PROFESSIONAL WARMING DRAWER - STAINLESS STEEL





SPECIFICATIONS

WARMING DRAWER 30"

DRAWER 30" FUNCT

Knob Control Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft. Convection heating system for even heat distribution All stainless steel structure Warming Temperature range; min. 86 °F up to 190 °F Slow closing assistance 2 Internal lights Non-slip rubber mat

Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 °F up to 190 °F



CODE ID

F6PWD30S1



Sliding Telescopic Rails

Keep Warm Function



Leavening



Slow Cooking



J-

Thawing

Soft Closing

	OPTIONAL ACCESSORIES		pag
TIONS	PWDKIT30	Color kit	93
	TECHNICAL DWG TECHNICAL DATA		198 219



SOFIA PROFESSIONAL 36"

36" PROFESSIONAL GAS RANGE TOP



SPECIFICATIONS

GAS RANGE TOP

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible) Electric Re-ignition system Flame-out Sensing Top Mount Injectors



F6GRT366S1



Heavy Duty Grates

Continuous Grate Surface

Dual Crescendo Burner

OPTIONAL ACCESSORIES		pag
FMWOK	Wok ring	97
FMSIM F6BG36BCI	Simmer plate Island trim	97 97
F6BG36STD Standard trim		97 96
F6BG36HBT	High back trim	96
FMGRID36	Griddle	97
TECHNICAL DWG		196
TECHNICAL DATA		220

SOFIA PROFESSIONAL 30"

30" PROFESSIONAL GAS RANGE TOP



 Image: Ward with the service of the

ð

CODE ID

F6GRT304S1

SOFIA PROFESSIONAL 30"

30" PROFESSIONAL INDUCTION RANGE TOP





OPTIONAL ACCESSORIES

FMWOK	Wok ring	97
FMSIM	Simmer plate	97
F6BG30BCI	Island trim	97
F6BG30STD	Standard trim	96
F6BG30HBT	High back trim	96
FMGRID30	Griddle	97
TECHNICAL DWG		196
TECHNICAL DATA		220

pag

SPECIFICATIONS

INDUCTION RANGE TOP

4 Single Induction cooking zones Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power on Indicators Melting and Simmering functions Pot Detection System Child Lock Function Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time

COOKING

SPECIFICATIONS

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible) Electric Re-ignition system Flame-out Sensing Top Mount Injectors

F6IRT304S1

\approx
00:00

Easy Clean Ceramic Glass

Power Boost Burner

Pan Detection system



Residual Heat Sensor



OPTIONAL ACCESSORIES		pag
F6BG30IND	Island trim	96
F6BG30STD	Standard trim	96
F6BG30HBT	High back trim	96
F6BG30BCI	Island trim	97
INDUKIT4	Induction plate adapters	99
TECHNICAI	DWG	196
TECHNICAL DATA		221

COOKING

FULGOR MILANO

PROFESSIONAL PRO GAS COOKTOP



STRONG, POWERFUL, DISTINCTIVE

With sleek lines, a continuous surface grate over powerful brass burners, and LED illuminated controls, the Sofia cooktop combines elegant design, responsive performance, and thoughtful convenience. Sofia enters a new realm with this low profile cooktop allowing design flexibility for your kitchen. Enjoy the power of a 20,000 BTU Dual Brass Burner of this Sofia cooktop while using the additional 4 Dual Stacked burners, designed to surpass all of your expectations. New Halo Effect knobs let you know at a glance if the gas is on or if residual heat is present, giving you peace of mind at every turn. Continuous cast iron grates offer an even cooking surface for easy movement of pans from burner to burner so that even your biggest cooking events can be handled with ease.



NEW

COOKING

HALO VISION HEAT MADE VISIBLE



$HALO\ CONTROL$ for when the gas is on

Have you ever walked away from your cook top forgetting a burner is on?

Whether you are searing a steak or tempering chocolate, the glowing halo of white light will alert you to a burner that is on. Walk away from the kitchen with confidence, knowing that your burners are safely off when the halo disappears.






HALO SAFE residual heat indicator

A Professional cook top would not be complete without powerful burners and strong cast iron grates. These grates can continue to radiate a heat, even after the burner is off. Protect yourself and your family with our Halo Safe system. A red Halo light around the control knob indicates the presence of residual heat at the grate.

SOFIA PROFESSIONAL 36"

36" PROFESSIONAL PRO GAS COOK TOP





ð

CODE ID

F6PGK365S1

SOFIA PROFESSIONAL 30"

30" PROFESSIONAL PRO GAS COOK TOP





SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Solid Brass Dual Flame Burner with 20.000 BTU Max (NG) 4 Solid Brass Stacked Burners with 15.000 BTU Max (NG) Backlit Control Knob indicates burner operation (White) Backlit Control Knob indicates residual heat (Red) Heavy duty control panel Large cooking area Full pot stability Natural Gas (LP Convertible)



OPTIONAL ACCESSORIES		pag
FMWOK FMSIM	Wok ring Simmer plate	97 97
TECHNICAL DWG197TECHNICAL DATA222		

SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Solid Brass Dual Flame Burner with 20.000 BTU Max (NG) 2 Solid Brass Rapid Burners with 10.500 BTU Max (NG) 2 Solid Brass Semirapid Burners with 8.000 BTU Max (NG) Backlit Control Knob indicates burner operation (White) Backlit Control Knob indicates residual heat (Red) Heavy duty control panel Large cooking area Full pot stability Natural Gas (LP Convertible)



ð

CODE ID

F6PGK305S1



Knob control with back light system

1 Center Dual Burner

4 Single Burners



Heavy Duty Grates

Continuous Grate Surface

Heavy Duty Control Panel





OPTIONAL ACCESSORIES

pag

FMWOK	Wok ring	97
FMSIM	Simmer plate	97

NOTE:

Wok ring (FMWOK) to be used with centre burner only.

TECHNICAL DWG	197
TECHNICAL DATA	223


COOKING



ACCENTO

Inspired by traditional professional styling, our ACCENTO professional range features a classic bullnose design over elegant yet strong knob controls. The ACCENTO professional range will stand out in your kitchen with color kits that are customizable and allow for multiple variations of color expression. Newly designed continuous cast iron grids offer a safe support surface while ensuring the achievement of professional performance and optimal thermal dynamics.





burner bowl allows for seamless, easy cleaning. The matte black is a perfect compliment to the grates and burner caps.



PROFESSIONAL







One piece matte black, porcelain Accentuate the satin stainless steel finish of the ACCENTO range with a customizable color kit of your choosing.

PROFESSIONAL ACCENTO



STYLE DETAILS

Adding an "accent" of color has never been easier with Fulgor Milano's unique color kit system for the ACCENTO range. Each color kit comes with a matching door, toe kick and control panel accent trim providing endless possibilities to mix and match. If beauty is in the details, there is no question our new ACCENTO range is ready for the red carpet. From the sculpted lines of the handles and grates, to the symmetry of the lines top to bottom, no detail was overlooked.









FULGOR

MILANO

THE STRENGTH OF ITALIAN DESIGN

ACCENTO



Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable. With the kitchen returning to the center of the home, color is an important component of design and can bring unity and harmony into your space.





ACCENTO PROFESSIONAL 36"

36" DUAL FUEL PROFESSIONAL RANGE



OVEN

Dual True Convection

Cool to the touch door

Gross capacity 5.7 cu. ft.

Enameled Broiler Pan

2 chromed racks

Black Porcelain enamel interior

Self-cleaning oven with Multifunction baking

Extra-large baking cavity and viewing area

3 Halogen lights for flawless visibility



ð

4

CODE ID

F4PDF366S1

ACCENTO PROFESSIONAL 30"

30" DUAL FUEL PROFESSIONAL RANGE



OPTIONAL ACCESSORIES		pag
ACDKIT36	Color kit	83
FMWOK	Wok ring	87
FMSIM	Simmer plate	87
F6BG30BCI Island trim		87
F6BG30STD Standard trim		86
F6BG30HBT High back trim		86
FMGRID30	Griddle	87
FMTRP30 Telescopic rack		88
TECHNICAL DWG		187

TECHNICAL DWG	187
TECHNICAL DATA	212

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Fast Pre-Heat Self-Clean Sabbath Mode

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 2 Dual-Flame Crescendo Burners 2 X 18,000 BTU max (NG) 2 Rapid Burners 2 X 15,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks Enameled Broiler Pan

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates

3 Dual-Flame Crescendo Burners

3 X 18,000 BTU max (NG)

3 X 15,000 BTU max(NG)

Natural Gas (LP convertible)

3 Rapid Burners

One piece, matte finish porcelain burner bowl

ð

4

F4PDF304S1

	Heavy Duty Grates
	Continuous Grate Surface
**** ****** ******* *******	Dual Crescendo Burner
88	Dual Convection
•••	Self Clean Oven
<u>®</u>	Multi-level cooking
*	Cool Touch Door
00:00	Digital Controls
ŝ	Fast Pre-Heat

OPTIONAL ACCESSORIES		pag
ACDKIT30	Color kit	83
FMWOK	Wok ring	87
FMSIM	Simmer plate	87
F6BG30BCI	Island trim	87
F6BG30STD	Standard trim	86
F6BG30HBT	High back trim	86
FMGRID30	Griddle	87
FMTRP30	Telescopic rack	88
TECHNICAL DWG	ì	187
TECHNICAL DATA		212

OVEN F	UNCTIONS	

- Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Fast Pre-Heat Self-Clean Sabbath Mode

ACCENTO PROFESSIONAL 36"

36" ALL GAS PROFESSIONAL RANGE

COOP





ð

λ

CODE ID

F4PGR366S1

ACCENTO PROFESSIONAL 30"

30" ALL GAS PROFESSIONAL RANGE



OPTIONAL ACCESSORIES		pag
ACDKIT36	Color kit	83
FMWOK	Wok ring	87
FMSIM	Simmer plate	87
F6BG30BCI Island trim		87
F6BG30STD	Standard trim	86
F6BG30HBT	High back trim	86
FMGRID30	Griddle	87
FMTRP30 Telescopic rack		88
TECHNICAL DWG		187

TECHNICAL DWG	187
TECHNICAL DATA	212

OVEN FUNCTIONS

Bake Broil Convection Pizza cooking Dehydrate Timer

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 2 Dual-Flame Crescendo Burners 2 X 18,000 BTU max (NG) 2 Rapid Burners 2 X 15,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual Convection Black Porcelain enamel interior Cool to touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 Cromed racks Enameled Grill set

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 3 Dual-Flame Crescendo Burners 3 X 18,000 BTU max (NG) 3 Rapid Burners 3 X 15,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual Convection Black Porcelain enamel interior Cool to touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chromed racks Enameled Grill set

ð

λ

F4PGR304S1



Heavy Duty Grates

Continuous Grate Surface

Dual Crescendo Burner



Dual Convection Cool Touch Door



Multi-level cooking

 O_{5}

Digital minute minder

OPTIONAL ACCESSORIES		pag
ACDKIT30	Color kit	83
FMWOK	Wok ring	87
FMSIM	Simmer plate	87
F6BG30BCI	Island trim	87
F6BG30STD	Standard trim	86
F6BG30HBT	High back trim	86
FMGRID30	Griddle	87
FMTRP30	Telescopic rack	88
TECHNICAL DWG	ì	187
TECHNICAL DATA		212

OVEN FUNCTIONS

Bake Broil Convection Pizza cooking Dehydrate Timer

PROFESSIONAL HOODS 600 SERIES

Complete your powerful Sofia cooking suite with a matching wall mounted vent hood designed to keep your kitchen environment free from smoke, cooking residue, and excess heat. Motors in sturdy housings combine with Pro Baffle filters to quietly whisk away the effects of your culinary adventures. Your hood allows fresh air to circulate freely in your home, while overhead LED illumination highlights your Sofia cooking surface. Like jewelry for your home, hoods offer the very best of function and design. Your well ventilated kitchen will thank you for it!







LED LIGHTING UNIFORM CONTROLS

To get the best possible view of your culinary creations while you work, illuminate the entire cooking surface with 6 high powered LED lights. When you are finished cooking, Sofia can bask in the lower level lighting, casting your kitchen as the star of your home.

ADJUSTABLE DUAL MOTORS WITH DIRECT INDIVIDUAL MOTOR CONTROL

At the heart of the hood, dual motors are housed separately in sturdy bodies, keeping noise and vibration to a minimum. Quiet enough to be unnoticed even at its maximum 1000 cfm speed, the hood works hard to whisk away heat, smoke, odor and moisture, keeping your kitchen fresh and clean while you entertain your family and friends.







SOFIA PROFESSIONAL SERIES 600 48"

48" PROFESSIONAL HOOD



SPECIFICATIONS

HOOD

Scotch brite stainless steel (AISI 430) Heavy Duty Control Panel with Knobs 4 + 4 Speed Mechanical Control LED lighting Led 6x1,2 W - 3200 K Double fan motors 1000 CFM 75 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm



4

CODE ID

F6PH48DS1

111	Filteri
<u> </u>	CFM
	6 LEI
**	Noise
	\M/oll I

Filtering

CFM max 1000

6 LED lamps

Noise Level 75 (dB)

Wall hung installation

F6CK48-12 FMFIL	Chimney cover Charcoal filter	100 100
TECHNICAL DWG		189
TECHNICAL DATA		218

OPTIONAL ACCESSORIES

pag

SOFIA PROFESSIONAL 600 SERIES 36"

36" PROFESSIONAL HOOD









SOFIA PROFESSIONAL 600 SERIES 30"

SPECIFICATIONS

HOOD F6PH36DS1

Scotch brite stainless steel (AISI 430) Heavy Duty Control Panel with Knobs 4 + 4 Speed - Mechanical Control LED lighting: Led 4x1.2 W - 3200 K Dual fan motors CFM max 1000 75 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

HOOD F6PH36S1

Scotch brite stainless steel (AISI 430) Slider controls LED lighting: Led 2x1.2 W - 3200 K One fan motor CFM max 600 72 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

OPTIONAL ACCESSORIES	pag

F6CK36-12	Chimney cover	100
FMFIL	Charcoal filter	100
TECHNICAL DWG	ì	190
TECHNICAL DATA	A	218

SPECIFICATIONS

HOOD F6PH30S2

Scotch brite stainless steel (AISI 430) Heavy Duty Control Panel with Knobs 4 Speed - Mechanical Control LED lighting: Led 4x1.2 W - 3200 K One fan motor CFM max 600 72 dB sound rating Baffle filter Minimum distance: - Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

HOOD F6PH30S1

Scotch brite stainless steel (AISI 430) Slider controls LED lighting: Led 2x1.2 W - 3200 K One fan motor CFM max 600 72 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm _

F6PH30S1





111	Filtering
<u> II</u> r	CFM ma
	2 LED la
***	Noise Le
Ļ	Wall hun

max 600 lamps

e Level 72 (dB)

nung installation

CODE ID

F6PH30S2		1 FAN - KNOBS
111	Filtering	
մր	CFM max 600	
7	4 LED lamps	
**	Noise Level 72	(dB)
Ļ	Wall hung insta	Illation



 OPTIONAL ACCESSORIES		pag
F6CK30-12 FMFIL	Chimney cover Charcoal filter	100 100
TECHNICAL DW		190 218

SOFIA PROFESSIONAL 600 SERIES 48"

48" PROFESSIONAL INSERT HOOD



Overall dim - width

Overall dim - height

Overall dim - depth

Power cord + Plug

Cut out (wxd)

Cut out (wxd)

Gross weight

Net weight KW rating

45-3/4" -116 cm

13-1/8" - 33 cm

18-1/2" - 47 cm

43-7/16" x 16-1/2"

110.3 x 41.9 cm

68 lbs - 31 kg

57 lbs - 26 kg

860 W 3.8 A



4

CODE ID

F6BP46DS1

SOFIA PROFESSIONAL 600 SERIES 36"

36" PROFESSIONAL INSERT HOOD



SPECIFICATIONS

INSERT HOOD

Baffle filter

75 dB sound rating

Minimum distance:

Scotch brite stainless steel (AISI 430)

Heavy Duty Control Panel with Knobs

LED lighting: Led 6x1,2 W - 3200 K

4 + 4 Speed - Mechanical Control

Dual fan motors - CFM max 1000

- Electric hob 20 1/2" - 52 cm

- Gas hob 24 3/4" - 63 cm

OPTIONAL	ACCESSORIES
----------	-------------

pag

100

191

219

FMFIL	Charcoal filter
TECHNICAL DWG TECHNICAL DATA	

SPECIFICATIONS

INSERT HOOD

Scotch brite stainless steel (AISI 430) Heavy Duty Control Panel with Knobs LED lighting: Led 4x1,2 W - 3200 K		ntrol Panel with Knobs	Overall dim - width Overall dim - height Overall dim - depth	34-1/4 13-1/8 18-1/2
	4 + 4 Speed -	Mechanical Control	Cut out	32-1/16" >
	Baffle filter		Cut out	81.4 x
	Dual fan motor 75 dB sound ra	s - CFM max 1000 ating	Gross weight Net weight	60 lbs 51 lbs
	Minimum dista	nce:	KW rating	860
		20 1/2" - 52 cm 24 3/4" - 63 cm	Power cord + Plug	



4

CODE ID

F6BP34DS1



Filtering

CFM max 1000

4 LED lamps

Noise Level 75 (dB)

Ceiling installation

	OPTIONAL ACCESSORIES		pag
	FMFIL	Charcoal filter	100
34-1/4" - 87 cm			
13-1/8" - 33 cm	TECHNICAL DWG		191
18-1/2" - 47 cm	TECHNICAL DATA		219
2-1/16" x 16-1/2"			
81.4 x 41.9 cm			

60 lbs 27 kg

51 lbs - 23 kg

860 W 3.8 A

PROFESSIONAL **KIDG** E

COLD TEMP. TOTAL CONTROL.

As beautiful as it is functional, the Sofia Professional Fridge and Wine Series features brushed stainless exteriors for maximum impact and a brilliant white aluminum interior. Food preservation is key and like the rest of the Professional Series, we combine the latest technology to ensure the highest performance. Dual compressors provide independently controlled cooling zones with consistent and precise temperatures throughout, to ensure that the finest foods and wines stay fresher longer.

Robust doors on the Fridge and triple layer UV protected glass on the Wine Cellar protect contents from external temperature and humidity changes which can be damaging to your stored items.





PROFESSIONAL FRIDGE&WINE





FLEXZONE

FRIDGE

Fridge, Fresco, or Freezer: you can decide on a whim! Need more space for cold drinks? Turn the bottom Flexzone drawer into a Fresco compartment through a simple menu. You have the flexibility to manage your food preservation how you desire.

ICE MAKER

Located in the upper section of the Flexzone drawer, the ice maker uses purified water from the integrated filtering system to produce up to 2.2 lbs of your desired sized cube. Activate Superlce and increase ice production to 3.3 lbs.

WINE CELLAR

Natural beechwood shelves accommodate various sized bottles for secure storage and can even be completely removed for greater flexibility. In addition to humidity and temperature control, Wine Cellars utilize anti-vibration technology and triple pane bronze glass doors to reduce UV rays, protecting your wine collection from external conditions.




SOFIA PROFESSIONAL WINE CELLAR 24"

24" PROFESSIONAL WINE CELLAR





4

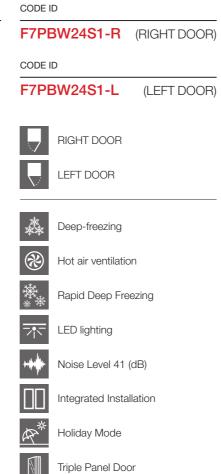

54 Bottles Capacity

SOFIA PROFESSIONAL FRIDGE 36"

36" PROFESSIONAL FRIDGE



SPECIFICATIONS

WINE CELLAR

Cave Storage Compartment, Natural Wood Shelves, for 36 bottles Wine Cellar Compartment, Natural Wood Shelves, for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting Brilliant white aluminium interior FlexZone Bottom Drawer

OPTIONAL ACCESSORIES	pag
REFSBSPRO60 Coupling kit with a 36" fridge	101
TECHNICAL DWG	192
TECHNICAL DATA	221

SPECIFICATIONS

FRIDGE

Fridge Compartment Flexzone Bottom Drawer Total No Frost Stainless Steel Crisper Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior



CODE ID

F7PBM36S1-R (RIGHT DOOR)

CODE ID

F7PBM36S1-L (LEFT DOOR)



RIGHT DOOR



LEFT DOOR

0 C° ₩≛*₫* **

Cool Zone 0°C

- Deep-freezing
- \bigotimes Hot air ventilation



** *

AP*

*

- Total No Frost
- Rapid Deep Freezing
- **∼**¦∼ LED lighting
- ** Noise Level 41 (dB)
 - Integrated Installation
 - Holiday Mode
 - Ice Maker

OPTIONAL ACCESSORIES pag REFSBSPRO60 101 Coupling kit with a 24" wine cellar REFSBSPR072 Two 36" Fridges coupling kit 101 **TECHNICAL DWG** 192 **TECHNICAL DATA** 220

BUILT-IN WINE CELLAR 24"

24" PROFESSIONAL BUILT-IN WINE CELLAR



4

CODE ID F7IBW24O1-R (RIGHT DOOR) CODE ID F7IBW24O1-L (LEFT DOOR) **RIGHT DOOR** LEFT DOOR Deep-freezing R Hot air ventilation ** Rapid Deep Freezing **∼**i∖⁻ LED lighting Noise Level 41 (dB) Integrated Installation R Holiday Mode Triple Panel Door 54 Bottles Capacity



OPTIONAL ACCESSORIES	
REFHANDPRO24 Sofia Wine Cellar Pro Handle Kit REFSBSINT60 Coupling kit	
TECHNICAL DWG	
TECHNICAL DATA	

BUILT-IN FRIDGE 36"

36" PROFESSIONAL BUILT-IN FRIDGE



SPECIFICATIONS

WINE CELLAR

Cave Storage Compartment, Natural Wood Shelves, for 36 bottles Wine Cellar Compartment, Natural Wood Shelves, for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting Brilliant white aluminium interior FlexZone Bottom Drawer **Overlay Panel**

SPECIFICATIONS

FRIDGE

Fridge Compartment Flexzone Bottom Drawer Total No Frost Stainless Steel Crisper Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior **Overlay Panel**

80 FULGOR MILANO



CODE ID

4

F7IBM36O1-R (RIGHT DOOR)

CODE ID

F7IBM36O1-L (LEFT DOOR)



RIGHT DOOR



LEFT DOOR

0 C° ₩≛*₫* **

Cool Zone 0°C

- Deep-freezing
- \bigotimes Hot air ventilation



AP*

Total No Frost

Rapid Deep Freezing

- **∼**¦∼ LED lighting
- ** Noise Level 41 (dB)
 - Integrated Installation
 - Holiday Mode
- * Ice Maker



OPTIONAL ACCESSORIES		pag
REFHANDPRO36 REFSBSINT60	Sofia Fridge Pro Handle Kit Coupling kit	
TECHNICAL DWG TECHNICAL DATA		193 230



SOFIA PROFESSIONAL DISHWASHER 24"

24" INTEGRATED DISHWASHER WITH STAINLESS STEEL PROFESSIONAL EXTERIOR



FULGOR

SPECIFICATIONS

DISHWASHER

Quiet plus – 49 dB Stainless steel interior tub 10 wash cycles Fast wash cycles Adjustable height upper rack 13 place settings Concealed heating element Extreme wash (sanitization) Professional Handle





CODE ID

F6PDW24SS1





Noise Level 49 (dB)



Steel Tub



 \mathbb{D}


0-24h

Fast Wash Cycle

China and Crystal Cycle

1/2 Load Cycle

Delayed Start





	pag
TECHNICAL DWG	202
TECHNICAL DATA	222



PROFESSIONAL ACCESSIONAL OPTIONAL





ACCESSORIES



PERSONALIZE WITH COLOR

Your cooking style is personal and now you can easily personalize your kitchen with color. Dress Sofia in vibrant Venetian Red, snowy Palladio White, glistening Gondola Black, sumptuous Black Velvet, or glistening Rialto Grey. With a Sofia Color Kit, making a change is breeze, simply replace the door and one piece toe-kick whenever the mood strikes you. Sofia can even change with the seasons to make your kitchen alive with color.

COLOR KIT

FREEDOM TO CHOOSE COLOR



VENETIAN RED

GLOSSY RED - RAL 3003

ACCESSORIE:

FULGOR



48" PROFESSIONAL RANGE DOOR - COLOR KIT

OPTIONAL ACCESSORIES

36"- 30" PROFESSIONAL RANGE DOOR - COLOR KIT





48" PRO RANGE DOOR

CODE PDRKIT48MB

CODE PDRKIT48RD



48" PRO RANGE DOOR

000000 ううう PULCON

RIALTO GREY	MATTE GREY - RAL 9007 "SLATE"	
48" PRO RANGE DO	OOR CODE PDRKIT48MG	



STANDARD VERSION

STAINLESS STEEL



GONDOLA BLACK GLOSSY BLACK - RAL 9004

36" PRO RANGE DOOR 30" PRO RANGE DOOR

CODE PDRKIT36BK CODE PDRKIT30BK

CODE PDRKIT30MW



PALLADIO WHITE	GLOSSY WHITE - RAL 9016
36" PRO RANGE DOOR	CODE PDRKIT36WH
30" PRO RANGE DOOR	CODE PDRKIT30WH
	MATTE WHITE - RAL 9016
36" PRO RANGE DOOR	CODE PDRKIT36MW

30" PRO RANGE DOOR





48" PRO RANGE DOOR

CODE PDRKIT48BK



PALLADIO WHITE	GLOSSY WHITE - RAL 9016	
48" PRO RANGE DOOR	CODE PDRKIT48WH	
	MATTE WHITE - RAL 9016	
48" PRO RANGE DOOR	CODE PDRKIT48MW	

ŝ



36" PRO RANGE DOOR

D

VENETIAN RED

BLACK VELVET

CODE PDRKIT36MB

FULCOR

CODE PDRKIT30MB

GLOSSY RED - RAL 3003

m

MATTE BLACK - RAL 9004

RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

CODE PDRKIT36MG CODE PDRKIT30MG

36" PRO RANGE DOOR

30" PRO RANGE DOOR







30" PRO DOUBLE OVEN DOOR - COLOR KIT

OPTIONAL ACCESSORIES

30" WARMING DRAWERS - COLOR KIT

For color kit purchase order, remember to order both color kits for the upper and lower door.



STANDARD VERSION

STAINLESS STEEL



GONDOLA BLACK GLOSSY BLACK - RAL 9004

30" Pro Upper Door 30" Pro Range Lower Door CODE PODKIT30BK CODE PDRKIT30BK



PALLADIO WHITE GLOSSY WHITE - RAL 9016

30" Pro Upper Door	CODE PODKIT30WH
30" Pro Range Lower Door	CODE PDRKIT30WH

CODE PDRKIT30WH MATTE WHITE - RAL 9016 CODE PODKIT30MW CODE PDRKIT30MW 30" Pro Range Lower Door



BLACK VELVET MATTE BLACK - RAL 9004 30" Pro Upper Door CODE PODKIT30MB

30" Pro Range Lower Door

CODE PDRKIT30MB



VENETIAN RED

GLOSSY RED - RAL 3003

30" Pro Upper Door 30" Pro Range Lower Door CODE PODKIT30RD CODE PDRKIT30RD



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

30" Pro Upper Door 30" Pro Range Lower Door CODE PODKIT30MG CODE PDRKIT30MG



STANDARD VERSION STAINLESS STEEL



GONDOLA BLACK	GLOSSY BLACK - RAL 9004
30" Warming Drawers	CODE PWDKIT30BK



PALLADIO WHITE	GLOSSY WHITE - RAL 9016
30" Warming Drawers	CODE PWDKIT30WH
	MATTE WHITE - RAL 9016
30" Warming Drawers	CODE PDRKIT30MW

92 FULGOR MILANO

30" Pro Upper Door



BLACK VELVET

MATTE BLACK - RAL 9004

30" Warming Drawers

CODE PWDKIT30MB



VENETIAN RED

GLOSSY RED - RAL 3003

30" Warming Drawers

CODE PWDKIT30RD



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

30" Warming Drawers

CODE PWDKIT30MG

FULGOR MILANO

PROFESSIONAL ACCENTO

NHB STRENGTH JAN ESIGN **IN COLOR**

Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable. With the kitchen returning to the center of the home, color is an important component of design and can bring unity and haramony into your space.

36"- 30" ACCENTO RANGE DOOR - COLOR KIT



STANDARD VERSION

STAINLESS STEEL



36" ACCENTO RANGE DOOR CODE ACDKIT36MW 30" ACCENTO RANGE DOOR CODE ACDKIT30MW





BLACK VELVET

MATTE BLACK - RAL 9004

36" ACCENTO RANGE DOOR 30" ACCENTO RANGE DOOR CODE ACDKIT36MB CODE ACDKIT30MB



VENETIAN RED

GLOSSY RED - RAL 3003

36" ACCENTO RANGE DOOR 30" ACCENTO RANGE DOOR CODE ACDKIT36RD CODE ACDKIT30RD

PROFESSIONAL BACK GUARD TRIM

OPTIONAL ACCESSORIES

CODE F6BG48HBT


CODE F6BG36HBT

PROFESSIONAL GAS




48" Black Cast Iron - Island Trim

CODE F6BG48BCI

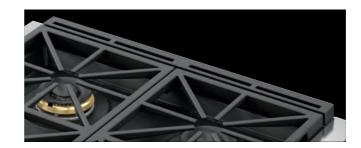

30" Black Cast Iron - Island Trim

CODE F6BG30BCI

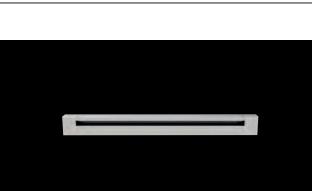

30" Back Guard - 3" Standard Trim

48" Back Guard - 3" Standard Trim



CODE F6BG48STD

CODE F6BG36STD



30" Back Guard - High Back Trim

48" Back Guard - High Back Trim

36" Back Guard - High Back Trim

CODE F6BG30HBT



36" Heavy duty enamelled Cast-Iron griddle

CODE FMGRID36



36" Back Guard – Induction Island Trim

CODE F6BG36IND



30" Back Guard – Induction Island Trim


CODE F6BG30IND



WOK RING

CODE FMWOK

For best results with a wok, use this accessory with high-BTU burner specifically creactiveed for wok cooking.

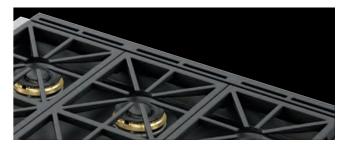

36" Black Cast Iron - Island Trim

CODE F6BG36BCI



30" Heavy duty enamelled Cast-Iron griddle

CODE FMGRID30



SIMMER PLATE

CODE FMSIM

The cast-iron simmer plate provides a steady simmer temperature, evenly distributed across a stable heating surface

PROFESSIONAL INDUCTION



36" Telescopic rackCODE FMTRP36Telescopic rack for 36" Professional range



30" Telescopic rack CODE **FMTRP30** Telescopic rack for 30" Professional range and built-in oven





18" Telescopic rack CODE **FMTRP18** Telescopic rack for 18" Oven on 48" Professional range




Trilaminate magnetic plates for non induction pots

CODE INDUKIT4



OPTIONAL ACCESSORIES

PROFESSIONAL CONSERVATION / WINE COOLER

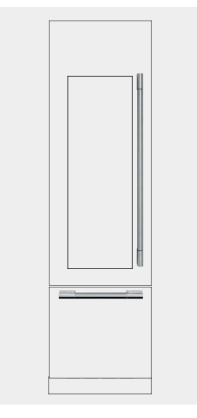

Sofia Wine Cellar Pro Handle Kit

CODE REFHANDPRO24




Chimney cover for model F6PH48DS1 - 12" high

CODE F6CK48-12

Chimney cover for model F6PH36S1 and F6PH36DS1 - 12" high CODE F6CK36-12



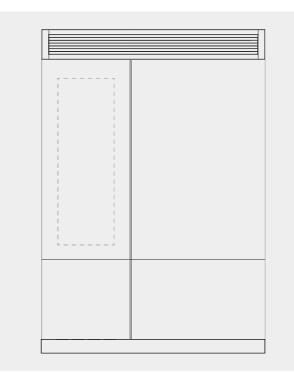

36" Pro Fridge and 24" Pro Wine Cellar Installation Kit; Top Grate, Toe Kick, Vertical Gasket Strip and Insulation Panel.

CODE REFSBSPRO60

Two 36" Pro Fridges Installation Kit; Top Grate, Toe Kick, Vertical Gasket Strip and Insulation Panel. CODE REFSBSPR072




CODE FMFIL

Charcoal filters (for recirculating installations)



Chimney cover for model F6PH30S1 and F6PH30S2 - 12" high CODE F6CK30-12

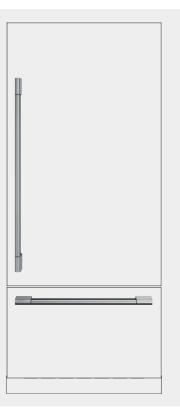

Sofia Fridge Pro Handle Kit

CODE REFHANDPRO36

36" Built-In Fridge and 24" Built-In Wine Cellar Installation Kit.

CODE REFSBSINT60

DISTINTO LINE





CREARE, IMMAGINARE, VIVERE



This powerful line of products that has, in essence, modularity and the linear stroke of its distinctive features. Like a chef who moves with ease and grace in the kitchen, intuitive displays allow simple recall of recipes and specialties.

The functionality of these new ovens equally matches our modern lifestyle, effortlessly allowing us to make the most of our culinary creations. This new standard is the symbol of modernity, created in Italy.



FULGOR MILANO





Our Creactive control system combines modern technology with simplicity. The touch screen simplifies all procedures and enhances performance by reducing energy consumption while intensifying cooking modes. The automatic function control system has safety features providing worry-free operation.





STUFFED ROAST VEAL WEIGHT ۲۶ Kg 1500g TIME Time 01:15 PREHEAT I 17:06

 ∇

 \bigcirc

 \triangle

 (\mathbf{I})

TOUCH CONTROL PANEL

Everything is under your control with just a touch on the Creactive display.

INTUITIVE

It only takes a moment to easily find the desired function.

MULTITASKING

All functions help to get the best results while preparing your recipes.

CUSTOMIZABLE RECIPES

Recipes to suit every palate have been pre-programmed, but you can modify and customize them to your specific requirements.

DISTINTO OVENS CREACTIVE

OUR CREACTIVE CONTROL SYSTEM **COMBINES MODERN TECHNOLOGY WITH SIMPLICITY**

The CREACTIVE operating system combines technology with ease of use. The touch screen simplifies the programming process of the ovens and enhances performance by reducing energy consumption and increasing cooking functions.

COOKING

FULGOR MILANO

CREACTIVE

ASSISTED COOKING FUNCTION

CONTROL SYSTEM

No more doubts when picking the most suitable cooking function for your meals. Just select the recipe on the display and the oven will automatically initiate the best program. You can modify pre-set recipes to create your own by adjusting cooking times, weights and temperature.



MULTI-LEVEL **COOKING MODE**

Internal heat remains constant throughout the oven, while aromas and flavors kept separate thanks to the fan assisted system.

BROIL

The most effective way to brown the exterior of a steak or roast while locking in juices to retain moisture and tenderness

BAKE

Optimal for perfect baking: flavors blend effortlessly with consistent even heat throughout the oven cavity.

PIZZA MODE 590°F

Simultaneously bake two pizzas in only two and half minutes with the maximum temperature of 590°F (310°C).

CUSTOMIZABLE RECIPES

Cooking times and modes have been preprogrammed, but you can modify and customize your recipes to suit every palate and need.



SELF-CLEANING

The pyrolytic Self-Clean function, selected directly from the display, consists of heating the inside of the oven to very high temperatures in order to burn off any excess grease and food residue. At the end of the procedure, just wipe the remaining residue ashes with a cloth without the use of chemical detergents.

CREACTIVE OVENS

CREACTIVE OVEN CHARACTERISTICS







EXTRA LARGE CAVITY

Imagine the efficiency of being able to use multiple levels of a huge oven at once. We consider it an advantage, don't you?

HALOGEN LIGHTS

700 series ovens have 3 lights 20watt halogen bulbs provide plenty of light for easy viewing.

CONCEALED BAKE ELEMENTS

The concealed heating element and large broiler make it possible to cook and save energy at the same time.

PYROLYTIC SELF-CLEAN

Simple, hassle free cleaning. At the end of the self-clean cycle, simply wipe away residue with a damp cloth

SAFETY FEATURE: COOL TOUCH DOOR

Rest assured, your hands are safe with us. Our cool-door technology has a proven guarantee.



TELESCOPIC RACK

Our fully retractable telescopic rack makes accessibility to your cooking more convenient.

convenience.



COOKING



DISTINTO OVEN CREACTIVE

SERIES

A modern workhorse that marries style and innovation. With many preset cooking functions, the 700 series ovens help you prepare your meals with efficiency and ease. Child safety locks and cool touch doors ensure you and your family will be protected from high temperatures while cooking and during the self clean cycle. This series offers a versatile self clean mode, a dual convection system for high quality performance and an oversized oven space for big results. With 5 broil levels and a selection of accessories available to you, the 700 series ovens deliver both luxury and

OVEN 700 SERIES 30"

30" TOUCH CONTROL SINGLE OVEN - STAINLESS STEEL





4

CODE ID

F7SP30S1

OVEN 700 SERIES 30"

30" TOUCH CONTROL DOUBLE OVEN - STAINLESS STEEL



5
5
2

SPECIFICATIONS		OPTIONAL ACCESSORIES	
OVEN	OVEN FUNCTIONS	FMTR630 30"	Telesc. Rack
Creactive Touch Control System Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch	Bake (cooking group) Broil Convection (cooking group) Keep Warm (cooking group) Recipes	TECHNICAL DWG TECHNICAL DATA	
Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack Enameled Broiler Pan	Classic Pizza Function 590°F Preset default temperature Preheat (display instantaneous temperature) Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F		
Lock Keys Door Lock	Setting Weight Kg/lb Event Logs (for Service) Meat Probe Self-Clean		

SPECIFICATIONS

pag

179

194

224

OVENS

Creactive Touch Control System Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack per oven Enameled Broiler Pan Lock Keys Door Lock

OVEN FUNCTIONS Bake (cooking group)

Broil Convection (cooking group) Keep Warm (cooking group) Recipes Classic Pizza Function 590°F Preset default temperature Preheat (display instantaneous temperature) Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service) Meat Probe (only upper oven) Self-Clean

4

F7DP30S1

e	CREACTIVE COOKING SYSTEM
	PIZZA COOKING MODE 590 °F
88	Dual Convection
•••	Self Clean Oven
®	Multi-level cooking
	1 Telescopic Rack per oven
*	Cool Touch Door
00:00	TFT Display
<u></u>	Meat Probe
ŝ	Fast Pre-Heat
K ┤	Interior Lighting

OOKING	
C	

	OPTIONAL ACCESSORIES		pag
	FMTR630	30" Telesc. Rack	179
	TECHNICAL I		194 225
)			
F			


OVEN 700 SERIES 30"

30" TOUCH CONTROL SINGLE OVEN - BLACK GLASS



4

F7SP30B1

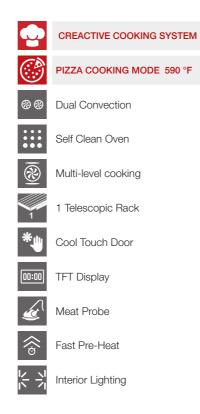

OVEN 700 SERIES 30"

30" TOUCH CONTROL DOUBLE OVEN - BLACK GLASS



SPECIFICATIONS

OVEN	OVEN FUNCTIONS
Creactive Touch Control System	Bake (cooking group)
Dual True Convection	Broil
Self-cleaning oven with Multifunction baking	Convection (cooking group)
Black Porcelain enamel interior	Keep Warm (cooking group)
Cool to the touch	Recipes
Extra-large baking cavity and viewing area	Classic Pizza Function 590°F
3 Halogen lights for flawless visibility	Preset default temperature
Gross capacity 4.4 cu. ft.	Preheat (display instantaneous temperature)
2 chromed racks	Fast Preheat Mode
1 telescopic rack	Sabbath Mode
Enameled Broiler Pan	Setting Temperature °C/°F
Lock Keys	Setting Weight Kg/lb
Door Lock	Event Logs (for Service)
	Meat Probe
	Self-Clean

	OPTIONAL ACCESSORIES		pag	
	FMTR630	30" Telesc. Rack	179	
	TECHNICAL TECHNICAL		194 224	
perature)				

SPECIFICATIONS

OVENS

Creactive Touch Control System Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack per oven Enameled Broiler Pan Lock Keys Door Lock

OVEN FUNCTIONS Bake (cooking group) Broil

Convection (cooking group) Keep Warm (cooking group) Recipes Classic Pizza Function 590°F Preset default temperature Preheat (display instantaneous temperature) Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service) Meat Probe (only upper oven) Self-Clean

4

F7DP30B1

e	CREACTIVE COOKING SYSTEM
	PIZZA COOKING MODE 590 °F
& &	Dual Convection
•••	Self Clean Oven
8	Multi-level cooking
	1 Telescopic Rack per oven
*	Cool Touch Door
00:00	TFT Display
<u>E</u>	Meat Probe
ŝ	Fast Pre-Heat
K 시	Interior Lighting

DKING	
ö	

	OPTIONAL ACCESSORIES		pag
	FMTR630	30" Telesc. Rack	179
)	TECHNICAL TECHNICAL		194 225
°F			

OVEN 700 SERIES 30"

30" TOUCH CONTROL SINGLE OVEN - WHITE GLASS



CODE ID

4

F7SP30W1



OVEN 700 SERIES 30"

30" TOUCH CONTROL DOUBLE OVEN - WHITE GLASS



G
Z
š
ŏ
O

SPECIFICATIONS		OPTIONAL A	CCESSORIES	pag
OVEN	OVEN FUNCTIONS	FMTR630	30" Telesc. Rack	179
Creactive Touch Control System	Bake (cooking group)			
Dual True Convection	Broil	TECHNICAL	DWG	194
Self-cleaning oven with Multifunction baking	Convection (cooking group)	TECHNICAL	DATA	224
Black Porcelain enamel interior	Keep Warm (cooking group)			
Cool to the touch	Recipes			
Extra-large baking cavity and viewing area	Classic Pizza Function 590°F			
3 Halogen lights for flawless visibility	Preset default temperature			
Gross capacity 4.4 cu. ft.	Preheat (display instantaneous temperature)			
2 chromed racks	Fast Preheat Mode			
1 telescopic rack	Sabbath Mode			
Enameled Broiler Pan	Setting Temperature °C/°F			
Lock Keys	Setting Weight Kg/lb			
Door Lock	Event Logs (for Service)			
	Meat Probe			
	Self-Clean			

SPECIFICATIONS

OVENS

Creactive Touch Control System Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks 1 telescopic rack per oven Enameled Broiler Pan Lock Keys Door Lock

OVEN FUNCTIONS

Bake (cooking group) Broil Convection (cooking group) Keep Warm (cooking group) Recipes Classic Pizza Function 590°F Preset default temperature Preheat (display instantaneous temperature) Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service) Meat Probe (only upper oven) Self-Clean

4

F7DP30W1

e	CREACTIVE COOKING SYSTEM
	PIZZA COOKING MODE 590 °F
& &	Dual Convection
••••	Self Clean Oven
®	Multi-level cooking
	1 Telescopic Rack per oven
*	Cool Touch Door
00:00	TFT Display
<u>e</u>	Meat Probe
Ś	Fast Pre-Heat
k K K	Interior Lighting

	OPTIONAL ACCESSORIES		pag
	FMTR630	30" Telesc. Rack	179
	TECHNICAL TECHNICAL		194 225
F			



DISTINTO OVEN 400 SERIES





A sleek European design and flush installation, the 400 series oven shares the same body and soul of the 700 series oven, offering many of the same professional features while providing tremendous value. Available only in a single oven configuration, this series offers an oversized oven capacity, multi pass broil, European convection, concealed bake elements and 8 baking functions; all of which are controlled by an easy to use and extremely reliable control system.

The Athena XS control gives the home chef complete control via easy to use and intuitive controls making this oven a great choice as a primary or secondary oven for a variety of kitchen designs and applications.



OVEN 400 SERIES 30"

OVEN 400 SERIES 30"



SPECIFICATIONS

OVEN

Knob and electronic controls Single fan true convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chromed racks Enameled Broiler Pan

OVEN FUNCTIONS

Convection Bake Convection Broil Convection Roast Bake Broil Thaw (Defrost) Self-Clean

F4SP30S1



True Convection

Self Clean Oven

Multi-level cooking

Cool Touch Door

Interior Lighting

COOKING

OPTIONAL ACCESSORIES		
FMTR630	30" Telesc. Rack	179
TECHNICAL DWG		
TECHNICAL DATA		

DRAWER 700 SERIES 30"

30" WARMING DRAWER STAINLESS STEEL DOOR





4

CODE ID

F7DWD30S1

DRAWER 700 SERIES 30"

30" WARMING DRAWER OVERLAY PANEL







SPECIFICATIONS WARMING DRAWER DRAWER 30" FUNCTIONS Knob Control Pre-heat dishes

Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft. Convection heating system for a more heating distribution All stainless steel structure Warming Temperature range; min. 86 °F up to 190 °F Push-Pull system to open and close door 2 Internal lights Non-slip rubber mat

Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 $^\circ\mathrm{F}$ up to 190 $^\circ\mathrm{F}$

TECHNICAL DWG	194
TECHNICAL DATA	227

pag

SPECIFICATIONS

WARMING DRAWER

DRAWER 30" FUNCTIONS Pre-heat dishes

Defrosting

Knob Control Installation with Overlay Panel Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft. Convection heating system for a more heating distribution All stainless steel structure Warming Temperature range; min. 86 °F up to 190 °F Push-Pull system to open and close door 2 Internal lights Non-slip rubber mat

126 FULGOR MILANO



4

CODE ID

F7IWD3001



Sliding Telescopic Rails

Keep Warm Function



Leavening



Slow Cooking



Thawing



Push Opening

TECHNICAL DWG	

TECHNICAL DATA

Pre-heat coffee cups Keep warm ready food

Leavening dough Slow cooking min. 86 °F up to 190 °F pag

195

227



A standard-setting series with first-class performance. Many preset cooking functions help you prepare your meals with efficiency and ease. The fastest and most versatile self-clean mode available, featuring an automatic door-latch system. Child safety locks and cool-touch doors protect you and your family from high temperatures while cooking and during the self-clean cycle. Compact oven cavity dimensions fit in any kitchen and reduce energy consumption while providing ample space for all your cooking needs. A selection of accessories is available for your convenience.

0

FULGOR

COOKING

OVEN 100 SERIES 30"

30" MULTIFUNCTION SELF-CLEAN OVEN



CODE ID

4

F1SP30S1



OVEN 100 SERIES 24"

24" MULTIFUNCTION SELF-CLEAN OVEN



ļ

SPECIFICATIONS		OPTIONAL ACCESSORIES		pag	
OVEN	OVEN FUNCTIONS	FMTR 130	Telescopic rack	179	
Knob and electronic controls	Convection Bake				
True Convection	Convection Broil	TECHNICAL D	WG	195	
Self-cleaning oven with Multifunction baking	Convection Roast	TECHNICAL D	ATA	228	
Black Porcelain enamel interior	Bake				
2 Halogen lights	Broil				
Gross capacity 3.0 cu. ft.	Thaw (Defrost)				
2 chromed racks	Self-Clean				
Enameled Broiler Pan (basin + anti splash)					

SPECIFICATIONS

OVEN
Knob and electronic controls
True Convection
Self-cleaning oven with Multifunction baking
Black Porcelain enamel interior
1 Halogen light
Gross capacity 2.6 cu. ft.
2 chromed racks
Enameled Broiler Pan (basin + anti splash)

OVEN FUNCTIONS

Convection Bake Convection Broil Convection Roast Bake Broil Thaw (Defrost) Self-Clean

CODE ID

F1SP24S2



True Convection

Self Clean Oven

Multi-level cooking



Cool Touch Door

· 낮 ↓ Interior Lighting

OPTIONAL ACCESSORIES		pag
FMTELG	Telescopic guides	179
TECHNICAL DWG TECHNICAL DATA		195 228

OVEN 100 SERIES 30"

30" MULTIFUNCTION EASY-CLEAN OVEN



CODE ID

F1SM30S1



OVEN 100 SERIES 24"

24" MULTIFUNCTION EASY-CLEAN OVEN



SPECIFICATIONS **OPTIONAL ACCESSORIES** pag OVEN **OVEN FUNCTIONS** FMTR 130 189 Telescopic rack Knob and electronic controls Convection Broil Convection Roast TECHNICAL DWG 195 Black Porcelain enamel interior 2 Halogen lights Bake **TECHNICAL DATA** 229 Gross capacity 3.0 cu. ft. Broil 2 chromed racks Pizza (Lower Conv. Bake) Enameled Grill basin Lower Bake Thaw (Defrost)

SPECIFICATIONS

OVEN

Knob and electronic controls True Convection Black Porcelain enamel interior 1 Halogen light Gross capacity 2.6 cu. ft. 2 chromed racks Enameled Broiler Pan (basin + anti splash)

OVEN FUNCTIONS

Convection Bake Convection Broil Convection Roast Bake Broil Lower Conv. Bake

F1SM24S2



₩ш

True Convection

Multi-level cooking

Cool Touch Door

· 나 나 Interior Lighting

OPTIONAL ACCESSORIES		pag
FMTELG	Telescopic guides	179
TECHNICAL DWG		195
TECHNICAL DATA		229

FULGOR MILANO

DISTINTO COCKTOPS 400 SERIES

The 400 series "Largo" cooktops utilize the most advanced technology available and combine this with a classic Italian design, resulting in a cooktop that not only performs magnificently but also looks spectacular. A design that lends itself to countless application possibilities, the 400 series cooktops also take cooking and maintenance needs into consideration. All grates are separated in sizes that make them easy to handle and remove for cleaning. The burners are well oriented for ease of use, with unique configurations like a wok burner and fifth burner on a 30" unit, making this cook top one of the most versatile in the category. Explore the Largo cooktop family and enjoy the possibilities; buon appetito!

COOKING



DISTINTO GAS COOKTOPS 400 SERIES





CONTINUOUS GRATE SURFACE

Move from one burner to the next with ease and safety.



DUAL BURNER

Fulgor-Milano uses a dual-flame European-style sealed burner to deliver a wide range of heat.

SPACE FOR WOK

Our unique configurations allow you to have all the space needed for large pans or even a wok.

EUROPEAN SEALED BURNERS

Designed with only two removable parts, our sealed burners keep spills from leaking inside the cooktop. High quality aluminum.



44" GAS COOKTOP



CODE ID F4GK42S1

ð



COOKTOP 400 SERIES 36"

36" GAS COOKTOP



SPECIFICATIONS	OPTIONAL ACCESSORIES		pag
GAS COOKTOP	FMWOK	Wok ring	178
4 gas burners with 1 Dual Flame burner	FMSIM	Simmer plate	178
Electronic Ignition and Re-ignition	FMSPR	Small Pot Adapter	178
Flame-out Sensing Heavy duty cast iron grates	TECHNICAL	DWG	196
Heavy duty cast from grates	TEOHNICAL	Diva	190
	TECHNICAL	. DATA	230

SPECIFICATIONS

GAS COOKTOP

5 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing Heavy duty cast iron grates



F4GK36S1



 $\overline{\Lambda}$

Heavy Duty Grates



Dual Burner

Stainless Steel

pag FMWOK Wok ring 178 FMSIM Simmer plate 178 FMSPR Small Pot Adapter 178 **TECHNICAL DWG** 196 **TECHNICAL DATA** 230

OPTIONAL ACCESSORIES

COOKTOP 400 SERIES 30"

30" GAS COOKTOP



ð CODE ID

F4GK30S1



COOKTOP 400 SERIES 24"

24" GAS COOKTOP



SPECIFICATIONS OPTIONAL ACCESSORIES		ACCESSORIES	pag
GAS COOKTOP	FMWOK	Wok Ring	178
5 gas burners with 1 Dual Flame burner Electric Re-ignition system	FMSIM FMSPR	Simmer Plate Small Pot Adapter	178 178
Flame-out Sensing Heavy duty cast iron grates	TECHNICAL	DWG	197
	TECHNICAL	DATA	231

SPECIFICATIONS

GAS COOKTOP

4 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing Heavy duty cast iron grates



CODE ID

F4GK24S1



Heavy Duty Grates

Continuous Grate Surface





Dual Burner

Stainless Steel

pag FMWOK Wok Ring 178 FMSIM Simmer Plate 178 FMSPR Small Pot Adapter 178 **TECHNICAL DWG** 197 **TECHNICAL DATA** 231

OPTIONAL ACCESSORIES

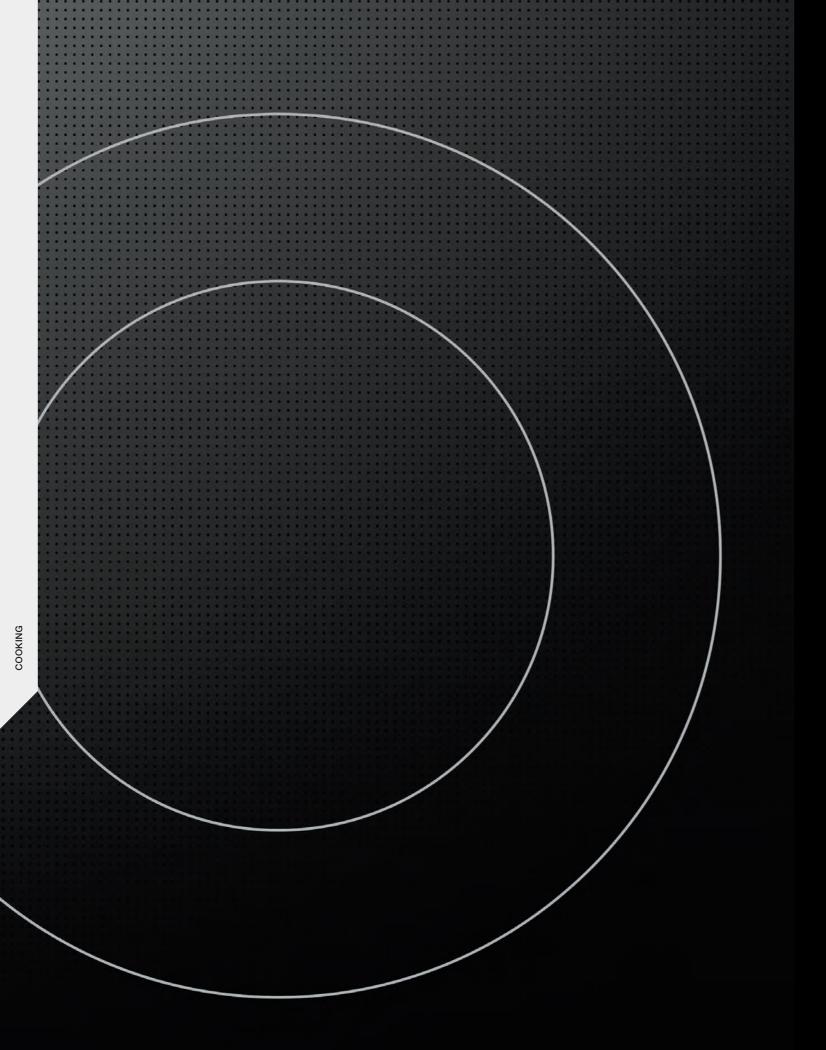

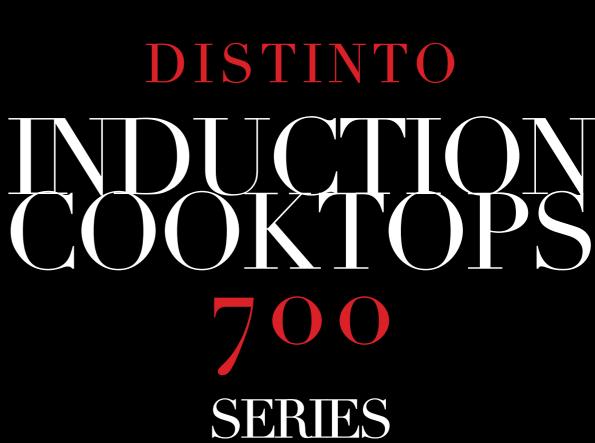

Our 700 series induction cooktops follow the same design criteria of all our Fulgor-Milano products; style, function, and performance are at the heart of this product. Like our radiant touch cooktops, the induction units are finished with a subtle yet elegant aluminum trim that exudes luxury while offering all of the features you expect from a premium cooking appliance. Our induction cooktops offer the power and control of a gas cooktop with the cleanability of a radiant cooktop, giving you the best of both worlds. From tempering fine chocolate, braising a classic Ossobuco, or bringing a 15 quart stock pot to boil in minutes, the possibilities are endless with our induction technology.



DISTINTO **INDUCTION COOKTOPS** 700 SERIES





EXTRA LARGE ZONE AND BRIDGE ELEMENT

Maximum flexibility in how you use the cooktop.

SLIDE TOUCH CONTROLS

Each cooking zone has its own slide touch control for precise selection of power.

INDUCTION

The pan creating its own heat means cooking safely without compromise. Since there is no heat transfer from a conventional burner through the glass, induction cooking surfaces use the exact amount of energy needed - no more, no less!

FRAME

Aluminum frame stainless steel color: Sophisticated and functional! Adds a touch of elegance while protecting the glass edge.

COOKING

LOW TEMPERATURE FUNCTION

Low enough to temper chocolate or hold delicate sauces without using a double boiler.

INDUCTION COOKTOPS 700 SERIES 36"


36" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM

XXXX CODE ID

F7IT36S1

INDUCTION COOKTOPS 700 SERIES 30"

30" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM

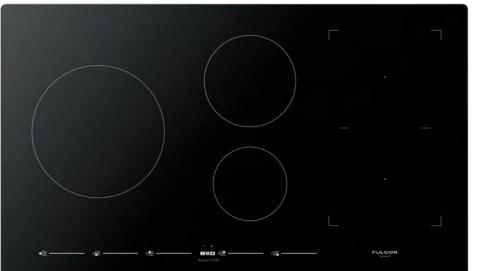





SPECIFICATIONS		OPTIONAL ACCESSORIES		pag
INDUCTION COOKTOP		INDUKIT4	Pot Induction Adapter	180
5 Induction cooking zones	Pot Detection System			
11" large cooking zone	Child Lock Function	TECHNICA	L DWG	198
Bridge zone on the right side	Independent timer for each zone	TECHNICA	L DATA	232
Elegant Ceramic glass surface	Pause Function			
Premium induction technology	Booster function for each cooking zone			
for unsurpassed performance	Failure Codes Indication			
Melt and Simmering Functions	Digital Display for Power Level			
Residual heat and Power on Indicators	Automatic Heat-up Time			
Digital Minute Minder				

SPECIFICATIONS

INDUCTION COOKTOP

4 Induction cooking zones 11" cooking zone Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Melt and Simmering Functions Residual heat and Power on Indicators Digital Minute Minder

Pot Detection System Child Lock Function Independent timer for each zone. Pause Function Booster function for each cooking zone Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time

CODE ID

F7IT30S1



Easy Clean Ceramic Glass

Slide Touch Control

Pan Detection system

Residual Heat Sensor




Frame Creactive

Digital Minute Minder


₫	
₹	
ō	
ŏ	


 OPTIONAL	OPTIONAL ACCESSORIES	
INDUKIT4	Pot Induction Adapter	180
TECHNICA TECHNICA		198 233



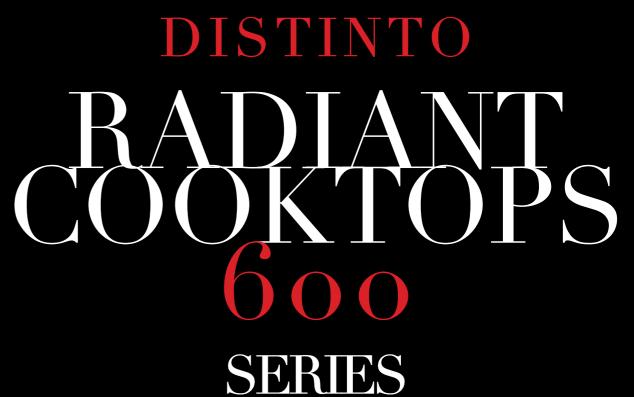

Beautiful intuitive controls designed with elegance and precision. Radiant touch cooktops deliver quick and reliable performance with maximum flexibility. Touch controls with patented Peacock control sliding bar for power-level selection and fast boil with automatic power reduction.

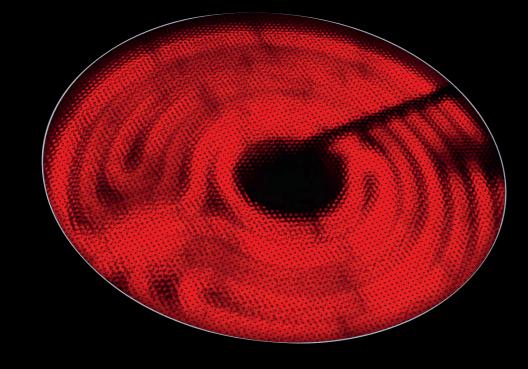

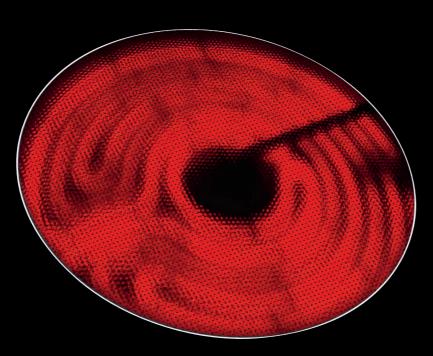

DISTINTO RADIANT COOKTOPS 600 SERIES





ELECTRONIC CONTROL

Fine-tuning of lower temperatures plus timer function is standard with our slide touch control bar and "Peacock" power display.

FRAME

Polished aluminum frame: Sophisticated and functional!

RADIANT COOKTOP 600 SERIES 36"

36" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM

4 CODE ID

F6RT36S2

RADIANT COOKTOP 600 SERIES 30"

30" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM





SPECIFICATIONS		pag
RADIANT COOKTOP	TECHNICAL DWG	199
Digital Display for Power Level Low Power Scale for Delicate Cooking Control Display Lock Automatic Fast Boil Function	TECHNICAL DATA	234
Power and Hot surface Indication Timer Functions Timer Display		
Acoustic Buzzer Independent timer for each zone Booster function for each cooking zone Failure Codes Indication		

SPECIFICATIONS

RADIANT COOKTOP

Digital Display for Power Level Low Power Scale for Delicate Cooking Control Display Lock Automatic Fast Boil Function Power and Hot surface Indication Timer Functions Timer Display Acoustic Buzzer Independent timer for each zone. Booster function for each cooking zone Failure Codes Indication

4

CODE ID

F6RT30S2



 \bigcirc

Easy Clean Ceramic Glass

Peacock Touch Control


Double Radiant



Triple Radiant



Timer



Frame Creactive

OOKING	
ö	

pag **TECHNICAL DWG** 199 **TECHNICAL DATA** 235

value and performance to the consumer. The manual controls are reliable and accurate and continue to be the most user friendly of all control systems available today. Even the most discerning cooks will be impressed with the functionality and performance of this mainstay. Like all Fulgor-Milano cooktops the 300 series offers a shallow profile for countless installation options.

RADIANT COOKTOPS 300 SERIES 24"

24" RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM



SPECIFICATIONS

RADIANT COOKTOP

Power on Indication Hot surface Indication

154 FULGOR MILANO



CODE ID

F3RK24S2



Easy Clean Ceramic Glass



Double Radiant



Frame Creactive

Residual Heat Sensor



TECHNICAL DWG	199
TECHNICAL DATA	236



DIST

As important as it is to have a cooking product give you the performance to create all of your cooking masterpieces, effective ventilation is essential to remove cooking odors and excessive heat from the kitchen. To compliment our line of cooking products we offer a complete range of ventilation products which are also hand crafted in Italy and meet all of the criteria one would expect. Quality, performance, fit and finish, are all embodied in our ventilation products. Let us help you find the best solution to meet your individual performance requirements and design needs.



DISTINTO HOODDS 600-400 SERIES





BAFFLE FILTER

Stainless steel and dishwasher safe, our baffle filters allow for perfect filtering of cooking vapors and grease while still offering efficient suction.

LED

For perfect illumination of your cooking surface.



PERFECT QUALITY

Smooth weld finished corner surface.

34" INSERT HOOD



JL CFM max 600 7<u>1</u>~ LED Lighting H Noise Level 69 (dB) Ceiling installation

4

CODE ID

F6BP34S1

28" INSERT HOOD



SPECIFICATIONS	OPTIONAL ACCE	SSORIES	pag
INSERT HOOD	FMFIL	Charcoal Filters	180
600 CFM 69 dB sound rating		-	200
Pro Baffle Filters LED Lighting	TECHNICAL DAT	A	237

SPECIFICATIONS

INSERT HOOD

600 CFM 69 dB sound rating Baffle Filters LED Lighting

F4BP28S1



CFM max 600




亖

Noise Level 69 (dB)

Ceiling installation





36" UNDERCABINET HOOD



HOOD 400 SERIES 30"
 30" UNDERCABINET HOOD
FULCOR

SPECIFICATIONS	OPTIONAL	ACCESSORIES	pag
INSERT HOOD	FMFIL	Charcoal filters	180
450 CFM 69 dB sound rating	TECHNICA		200
Baffle Filters LED Lighting	TECHNICA	L DATA	237

4

CODE ID

F4UC36S1

SPECIFICATIONS

INSERT HOOD

450 CFM 69 dB sound rating Baffle Filters LED Lighting

CODE ID

F4UC30S1



ղր





Ļ

LED Lighting

Noise Level 69 (dB)

Wall hung installation

OPTIONAL ACCESSORIES		pag
FMFIL	Charcoal filters	180
TECHNICAL DWG		200
TECHNICAL DATA		237



DISTINTO FRIDGE WUNE

COLD TEMP. UNDER CONTROL.

The fridge was developed to be optimized for complete integration and designed to offer maximum storage capacity. The dual-movement hinges ensure that all the fridge drawers extend fully when open. The interior is a brilliant white, for striking effect. Fulgor Milano Wine Cellars store wine under ideal conditions, designed to eliminate the four enemies of wine: heat, humidity, light, and vibration. With all of the functional and aesthetic features of our refrigerators, significant attention was paid to the added features of customized humidity and temperature control, ensuring the optimal environment for aging your wine collection.

FRIDGE



FRIDGE

DISTINTO FRIDGE WINE



DUOPRO

Dual variable speed compressors and two dedicated evaporators ensure smooth, quite, energy efficient operation.

0

SOFT-CLOSING SYSTEM

State-of-the-art mechanisms ensure the slow and silent closing of drawers and doors every time.







INTERIOR CONVENIENCE

Brilliant white aluminum interior walls combine with a powerful LED lighting system to create a striking effect and a bright interior. With a state of the art adjustable glass shelving system and door bins, convenience is key while the advanced refrigeration system keeps your food fresher longer.

OPTIVISION

The Optivision lighting system uses modern LED technology to ensure an optimal view of the interior. Ten LED arrays light the refrigerator compartment from above, while 7 individual spot lights illuminate distinct areas of the fridge and fresh food compartments and Flexzone drawer.

CUSTOM SIZED ICE

With the Ice Maker menu you can choose the size of the ice cubes produced automatically between large and medium.


WINE CELLAR

The electronic control enables the preferred humidity level to be chosen, between high, medium and low, ensuring the correct preservation of corks, a fundamental element for the storage of fine wine. Not just tasting temperature: the Cave storage compartment can also be used to store red wines to be aged over a long period thanks to the accurate temperature and humidity control.



BUILT-IN WINE CELLAR 24"

24" PROFESSIONAL BUILT-IN WINE CELLAR

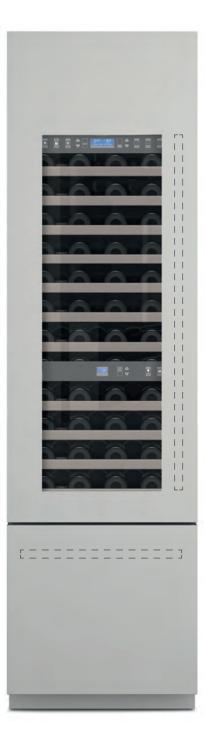

SPECIFICATIONS

Cave Storage Compartment, Natural Wood Shelves, for 36 bottles Wine Celler Compartment, Natural Wood Shelves, for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting Brilliant white aluminium interior Flexzone Bottom Drawer Overlay Panel

 		pag
REFSBSINT60	Coupling kit	181
TECHNICAL DWG TECHNICAL DATA		201 239
NOTE:		

4

CODE ID

CODE ID

R

7**!**\

A?

F7IBW24O1-R (RIGHT DOOR)

F7IBW24O1-L (LEFT DOOR)

RIGHT DOOR

LEFT DOOR

Deep-freezing

Hot air ventilation

LED lighting

Rapid Deep Freezing

Noise Level 41 (dB)

Integrated Installation

Holiday Mode

Triple Panel Door

54 Bottles Capacity

Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer

BUILT-IN FRIDGE 36"

36" PROFESSIONAL BUILT-IN FRIDGE



SPECIFICATIONS

FRIDGE

Fridge Compartment Flexzone Bottom Drawer Total No Frost Stainless Steel Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior Overlay Panel



CODE ID

F7IBM36O1-R (RIGHT DOOR) code id F7IBM36O1-L (LEFT DOOR)



RIGHT DOOR

LEFT DOOR



Cool Zone 0°C



Hot air ventilation



æ*

*

 \mathfrak{R}

Total No Frost

Rapid Deep Freezing

LED lighting

Noise Level 41 (dB)

Integrated Installation

Holiday Mode

Ice Maker

		pag
REFSBSINT60	Coupling kit	181
TECHNICAL DWG		201
TECHNICAL DATA		238

NOTE:

Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer





DISTINTO DISHWASHERS 000 SERIES

We love preparing meals for family and friends, but with that comes the clean up. To make life easier, Fulgor Milano offers three distinct styles of dishwashers maintaining the design integrity of your kitchen. Choose between Professional, Distinto, or Integrated which will accept a custom panel to match your cabinets. Our Italian built dishwashers offer all of the features that have become the standard in premium dishwashers models on the market today. Quiet performance, stainless interior, flow-through heater, adjustable upper racks and amazing washing results are just some of the features you can expect from our dishwashers.

DISTINTO DISHWASHERS **SERIES**

AQUASTOP

Have peace of mind with the Aquastop feature that detects and prevents water leaks.





UPPER BASKET

Designed for better accommodation of different sizes of cups and glasses.

LOWER BASKET

Robust and roomy, the lower basket can accommodate large pots.

MICRO FILTER

With three levels of filtering, our micro filter gives you the best cleaning performance.

WATER SOFTENER

For flawless cleaning even with hard water.

CUSTOMIZABLE

Offers flexibility while arranging dishes for wash.



ADJUSTABILITY

The height-adjustable upper rack easily accommodates a variety of glassware sizes and makes room for larger items below.

DISHWASHER 600 SERIES 24"

24" INTEGRATED DISHWASHER WITH STAINLESS STEEL EXTERIOR





4

CODE ID

F6DW24SS1

DISHWASHER 600 SERIES 24"

24" FULLY INTEGRATED DISHWASHER



		pag
INTEGRATED DISHWASHER	TECHNICAL DWG	202
Quiet plus – 49dB	TECHNICAL DATA	240
Stainless steel interior tub		
10 wash cycles		
Fast wash cycles		
Adjustable height upper rack		
13 place settings		
Concealed heating element		
Extreme wash (sanitization)		

SPECIFICATIONS

INTEGRATED DISHWASHER

Quiet plus – 49dB Stainless steel interior tub 10 wash cycles Fast wash cycles Adjustable height upper rack 13 place settings Concealed heating element Extreme wash (sanitization) Custom overlay panel-ready

SPECIFICATIONS

CODE ID

F6DW24FI1



Noise Level 49 (dB)

Steel Tub



 \mathbb{D}

0-24h

Fast Wash Cycle

China and Crystal Cycle

1/2 Load Cycle

Delayed Start

	pag
TECHNICAL DWG	202
TECHNICAL DATA	241





Small pot reduction

inches on a stable, flat cooking surface

DISTINTO OVEN




Uniquely creactiveed accessory allows you to use pans smaller than 4



Wok ring

CODE FMWOK

For best results with a wok, use this accessory with the high-BTU burner specifically creactiveed for wok cooking.

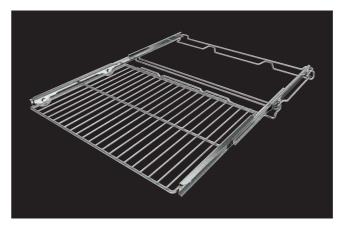

30" Telescopic Oven Rack

CODE FMTR630



Simmer plate

CODE FMSIM

CODE FMSPR


The cast-iron simmer plate provides a steady simmer temperature, evenly distributed across a stable heating surface.



24" Telescopic guides

CODE FMTELG

178 FULGOR MILANO

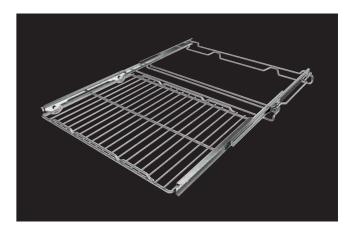

30" Telescopic Oven Rack

CODE FMTR130

DISTINTO INDUCTION



Trilaminate magnetic plates for non induction pots CODE INDUKIT4



36" Built-In Fridge and 24" Built-In Wine Cellar Installation Kit.

Note: Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer.

DISTINTO HOOD


OPTIONAL ACCESSORIES



CODE FMFIL

Charcoal filters (for recirculating installations)

CODE REFSBSINT60

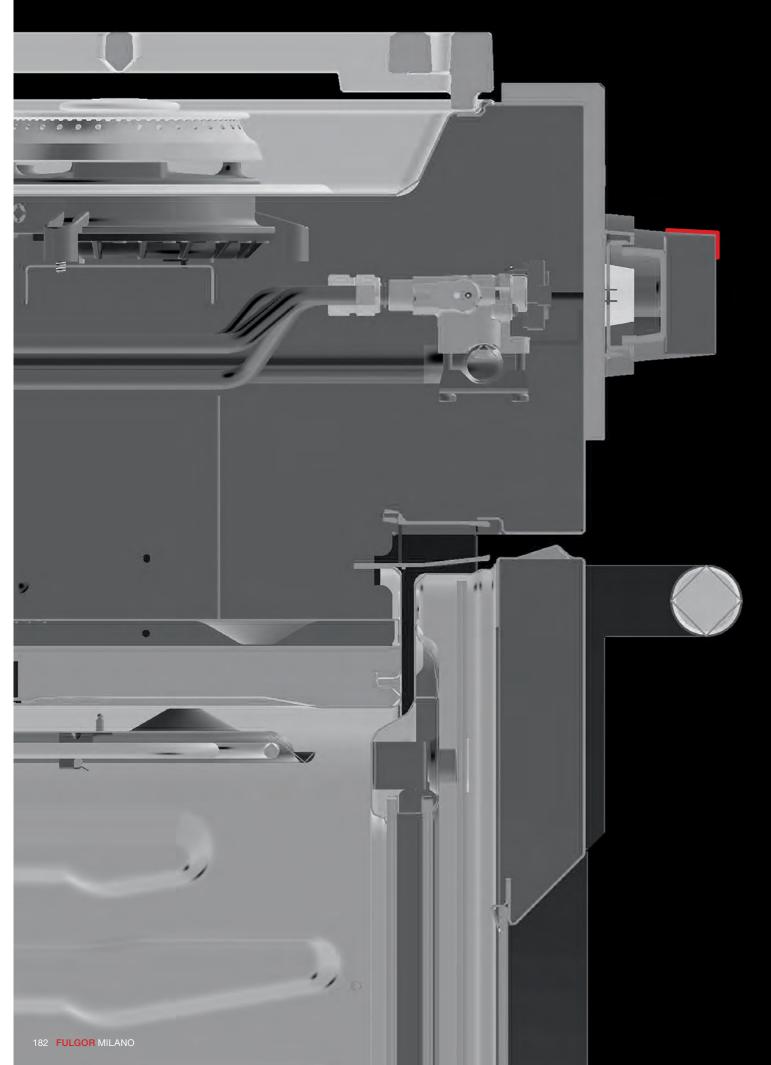


TECHNICAL DISTINTO





SOFIA PROFESSIONAL RANGE


TECHNICAL DIMENSION


SOFIA PROFESSIONAL RANGE

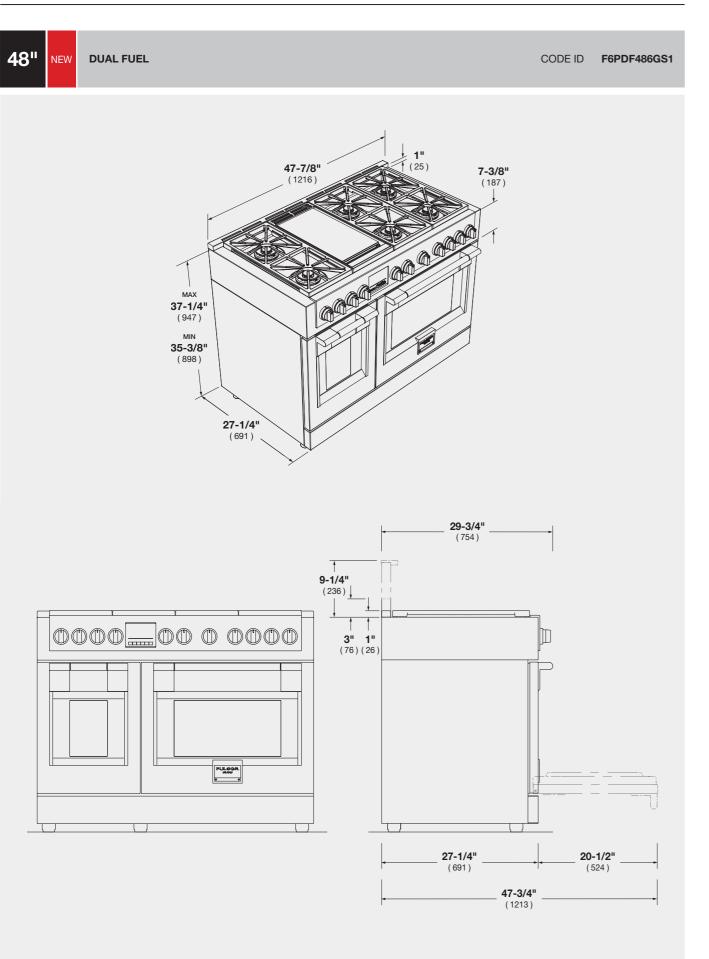

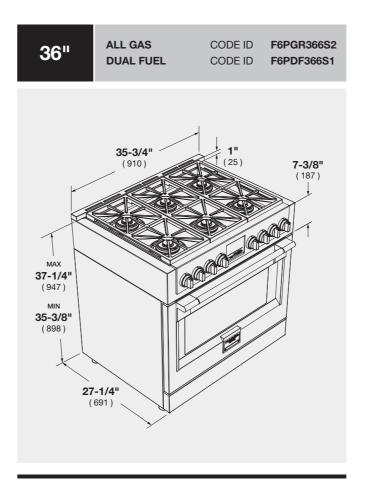

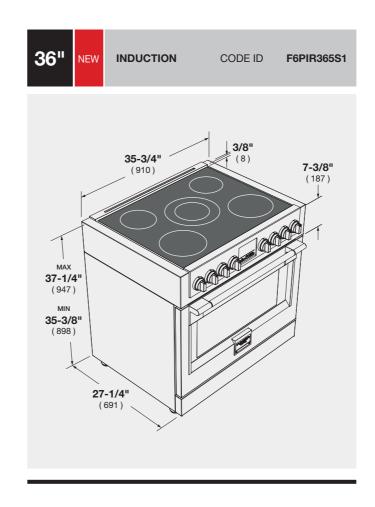

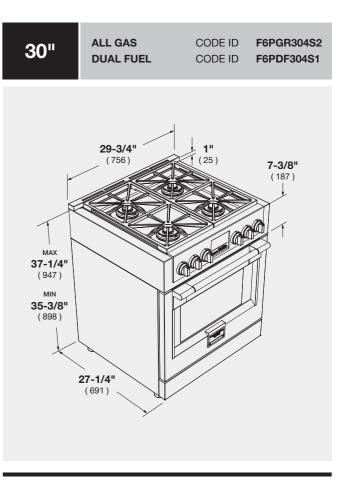


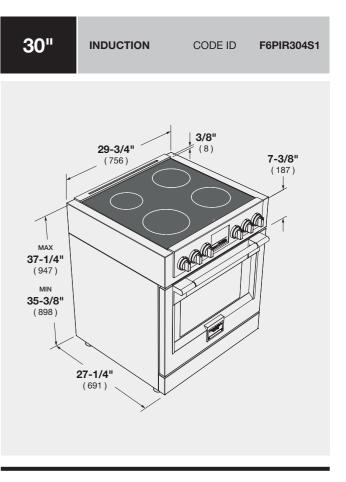



SOFIA PROFESSIONAL TOP RANGE


TECHNICAL DIMENSION

SOFIA PROFESSIONAL GAS COOK TOP

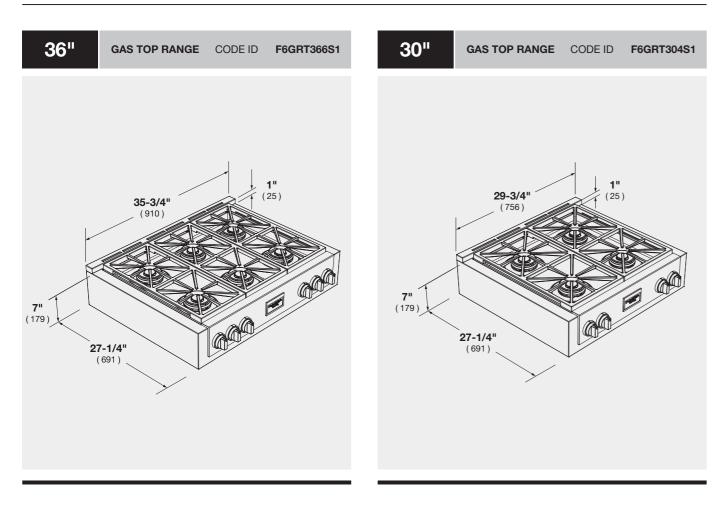

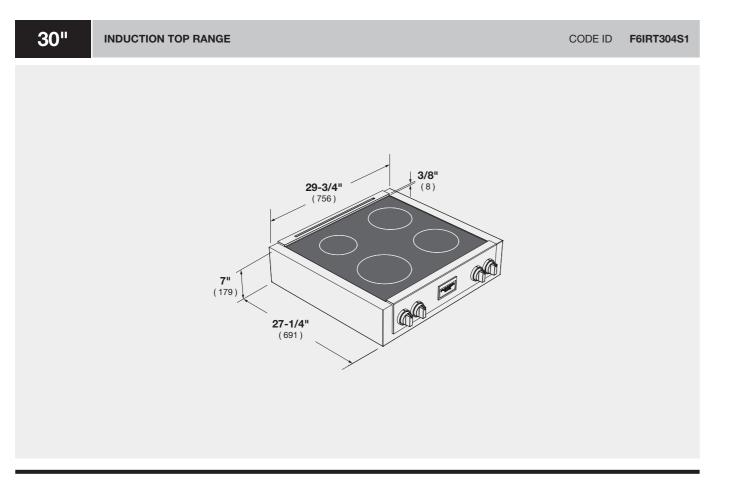

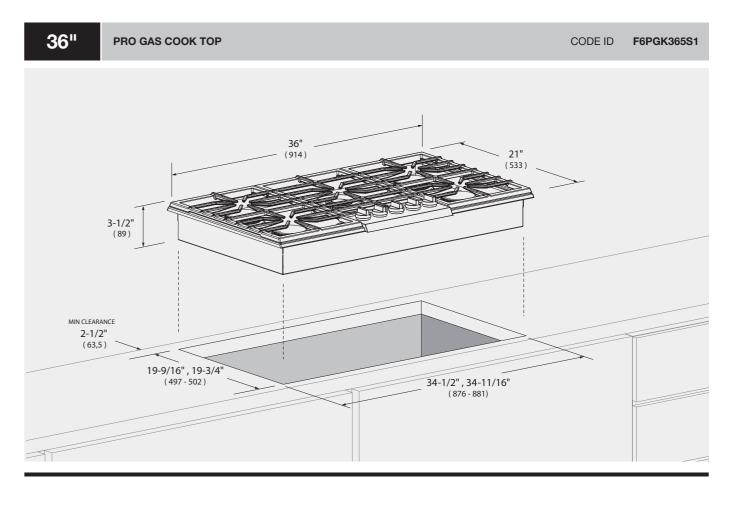


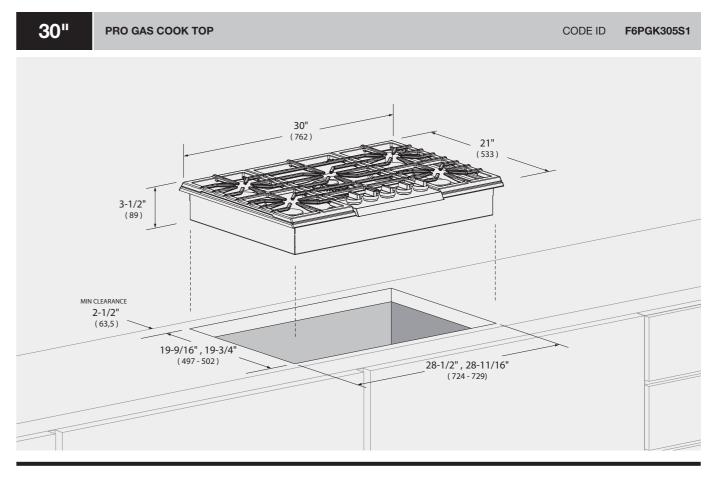



SOFIA PROFESSIONAL OVEN / WARMING DRAWER


TECHNICAL DIMENSION


SOFIA PROFESSIONAL DISHWASHER / HOOD

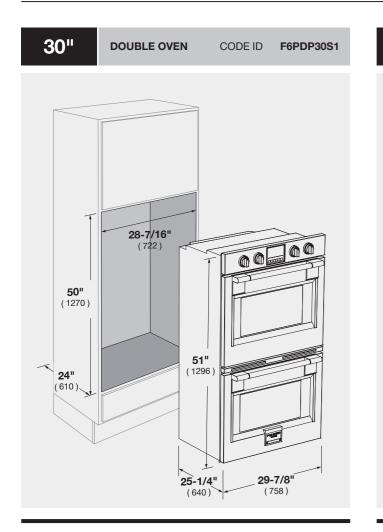

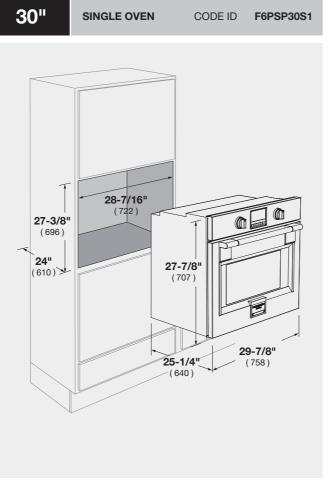

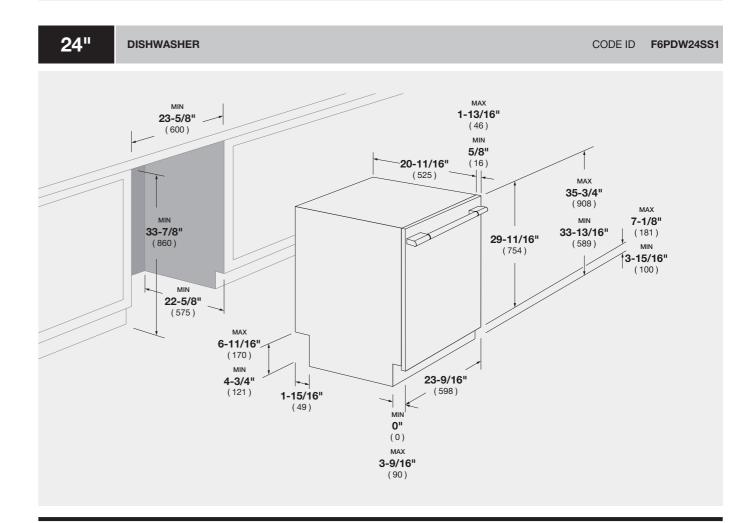

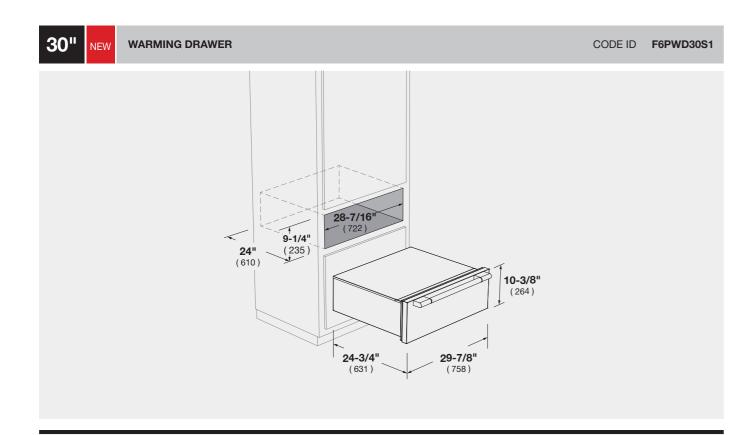

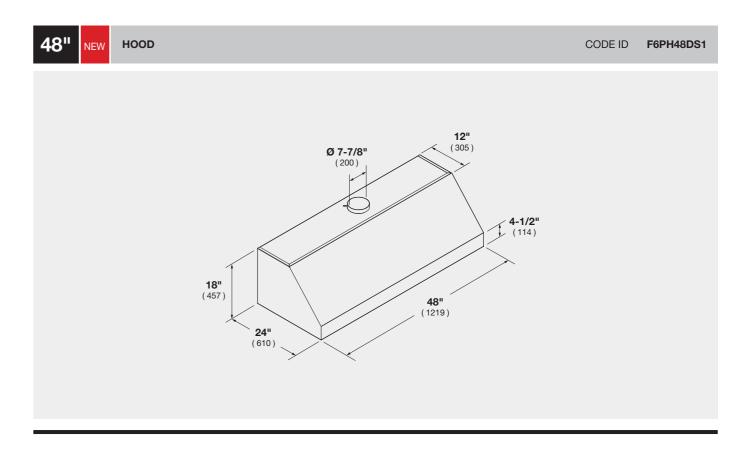



DWG TECHNICAL


SOFIA PROFESSIONAL HOOD


TECHNICAL DIMENSION

SOFIA PROFESSIONAL HOOD

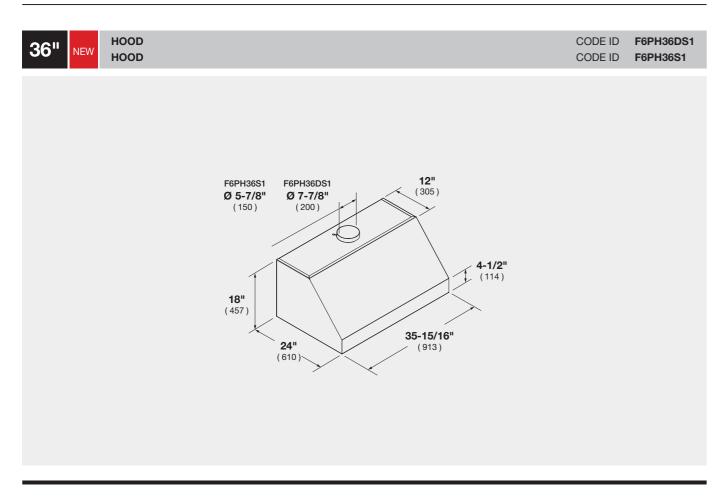

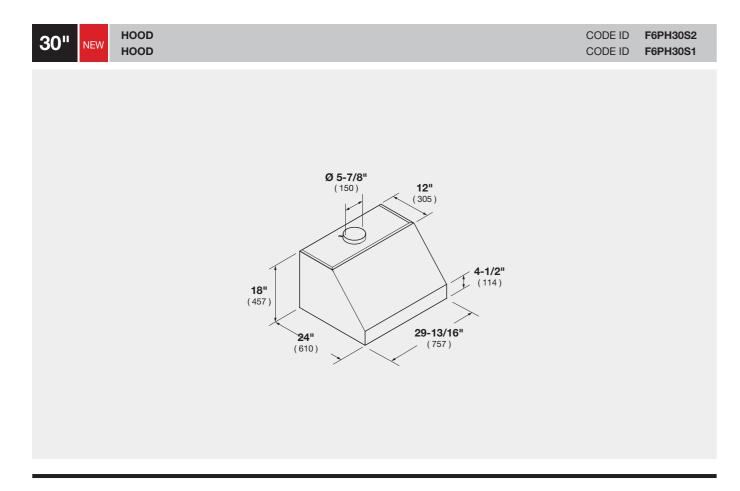

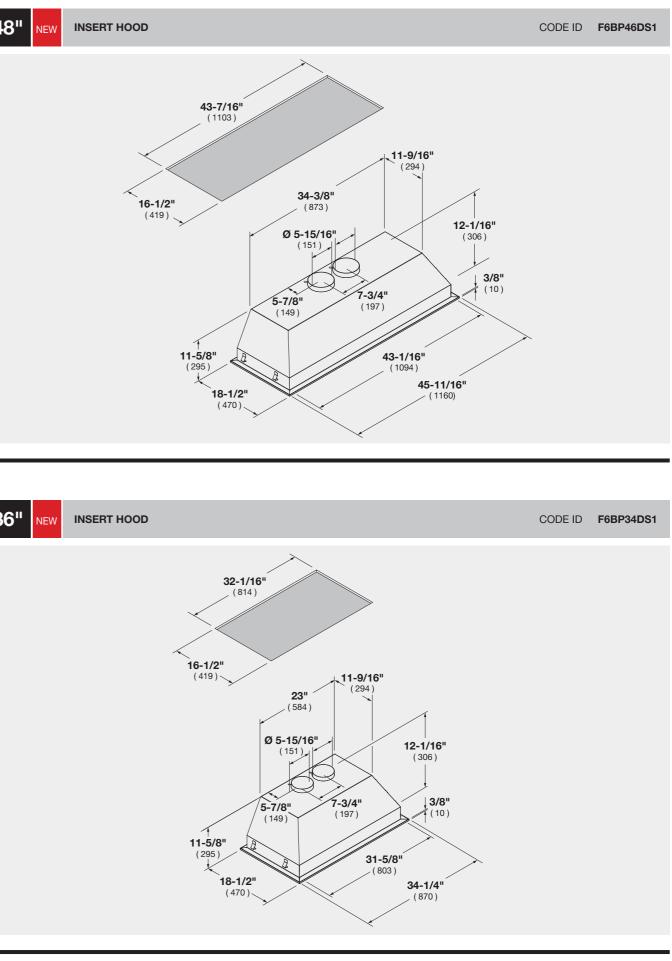

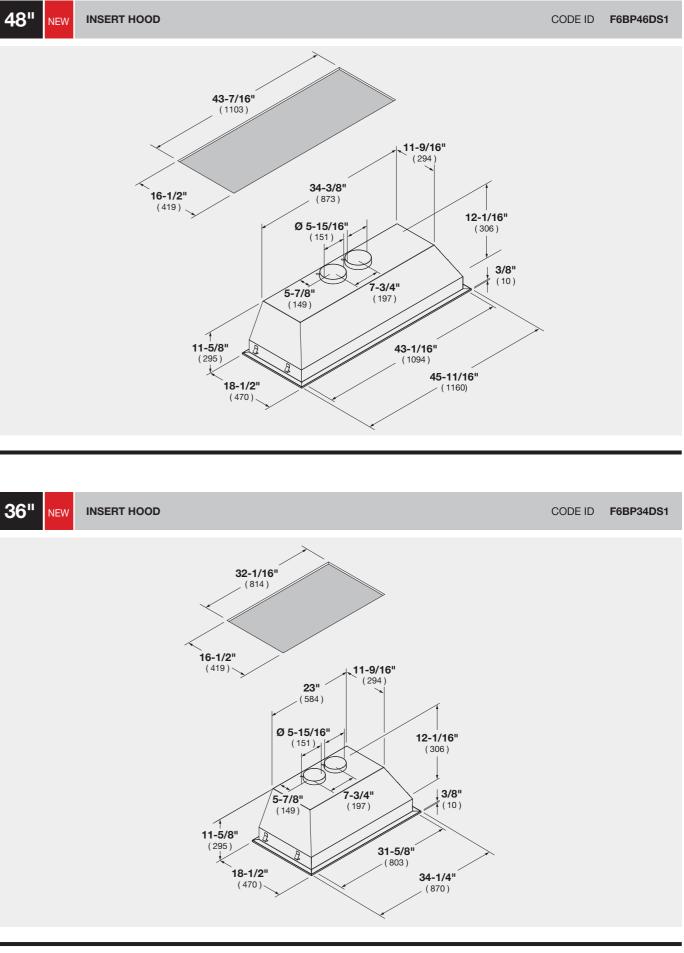


DWG


TECHNICAL


PROFESSIONAL CONSERVATION


TECHNICAL DIMENSION



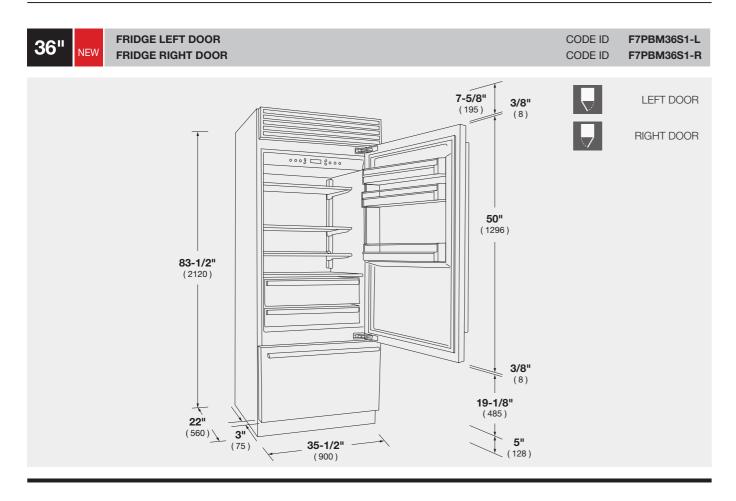


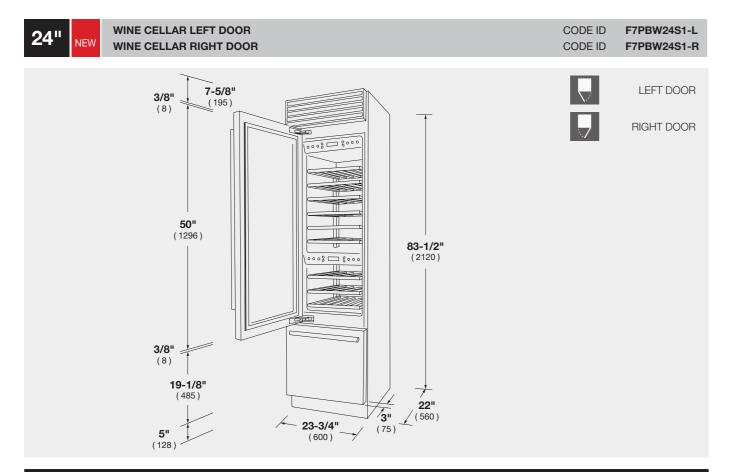


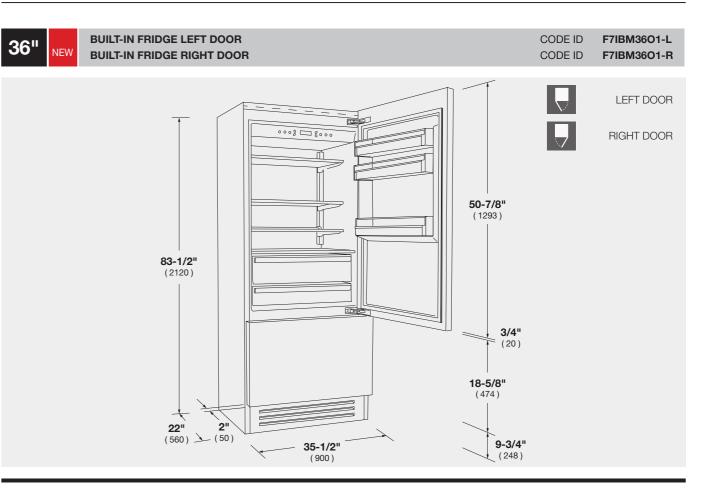

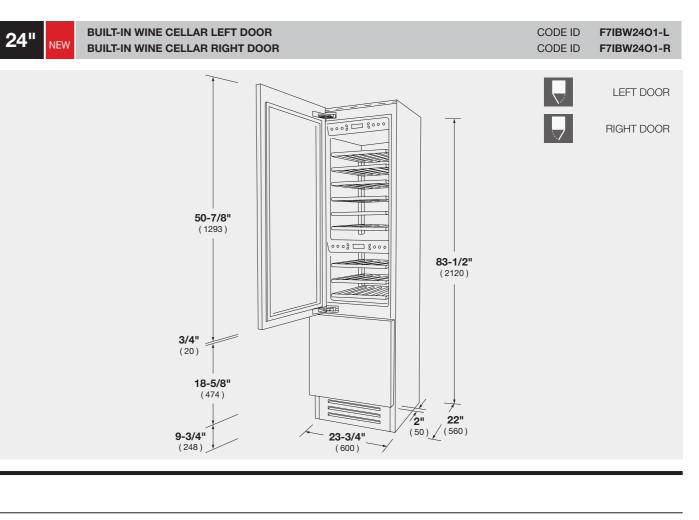

DISTINTO OVEN

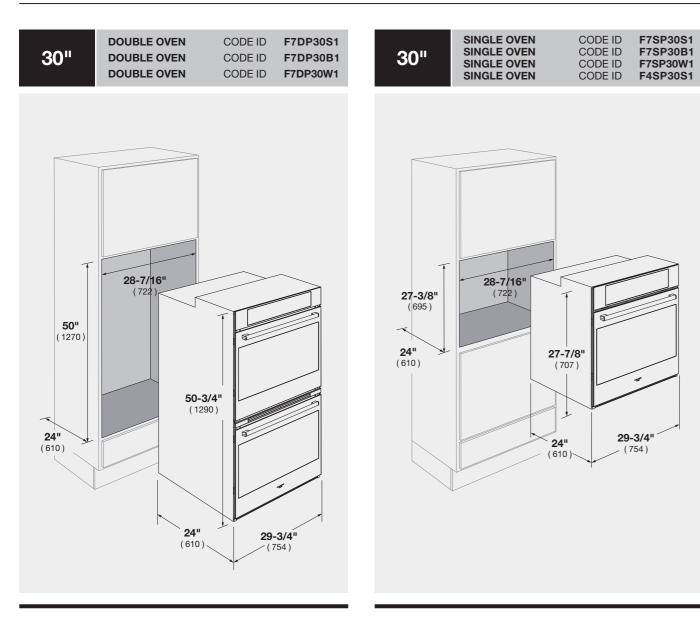


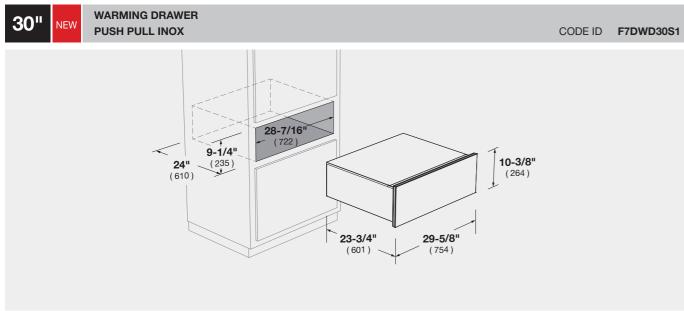

28" (710) **25"** (585) **24"** (610) **23-1/4**" (589) 29-3/8" 22-1/16" (745) (560) WARMING DRAWER 30" PUSH PULL OVERLAY PANEL

SINGLE OVEN HIGH 24" CODE ID F1SP30S1

SINGLE OVEN HIGH 24" CODE ID F1SM30S1

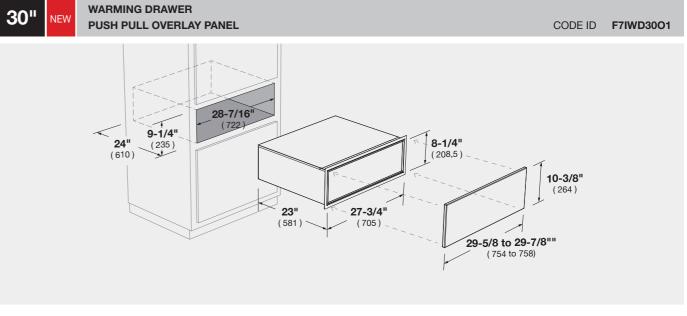


DWG

TECHNICAL

TECHNICAL DIMENSION

DISTINTO OVEN

30"

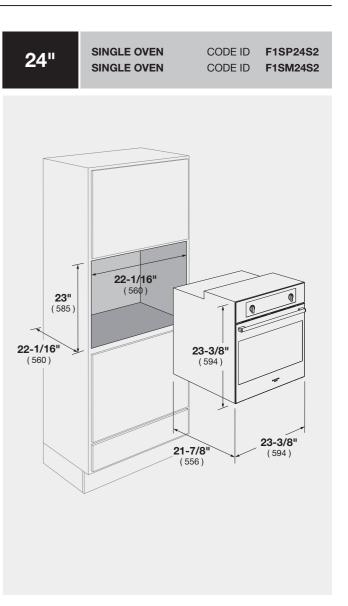



DWG TECHNICAL


DISTINTO COOKTOP GAS


TECHNICAL DIMENSION

DISTINTO COOKTOP GAS

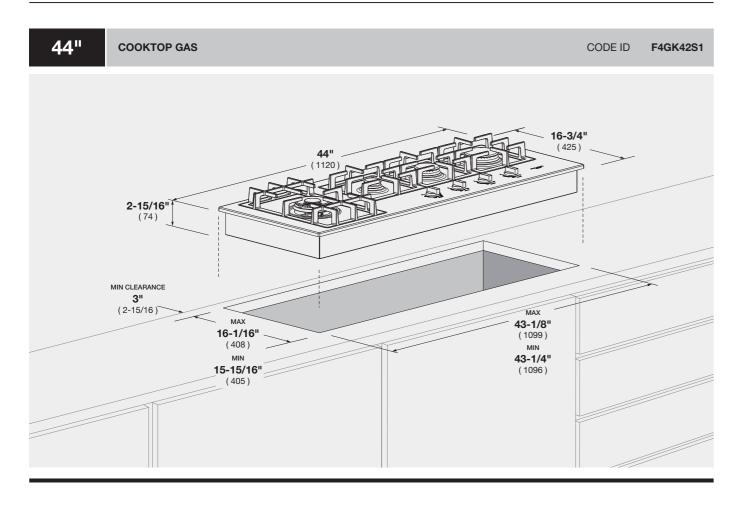

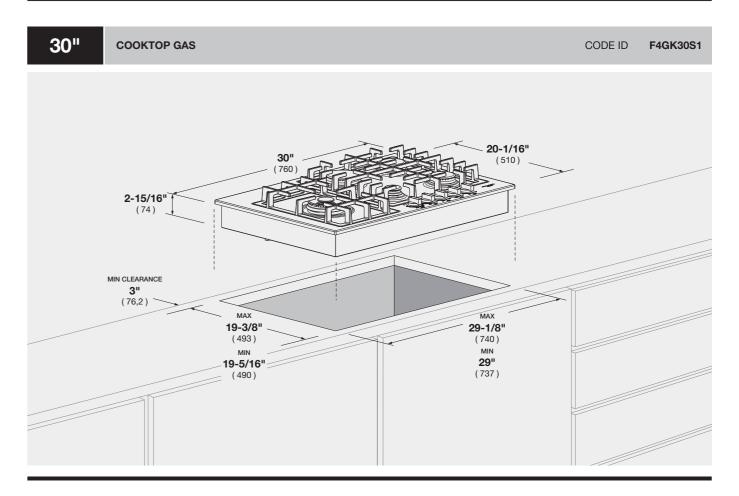

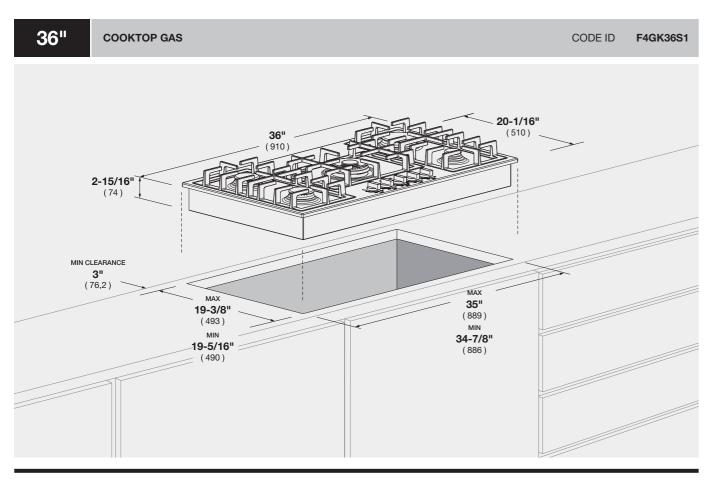


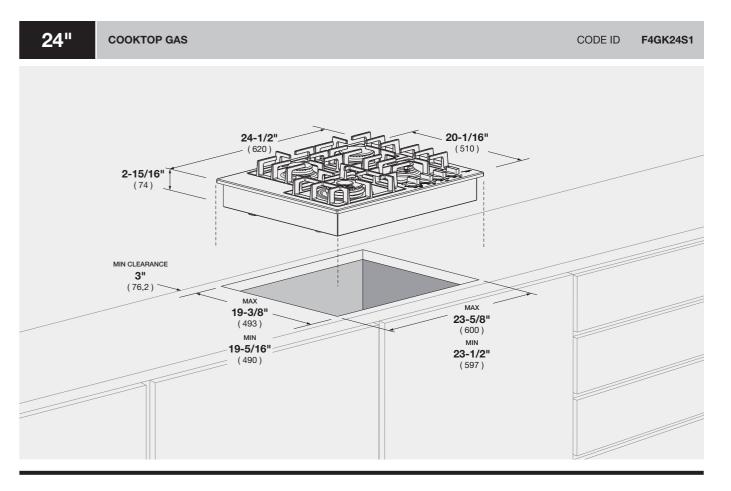



DISTINTO COOKTOP INDUCTION

TECHNICAL DIMENSION


DISTINTO COOKTOP RADIANT

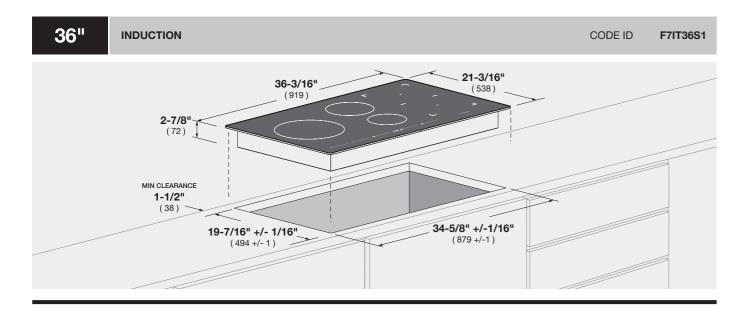


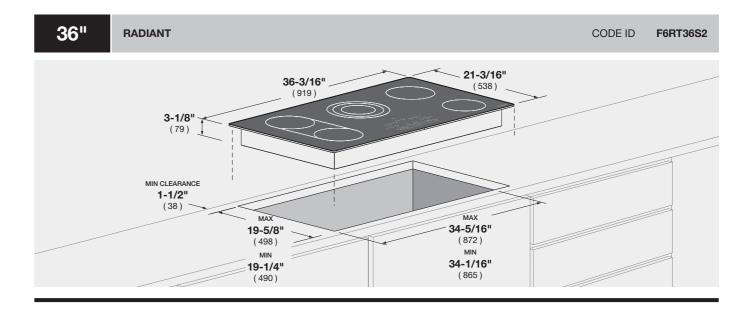

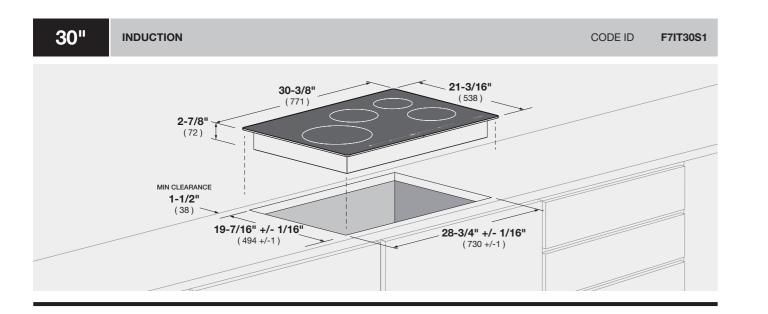

30" RADIANT 30-3/8" (771) 3-1/8" (79) MIN CLEARANCE 1-1/2" (38) MAX 19-5/8" (498) MIN 19-1/4" (490)

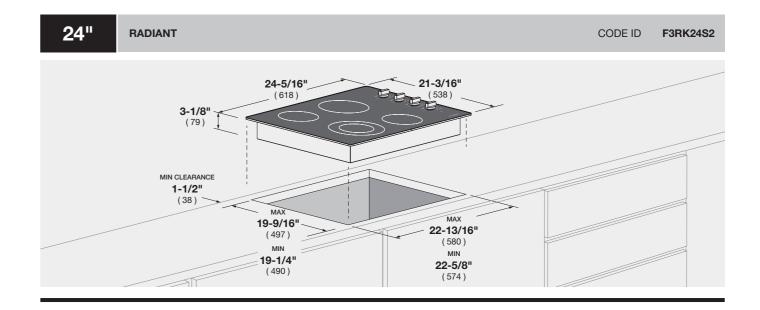


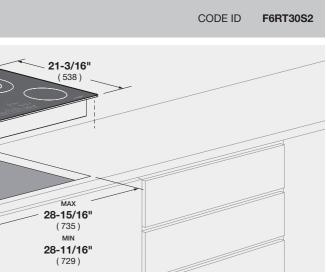


DWG


TECHNICAL



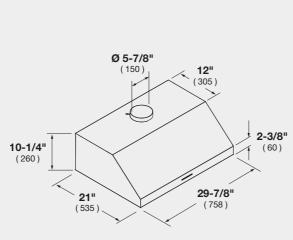


30"

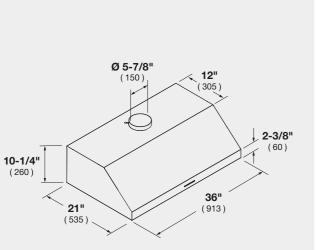


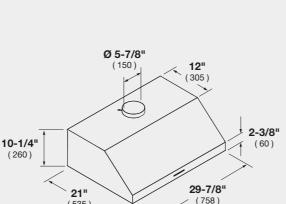


UNDERCABINET HOOD CODE ID F4UC30S1

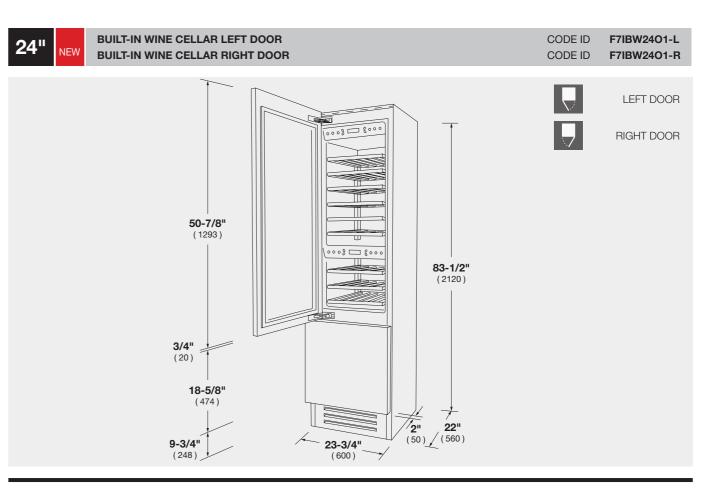




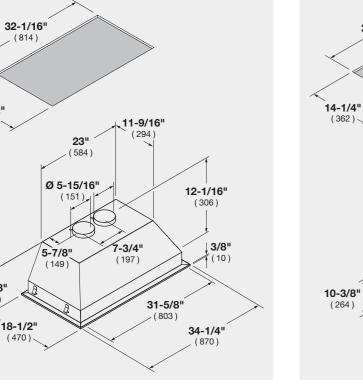

CODE ID F6BP34S1

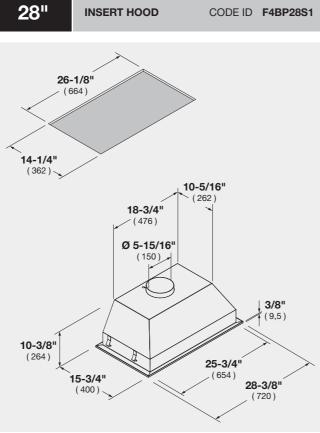

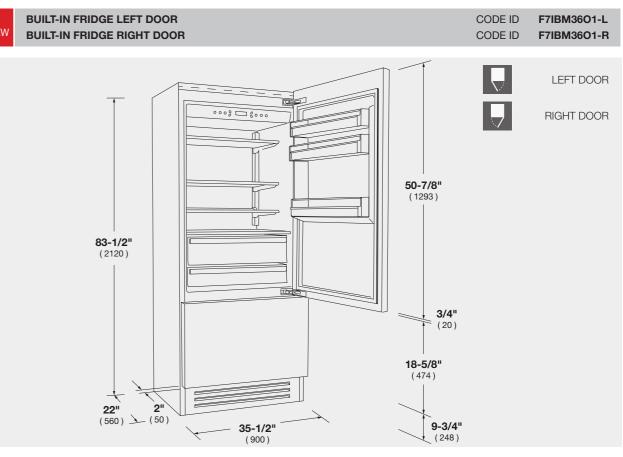



DISTINTO CONSERVATION

TECHNICAL DIMENSION

DISTINTO HOODS

(814)

INSERT HOOD

34"

16-1/2"

(419)


11-5/8"


(295)

DWG TECHNICAL

DISTINTO DISHWASHERS

TECHNICAL DIMENSION

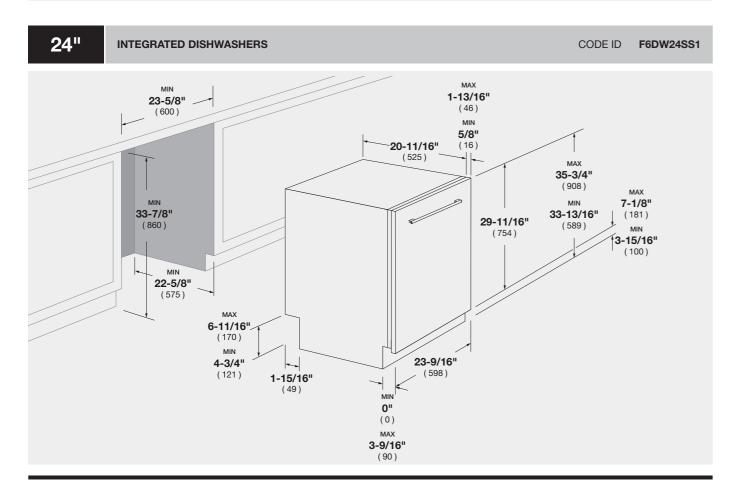

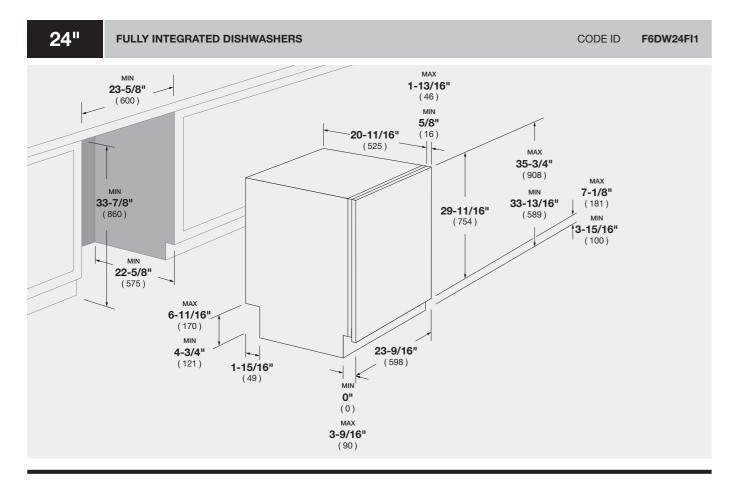

TECHNICAL DATA PROFESSIONAL

202 FULGOR MILANO



DUAL FUEL PROFESSIONAL RANGE



CODE ID			FESSIONAL RANGE	
		F6PDF	486GS1	
Series			00	
		Professional Desig	n - Stainless Steel	
CONTROL PANEL Control Type		11 Heavy (Duty Knobs	
Oven Programming			1 6 Touch Keys	
Display: Clock - Temperature - Function			e LED	
Language		Enç	lish	
СООКТОР	=			
Type Cooking Surface			G or LP) ck Enamel	
GAS COOKTOP FEATURES		Ivialle Dia		
	Elec	tric Re-ignition system	Dual Crown Burners (Bras	s or Alluminum)
	Flan	ne-out sensing	Griddle (1	flat or with rack)
		Mount Injectors	Pre	ssure Regulator
Hanna Duta Orat lana Oratan	L.P.	Conversion Kit		
Heavy Duty Cast Iron Grates Cooking Zones			3 + Griddle	
Burners types			Simmer Burner	
Front-L/Front-R - Power (Max/Min) G20 - 5"			V / 750 (BTU/h) - 220W	
Front-L/Front-R - Power (Max/Min) G31 - 10"			V / 750 (BTU/h) - 220W	
Rear-L/Front Center "Right"/Rear Center "Right"/		18000 (BTU/h) - 5300V	V / 750 (BTU/h) - 220W	
Rear-R - Power (Max/Min) G20 - 5"				
Rear-R/Front Center "Right"/Rear Center "Right"/ Rear-R - Power (Max/Min) G31 - 10"		15000 (BTU/h) - 4400V	V / 750 (BTU/h) - 220W	
Griddle Burner (Center "Left")				
Power (Max/Min) G20 - 5"/G31 - 10"	Thermostat Co	ontrol Griddle Burner - 1150	0 (BTU/h) - 3370W / 2000 (BTU/h) - 590W
OVEN	18" (Acces	ssory Oven)	30" (Ma	in Oven)
Туре		onvection (True Euro Conv.)		
Temperature Regulation	Electronic Control (min/m	nax 170/550°F - 75/290°C)	Electronic Control (min/m	ax 170/550°F - 75/290°C)
OVEN FUNCTIONS	Pyrolytic Self-Clean		Pyrolytic Self-Clean	
	with automatic door latch	Bake	with automatic door latch	Bake
	Convection Broil	Broil	Convection Broil	Broil
	Pizza (Lower Convection)	Oven Lights	Pizza (Lower Convection)	Oven Lights
ELECTRIC OVEN FEATURES				
	Preset/Last Used Temperature Memory	Preheat Indicator (25%, 50%, 75%, 100%)		Preheat Indicator (25%, 50%, 75%, 100%)
	Child Door Lock	Control Display Lock		Control Display Lock
	Automatic Fast Preheat	12/24 Hour Clock Formats	Automatic Fast Preheat	12/24 Hour Clock Formats
	Sabbath Mode	Temperature Display °C/°F	Sabbath Mode	Temperature Display °C/°F
	Gabbatil Wode	Temperature Display 0/ 1	Meat Probe	
OVEN DOOR(S)	Deep Freder	and Minday.	Dava Fasha	
Oven Glass Window Door Cooling System		ssed Window stant Glasses		ssed Window stant Glasses
Door Hinges - Soft-closing System		/ Steady Tilt	Heavy Duty Steady Tilt	
Handle Style		30mm, Metal End caps		30mm, Metal End caps
OVEN CAVITY				
Gross Capacity (cbft)		.7		.4
Usable Capacity (cbft) Cavity Enamel Color		.4		.1
Rack Positions		ack6		ack 6
Oven Lights		Halogen		Halogen
HEATING ELEMENTS (@240V)				
Broil Upper Heating Element		100 W	35	500 W
Upper Auxiliary Element		00 W 00		032 W
Concealed Bake Lower Heating Element		750 W		000 W
Convection Element OVEN ACCESSORIES	1 X 2	500 W	2 X 13	300 W
Chromed Racks		2		2
Enameled Broiler Pan (basin + anti splash)		-		1
Telescopic Chromed Rack		1		1
DIMENSIONS/WEIGHT				
Overall dim - Width			(1216 mm)	
Overall dim - Height (min - max)			23 mm) - (972 mm)	
Overall dim - Depth Gross Weight			(756 mm) (240 kg)	
POWER / RATINGS (208/240 V, 60 HZ)		STA RZC	(240 Kg)	
kW / Amps rating at 120-240V, 60Hz		7.00 kW	/ - 31.3A	
kW / Amps rating at 120-208V, 60Hz			/ - 29.5A	
Power Cable	Nema 14-50P			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual		English / Frei	nch / Spanish	

SOFIA

DUAL FUEL PROFESSIONAL RANGE



CODE ID		36" DUAL FUEL PROFESSIONAL RANGE F6PDF366S1		30" DUAL FUEL PROFESSIONAL RANGE F6PDF304S1	
Series	600		600		
Finish		gn - Stainless Steel		gn - Stainless Steel	
		gri - Otaliness Oteel	1 101655101181 De3ig	gri - Otarriess Oteer	
Control Type	8 Heavy D	Duty Knobs	6 Heavy Duty Knobs		
Oven Programming	Electronic with	h 6 Touch Keys	Electronic with 6 Touch Keys		
Display: Clock - Temperature - Function		e LED	White LED		
Language	English / Fre	nch / Spanish	English / Frei	nch / Spanish	
СООКТОР	040.0		0.10.41		
		G or LP) ck Enamel	GAS (NG or LP) Matte Black Enamel		
Cooking Surface GAS COOKTOP FEATURES	IVIALLE DIA	ick Enamei	Ivialle Bla	CK Enamei	
Electric Re-ignition system		•		•	
Flame-out sensing		•		•	
Top Mount Injectors		•		•	
.P. Conversion Kit		•		•	
Dual Crown Brass Burner		•		•	
leavy Duty Cast Iron Grates		3		2	
Cooking Zones		6		4	
Burners types		Simmer Burner	All Dual Flame/	/Simmer Burner	
Power Front-L,Front-R (Max/Min) NG	20000 (BTU/h) - 5900\	N / 750 (BTU/h) - 220W			
Power Front-R (Max/Min) NG Power (Max/Min) NG		- N / 750 (DTU/b) 00014/		N / 750 (BTU/h) - 220W	
Power (Max/Min) NG Power (Max/Min) LP		N / 750 (BTU/h) - 220W N / 750 (BTU/h) - 220W		V / 750 (BTU/h) - 220W V / 750 (BTU/h) - 220W	
OVEN	13000 (B10/II) - 44001	м, тоцыто/пј - 22000	13000 (B10/II) - 4400V	v / / JU (DTU/II) - 22000	
	Electric Self-clean - Dual C	convection (True Euro Conv.)	Electric Self-clean - Dual C	onvection (True Euro Cor	
emperature Regulation		nax 170/550°F - 75/290°C)	Electronic Control (min/m		
OVEN FUNCTIONS					
	Pyrolytic Self-Clean	Dehydrate	Pyrolytic Self-Clean	Dehydra	
	True Convection	Thaw (Defrost)	True Convection	Thaw (Defro	
	Convection Broil	Proof (Warm)	Convection Broil	Proof (War	
	Convection Roast	Keep warm (Warm Plus)	Convection Roast	Keep warm (Warm Plu	
	Pizza (Lower Convection)	Oven Lights	Pizza (Lower Convection)	Oven Ligh	
	Bake	Broil	Bake	Bi	
ELECTRIC OVEN FEATURES	D 14 11 1		D 10 11 1		
	Preset/Last Used	Preheat Indicator	Preset/Last Used	Preheat Indicat	
	Temperature Memory	(25%, 50%, 75%, 100%)	Temperature Memory	(25%, 50%, 75%, 100	
	Child Door Lock	Control Display Lock	Child Door Lock	Control Display Lo	
	Fast Preheat Sabbath Mode	12/24 Hour Clock Formats Temperature Display °C/°F	Fast Preheat Sabbath Mode	12/24 Hour Clock Forma Temperature Display °C/	
	Meat Probe	Temperature Display 0/1	Meat Probe	Temperature Display C/	
OVEN DOOR(S)	Meat 110De		Meat 110be		
Oven Glass Window	Deep Embossed	Extra Wide Window	Deep Embossed B	Extra Wide Window	
Door Cooling System	4 Heat Resis	stant Glasses	4 Heat Resis	stant Glasses	
Door Hinges - Soft-closing System	Heavy Duty	y Steady Tilt	Heavy Duty	/ Steady Tilt	
landle Style	Stainless Steel Tube	with Metal End caps	Stainless Steel Tube	with Metal End caps	
OVEN CAVITY					
Gross Capacity (cbft)		.7		.4	
Jsable Capacity (cbft)		.9		.1	
Cavity Enamel Color		ack	Black		
Rack Positions Oven Lights		6 Helegen		6 Helegen	
IEATING ELEMENTS (@240V)	3X2UW	Halogen	3X20W	Halogen	
Broil Upper Heating Element	3	500 W	31	500 W	
Jpper Auxiliary Element		032 W	1032 W		
Concealed Bake Lower Heating Element		000 W	3000 W		
Convection Element		300 W		300 W	
OVEN ACCESSORIES					
Chromed Racks		2		2	
nameled Broiler Pan (basin + anti splash)		1		1	
elescopic Chromed Rack		1		1	
DIMENSIONS/WEIGHT	05 0///	(010	00 0///	(750)	
Overall dim - Width	35 - 3/4"	(910 mm)	29 - 3/4"	(758 mm)	
Overall dim - Height (min - max)	36 3/8", 38 1/4" 29 - 3/4"	(923 mm) - (972 mm)	36 3/8", 38 1/4" 29 - 3/4"	(923 mm) - (972 mm)	
Overall dim - Depth Gross Weight	29 - 3/4" 382 lbs	(756 mm) (174 kg)	29 - 3/4" 326 lbs	(756 mm) (148 kg)	
POWER / RATINGS (208/240 V, 60 HZ)	302 IDS	(1/4 NY)	520 IDS	(140 Kg)	
W / Amps rating at 120-240V, 60Hz	3 84 kM	/ - 16.9A	3 84kW	/ - 16.9A	
W / Amps rating at 120-208V, 60Hz		/ - 17.5A		/ - 17.5A	
Power Cable		14-50P		14-50P	
NSTRUCTIONS FOR USE					
Jse & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Fre	nch / Spanish	
JSE & Gale Mailual / Ilistaliation Mailual	English / Fic				



TECHNICAL DATA

SOFIA

ALL GAS PROFESSIONAL RANGE





CODE ID36" ALL GAS PROFESSIONAL RANGE F6PGR366S230" ALL GAS PROFESSIONAL F F6PGR304S2Series600600FinishProfessional Design - Stainless SteelProfessional Design - Stainless SteelCONTROL PANELControl Type8 Heavy Duty Knobs6 Heavy Duty KnobsControl Type8 Heavy Duty Knobs6 Heavy Duty KnobsDisplay: Temperature - FunctionWhite LEDWhite LEDIgnition/Temperature controlElectronic Control (min/max 170/550°F)Electronic Control (min/max 170COOKTOP7GAS (NG or LP)GAS (NG or LP)Cooking SurfaceMatte Black EnamelMatte Black EnamelGAS COOKTOP FEATURES••		
Finish Professional Design - Stainless Steel Professional Design - Stainless CONTROL PANEL Control Type 8 Heavy Duty Knobs 6 Heavy Duty Knobs Display: Temperature - Function White LED White LED White LED Ignition/Temperature control Electronic Control (min/max 170/550°F) Electronic Control (min/max 170 COOKTOP	Steel	
CONTROL PANEL • Control Type 8 Heavy Duty Knobs 6 Heavy Duty Knobs Display: Temperature - Function White LED White LED Ignition/Temperature control Electronic Control (min/max 170/550°F) Electronic Control (min/max 170/550°F) COOKTOP • • Type GAS (NG or LP) GAS (NG or LP) Cooking Surface Matte Black Enamel Matte Black Enamel GAS COOKTOP FEATURES • •	Steel	
Control Type 8 Heavy Duty Knobs 6 Heavy Duty Knobs Display: Temperature - Function White LED White LED Ignition/Temperature control Electronic Control (min/max 170/550°F) Electronic Control (min/max 170/550°F) COOKTOP Type GAS (NG or LP) GAS (NG or LP) Cooking Surface Matte Black Enamel Matte Black Enamel GAS COOKTOP FEATURES • •		
Display: Temperature - Function White LED White LED Ignition/Temperature control Electronic Control (min/max 170/550°F) Electronic Control (min/max 170/550°F) COOKTOP Type GAS (NG or LP) GAS (NG or LP) Cooking Surface Matte Black Enamel Matte Black Enamel GAS COOKTOP FEATURES Electric Re-ignition system •	6 Haava Duty Knaba	
Ignition/Temperature control Electronic Control (min/max 170/550°F) Electronic Control (min/max 170/550°F) COOKTOP		
Type GAS (NG or LP) GAS (NG or LP) Cooking Surface Matte Black Enamel Matte Black Enamel GAS COOKTOP FEATURES Electric Re-ignition system •	/550°F)	
Cooking Surface Matte Black Enamel Matte Black Enamel GAS COOKTOP FEATURES Electric Re-ignition system •		
GAS COOKTOP FEATURES Electric Re-ignition system •		
Flame-out sensing		
Top Mount Injectors • L.P. Conversion Kit •		
Dual Crown Brass Burner • •		
Heavy Duty Cast Iron Grates 3 2		
Cooking Zones 6 4		
Burners types All Dual Flame/Simmer Burner All Dual Flame/Simmer Burner Power Front-L, Front-R (Max/Min) NG 20000 (BTU/h) - 5900W / 750 (BTU/h) - 220W -		
Power Front-R (Max/Min) NG - 20000 (BTU/h) - 5900W / 750 (BTU/		
Power (Max/Min) NG 18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W 18000 (BTU/h) - 5300W / 750 (BTU/h)		
Power (Max/Min) LP 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W 15000 (BTU/h) - 4400W / 750 (BTU/h) - 000 (BTU/h) - 4400W / 750 (BTU/h) - 4400W / 750 (BTU/h) - 15000 (BTU/h) -	'h) - 220W	
Type Gas - Dual Convection Gas - Dual Convection		
Temperature Regulation Electronic thermostat control Electronic thermostat control	ol	
OVEN FUNCTIONS		
Bake Bake Bake Broil		
Pizza Pizza		
GAS OVEN FEATURES		
Electronic Flame Ignition Electronic Flame Ignition Flame-out Sensing Flame-out Sensing		
Flame-out Auto-off Flame-out Auto-off		
Sabbath Mode Sabbath Mode		
L.P. Conversion Kit L.P. Conversion Kit		
Oven Glass Window Deep Embossed Extra Wide Window Deep Embossed Extra Wide W	indow	
Door Cooling System 4 Heat Resistant Glasses 4 Heat Resistant Glasses		
Door Hinges - Soft-closing System Heavy Duty Steady Tilt Heavy Duty Steady Tilt		
Handle Style Stainless Steel Tube with Metal End caps Stainless Steel Tube with Metal End caps	nd caps	
Gross Capacity (cbft) 5.7 4.4		
Usable Capacity (cbft) 4.4 3.6		
	Black	
Rack Positions 6 6 Oven Lights 3x20W Halogen 3x20W Halogen		
NOVA BROILER SYSTEM BURNER		
Power (Max) NG 18000 (BTU/h) - 5300W 14000 (BTU/h) - 4102W		
Power (Max) LP 17000 (BTU/h) - 5000W 13000 (BTU/h) - 3800W BAKE BURNER 1 <th1< th=""> 1<td colspan="2">13000 (BTU/h) - 3800W</td></th1<>	13000 (BTU/h) - 3800W	
Power (Max) NG 21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W		
Power (Max) LP 21500 (BTU/h) - 6300W 16000 (BTU/h) - 4700W		
OVEN ACCESSORIES		
Chromed Racks 2 2 Enameled Broiler Pan (basin + anti splash) 1 1		
Telescopic Chromed Rack 1 1		
DIMENSIONS/WEIGHT		
Overall dim - Width 35 - 3/4" (910 mm) 29 - 3/4" (758 mm) Overall dim - Height (min may) 26 2/9" 28 1/4" (022 mm) (072 mm) 26 2/9" 28 1/4" (022 mm)	(070 mm)	
Overall dim - Height (min - max) 36 3/8", 38 1/4" (923 mm) - (972 mm) 36 3/8", 38 1/4" (923 mm) Overall dim - Depth 29 - 3/4" (756 mm) 29 - 3/4" (756 mm)	- (972 mm)	
Gross Weight 377 lbs (171 kg) 322 lbs (146 kg)		
POWER / RATINGS (120 V, 60 HZ)		
Watts / Amps 200W - 1.7A 200W - 1.7A Power Cable Nema 5-15P Nema 5-15P		
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual English / French / Spanish English / French / Spanish	1	

SOFIA

INDUCTION PROFESSIONAL RANGE



CODE ID	36" INDUCTION PROFESSIONAL RANGE F6PIR365S1		30" INDUCTION PROFESSIONAL RANGE F6PIR304S1		
Series	600		600		
Finish	Professional Desig	gn - Stainless Steel	Professional Design - Stainless Steel		
CONTROL PANEL					
Control Type		Duty Knobs	6 Heavy Duty Knobs		
Oven Programming Display: Clock - Temperature - Function		h 6 Touch Keys e LED	Electronic with 6 Touch Keys White LED		
Language		glish	English / French / Spanish		
COOKTOP	Eng	91011	English7 11		
Туре	INDU	CTION	INDU	JCTION	
Cooking Surface	Cerami	ic Glass	Ceramic Glass		
INDUCTION COOKTOP FEATURES			<u> </u>		
_	Pot Detection System Melting Function	Residual Heat Indication Simmering Function	Pot Detection System Melting Function	Residual Heat Indication Simmering Function	
	113°F / 45°C	158°F / 70°C (113°F / 45°C	158°F / 70°C	
-	Digital Display	Booster/Fast Boil	Digital Display	Booster/Fast Boil	
	for Power Level	Function for Each Zone	for Power Level	Function for Each Zone	
	Failure Codes Indication	Power Levels: 1 to 9	Failure Codes Indication	Power Levels: 1 to 9	
	Cooling Fan System	Heat up time automatic	Cooling Fan System	Heat up time automatic	
	Child Lock Function	Digital minute minder	Child Lock Function	Cooking Zones: 4	
	Knob for power setting	Cooking Zones: 5	Knob for power setting		
Burners types (Front-L) - Power (Max/Booster) Burners types (Rear-L) - Power (Max/Booster)	Inductor 9" Inductor 7"	(230 mm) 2300W / 3700W (180 mm) 1850W / 3000W	Inductor 9" Inductor 6 - 1/2"	(230 mm) 2300W / 3700W (165 mm) 1400W / 2200W	
Burners types (Rear-L) - Power (Max/Booster) Burners types (Center dual circuit) - Power (Max/Booster)	Inductor 7" Inductor 11"	(180 mm) 1850W / 3000W (280 mm) 3000W / 5500W	Inductor 6 - 1/2"	(105 mm) 1400W / 2200W	
Burners types (Center dual circuit) - Power (Max/Booster) Burners types (Center single circuit) - Power (Max/Booster)	Inductor 7"	(280 mm) 3000W / 5500W (180 mm) 1850W / 2600W		-	
Burners types (Front-R) - Power (Max/Booster)	Inductor 9"	(230 mm) 2300W / 3700W	Inductor 7 - 3/4"	(200 mm) 1850W / 3000W	
Burners types (Rear-R) - Power (Max/Booster)	Inductor 7"	(180 mm) 1850W / 3000W	Inductor 7 - 3/4"	(200 mm) 1850W / 3000W	
OVEN					
Туре		Convection (True Euro Conv.)		Convection (True Euro Conv.)	
Temperature Regulation	Electronic Control (min/m	nax 170/550°F - 75/290°C)	Electronic Control (min/max 170/550°F - 75/290°C)		
OVEN FUNCTIONS					
-	Pyrolytic Self-Clean True Convection	Broil Dehydrate	Pyrolytic Self-Clean True Convection	Broil Dehydrate	
-	Convection Broil	Thaw (Defrost)	Convection Broil	Thaw (Defrost)	
-	Convection Roast	Proof (Warm)	Convection Roast	Proof (Warm)	
-	Pizza (Lower Convection)	Keep warm (Warm Plus)	Pizza (Lower Convection)	Keep warm (Warm Plus)	
	Bake	Oven Lights	Bake	Öven Lights	
ELECTRIC OVEN FEATURES					
	Preset/Last Used	Preheat Indicator	Preset/Last Used	Preheat Indicator	
-	Temperature Memory Child Door Lock	(25%, 50%, 75%, 100%) Control Display Lock	Temperature Memory Child Door Lock	(25%, 50%, 75%, 100%) Control Display Lock	
-	Automatic Fast Preheat	12/24 Hour Clock Formats	Fast Preheat	12/24 Hour Clock Formats	
-	Sabbath Mode	Temperature Display °C/°F	Sabbath Mode	Temperature Display °C/°F	
	Meat Probe		Meat Probe		
OVEN DOOR(S)					
Oven Glass Window		ssed Window		Extra Wide Window	
Door Cooling System		stant Glasses	4 Heat Resistant Glasses Heavy Duty Steady Tilt		
Door Hinges - Soft-closing System		y Steady Tilt e Ø30mm, Pro Style	Stainless Steel Tube with Metal End caps		
Handle Style OVEN CAVITY	Stairliess Steel TUD	e soonnin, Fio olyle	Stainless Steel TUD	Stamless Steel Tube with Metal End Caps	
Gross Capacity (cbft)	5	5.7		4.4	
Usable Capacity (cbft)		.9	4.4		
Cavity Enamel Color	Bla	ack	E	lack	
Rack Positions		6	6		
Oven Lights	3x20W	Halogen	3x20W Halogen		
HEATING ELEMENTS (@240V) Broil Upper Heating Element	0	500 W/		2500 W/	
Upper Auxiliary Element		500 W 032 W	3500 W 1032 W		
Concealed Bake Lower Heating Element		000 W	1032 W 3000 W		
Convection Element		300 W	2 x 1300 W		
OVEN ACCESSORIES	241				
	2 Chromed Racks	1 Telescopic Chromed Rack	2 Chromed Racks	1 Telescopic Chromed Rack	
	1 Enameled Broiler Pan		1 Enameled Broiler Pan		
	(basin + anti splash)		(basin + anti splash)		
DIMENSIONS/WEIGHT	35 - 3/4"	(010 mm)	29 - 3/4"	(759 mm)	
Overall dim Width	35 - 3/4" 36 3/8", 38 1/4"	(910 mm) (923 mm) - (972 mm)	<u>29 - 3/4"</u> 36 3/8", 38 1/4"	(758 mm) (923 mm) - (972 mm)	
Overall dim - Width Overall dim - Height (min - max)			29 - 3/4"	(756 mm)	
Overall dim - Height (min - max)		(/ 30 [[[[]]]			
	29 - 3/4" 382 lbs	(756 mm) (174 kg)	311 lbs	(141 kg)	
Overall dim - Height (min - max) Overall dim - Depth	29 - 3/4"	(174 kg)	311 lbs	(141 kg)	
Overall dim - Height (min - max) Overall dim - Depth Gross Weight POWER / RATINGS (208/240 V, 60 HZ) kW / Amps rating at 120-240V, 60Hz	29 - 3/4" 382 lbs 12kW - 45.8A (Limited	(174 kg) Maximum Output Amp.)	11kW	/ - 45.8A	
Overall dim - Height (min - max) Overall dim - Depth Gross Weight POWER / RATINGS (208/240 V, 60 HZ) kW / Amps rating at 120-240V, 60Hz kW / Amps rating at 120-208V, 60Hz	29 - 3/4" 382 lbs 12kW - 45.8A (Limited 10kW - 48.5A (Limited	(174 kg) Maximum Output Amp.) Maximum Output Amp.)	11kW 10kW	/ - 45.8A / - 48.5A	
Overall dim - Height (min - max) Overall dim - Depth Gross Weight POWER / RATINGS (208/240 V, 60 HZ) kW / Amps rating at 120-240V, 60Hz kW / Amps rating at 120-208V, 60Hz Power Cable	29 - 3/4" 382 lbs 12kW - 45.8A (Limited 10kW - 48.5A (Limited	(174 kg) Maximum Output Amp.)	11kW 10kW	/ - 45.8A	
Overall dim - Height (min - max) Overall dim - Depth Gross Weight POWER / RATINGS (208/240 V, 60 HZ) kW / Amps rating at 120-240V, 60Hz kW / Amps rating at 120-208V, 60Hz	29 - 3/4" 382 lbs 12kW - 45.8A (Limited 10kW - 48.5A (Limited Nema	(174 kg) Maximum Output Amp.) Maximum Output Amp.)	11kW 10kW Nema	/ - 45.8A / - 48.5A	



TECHNICAL DATA

SOFIA

PROFESSIONAL OVEN





CODE ID	30" PROFESSIONAL SINGLE OVEN F6PSP30S1		30" PROFESSIONAL DOUBLE OVEN F6PDP30S1		
Series	F	600	600		
Finish		gn - Stainless Steel			
CONTROL PANEL			Professional Design - Stainless Steel		
Control Type	2 Heavy [Duty Knobs	2 Heavy Duty Knobs		
Oven Programming	Electronic wit	h 6 Touch Keys	Electronic with 6 Touch Keys		
Display: Clock - Temperature - Timer	Whit	e LED	White LED		
Language	En	glish	Eng	llish	
OVEN					
Туре		Convection		Convection	
Temperature Regulation OVEN FUNCTIONS	Electronic Control (min/n	nax 170/550°F - 75/290°C)	Electronic Control (min/m	ax 170/550°F - 75/290°C)	
OVEN FUNCTIONS	Pyrolytic Self-Clean	Broil	Pyrolytic Self-Clean	Broil	
	True Convection	Dehydrate	True Convection	Dehydrate	
	Convection Bake	Thaw (Defrost)	Convection Bake	Thaw (Defrost)	
	Convection Bake	Proof (Warm)	Convection Bake	Proof (Warm)	
	Convection Bron	Keep warm (Warm Plus)	Convection Broll	Keep warm (Warm Plus)	
	Pizza (Lower Convection)	Oven Lights	Pizza (Lower Convection)	Oven Lights	
	Bake		Bake		
ELECTRIC OVEN FEATURES	Daito		Bailo		
	Preset/Last Used	Preheat Indicator	Preset/Last Used	Preheat Indicator	
	Temperature Memory	(25%, 50%, 75%, 100%)	Temperature Memory	(25%, 50%, 75%, 100%)	
	Control Display Lock	Sabbath Mode	Control Display Lock	Sabbath Mode	
	Child Door Lock	Temperature Display °C/°F	Child Door Lock	Temperature Display °C/°F	
	Meat Probe		Meat Probe (Upper Oven Only)		
OVEN DOOR(S)					
Oven Glass Window	v	hrough Glass	v	nrough Glass	
Door Cooling System		stant Glasses		tant Glasses	
Door Hinges - Soft-closing System		y Steady Tilt		Steady Tilt	
Handle Style	Tubula	ar Steel	Tubula	r Steel	
				.4	
Gross Capacity (cbft) Usable Capacity (cbft)	4.4		4		
Cavity Enamel Color		ack		ack	
Rack Positions		6		3 3	
Oven Lights		Halogen		Halogen	
HEATING ELEMENTS (@240V)	CALCU.		0/2011		
Broil Upper Heating Element	3	500 W	35	500 W	
Upper Auxiliary Element	1	032 W	1032 W		
Concealed Bake Lower Heating Element	3	000 W	3000 W		
Convection Element	2 x 1	300 W	2 x 1300 W		
OVEN ACCESSORIES					
Chromed Racks		2	2 on both ovens		
Enameled Broiler Pan (basin + anti splash)		1	1 on both ovens		
Telescopic Chromed Rack	1		1 on both ovens		
DIMENSIONS/WEIGHT					
Overall dim - Width	29 - 11/16"	(754 mm)	29 - 11/16"	(754 mm)	
Overall dim - Height	27 - 7/8"	(707 mm)	51"	(1295 mm)	
Overall dim - Depth Cut-out - Width	24"	(610 mm)	24"	(610 mm)	
Cut-out - Width Cut-out - Height (min)	28 - 7/16" 27 - 3/8"	(722 mm) (696 mm)	28 - 7/16" 50"	(722 mm) (1270 mm)	
Cut-out - Height (min) Cut-out - Depth (min)	27 - 3/8	(590 mm)	23 - 1/4"	(1270 mm)	
Gross Weight	198 lbs	(90 kg)	340 lbs	(154 kg)	
POWER / RATINGS (208/240 V, 60 HZ)	100 100		540 105		
kW / Amps rating at 240V, 60Hz	3.84 kV	V - 16.9A	7.68 kW	/ - 33.8A	
kW / Amps rating at 2400, 60Hz		V - 17.5A		- 32.4A	
Power Cable		nduit		Iduit	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Fre	nch / Spanish	
see a care mandar, motanation manual	English / French / Spanish		English / French / Spanish		

SOFIA

PROFESSIONAL WARMING DRAWER

CODE ID	30" PROFESSIONAL WARMING DRAWER F6PWD30S1			
Туре	Warming	J Drawer		
Front finish	Stainless Steel w	vith Pro - Handle		
Internal shelf	Inc	хх		
Compatible with ovens	F6PSP30S1 -	F6PDP30S1		
PERFORMANCE				
Maximum temperature	194°F.	/ 90°C		
Cooking at low temperature (slow cooking)	•	•		
Leavening	•			
Heating dishes and food	•			
Slow close assistance	•	•		
Open / Close push - pull system	-			
CONTROL				
Thermostat	86°F - 194°F	/ 30°C - 90°C		
Fan assisted	•)		
Function Indicator / Thermostat on/off	•			
SAFETY				
Safety front	•			
ELECTRICAL SPECIFICATIONS				
Max power absorbed (W)	1100W			
Power (V-Hz)	120	/60		
Power cord)		
Plug	•)		
CAPACITY				
Volume (cbft-litri)	2,1	61.4		
DIMENSIONS	, , , , , , , , , , , , , , , , , , , ,			
Overall dim - Width	29 7/8"	(758 mm)		
Overall dim - Height	10 3/8"	(264 mm)		
Overall dim - Depth	23"	(583 mm)		
Door Depth with Overlay	2 1/8"	(54 mm)		
Door Depth with Pro Handle	4 11/16"	(119 mm)		
Cut-out - Width	28 7/16"	(722 mm)		
Cut-out - Height	9 1/4" (235 mm)			
Cut-out - Depth	24" (610 mm)			
WEIGHT				
Net Weight	68.5 lbs	31 Kg		
Gross Weight	75.2 lbs 34.1 Kg			
	73.2 103			

DATA TECHNICAL



PROFESSIONAL GAS RANGE TOP





SOFIA

PROFESSIONAL INDUCTION RANGE TOP

CODE ID	36" PROFESSIONAL GAS RANGE TOP F6GRT366S1			L GAS RANGE TOP 7304S1	
Series	6	00	60	600	
Finish	Professional Desi	gn - Stainless Steel	Professional Desig	n - Stainless Steel	
CONTROL PANEL					
Control Type	6 Heavy [Duty Knobs	4 Heavy D	uty Knobs	
СООКТОР					
Туре	GAS (N	IG or LP)	GAS (N	G or LP)	
Cooking Surface	Matte Bla	ick Enamel	Matte Bla	ck Enamel	
GAS COOKTOP FEATURES					
Electric Re-ignition system		•		•	
Flame-out sensing		•		•	
Top Mount Injectors		•		•	
Dual Crown Brass Burner		•		•	
Simmer Plate	Optional Op		tional		
Wok Ring	Optional		Optional		
Heavy Duty Cast Iron Grates	3		2		
Cooking Zones	6		4		
Burners types	All Dual Flame/Simmer Burner		All Dual Flame/	Simmer Burner	
Power Front-L,Front-R (Max/Min) NG	20000 (BTU/h) - 5900W / 750 (BTU/h) - 220W			-	
Power Front-R (Max/Min) NG		-	20000 (BTU/h) - 5900W / 750 (BTU/h) - 220W		
Power (Max/Min) NG	18000 (BTU/h) - 5300	W / 750 (BTU/h) - 220W	18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W		
Power (Max/Min) LP	15000 (BTU/h) - 4400	W / 750 (BTU/h) - 220W	15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W		
DIMENSIONS/WEIGHT					
Overall dim - Width	35 - 3/4"	(910 mm)	29 - 3/4"	(758 mm)	
Overall dim - Height	7"	(179 mm)	7"	(179 mm)	
Overall dim - Depth	29 - 3/4"	(756 mm)	29 - 3/4"	(756 mm)	
Cut-out - Width	36"	(914 mm)	30"	(762 mm)	
Cut-out - Height (min)	7"	(179 mm)	7"	(179 mm)	
Cut-out - Depth (min - max)	24", 25 - 1/2"	(610 mm) - (650 mm)	24", 25 - 1/2"	(610 mm) - (650 mm)	
Gross Weight	121 lbs	(55 kg)	100 lbs	(45 kg)	
POWER / RATINGS (120 V, 60 HZ)					
Amps	0.1A		0.1A		
Power Cable	Nema 5-15P		Nema 5-15P		
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual English / French / Spanish English / French / Spanish		nch / Spanish			

CODE ID	30" PROFESSIONAL INDUCTION RANGE TOP F6IRT304S1		
Series	600		
Finish	Professional Design - Ceramic and Stainless Steel		
CONTROL PANEL			
Control Type	4 Heavy Duty Knobs		
СООКТОР			
Туре	INDUCTION		
Cooking Surface	Ceramic Glass		
INDUCTION COOKTOP FEATURES			
Pot Detection System	•		
Child Lock Function	•		
Failure Codes Indication	•		
Knob for Power Setting (illuminated)	•		
Power Levels	1 to 9		
Digital Display for Power Level	Optional		
Melting Function 113°F / 45°C	2		
Warming Function 158°F / 70°C	4		
Booster/Fast Boil Function for Each Zone	•		
Automatic Heat-up Time	•		
Residual Heat Indication	•		
Cooking Zones	4		
Burners types (Front-L) - Power (Max/Booster)	Inductor 9" (230 mm) 2300W / 3700W		
Burners types (Rear-L) - Power (Max/Booster)	Inductor 6 - 1/2" (165 mm) 1400W / 2200W		
Burners types (Front/Rear-R) Power (Max/Booster)	Inductor 7 - 3/4" (200 mm) 1850W / 3000W		
DIMENSIONS/WEIGHT			
Overall dim - Width	29 - 3/4" (758 mm)		
Overall dim - Height	7" (179 mm)		
Overall dim - Depth	29 - 3/4" (756 mm)		
Cut-out - Width	30" (762 mm)		
Cut-out - Height (min)	7" (179 mm)		
Cut-out - Depth (min - max)	24", 25 - 3/8" (610 mm) - (644 mm)		
Gross Weight	100 lbs (45 kg)		
POWER / RATINGS (120 V, 60 HZ)			
kW / Amps rating at 240V, 60Hz	7.2 kW - 30A		
Power Cable	Conduit		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		



PROFESSIONAL PRO GAS COOK TOP



CODE ID	36" PROFESSIONAL PRO GAS COOK TOP F6PGK365S1		
Series	600		
Finish	Stainless Steel		
CONTROL PANEL			
Control Type	Knobs		
COOKTOP			
Туре	GAS (NG or LP)		
Cooking Surface	Matte Black Enamel		
GAS COOKTOP FEATURES			
Electric Re-ignition system	•		
Flame-out sensing	•		
Dual Crown Brass Burner	•		
Simmer Plate	Optional		
Small Pot Insert (for single burners only)	Optional		
Wok Ring (for dual burner only)	Optional		
Heavy Duty Cast Iron Grates	3		
Cooking Zones	5		
Brass Burners types	All Brass Dual Flame/Simmer Burner		
Power (Max/Min) (Front-L)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W		
Power (Max/Min) (Rear-L)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W		
Power (Max/Min) (Front Center)	20000 (BTU/h) - 5880W / 750 (BTU/h) - 220W		
Power (Max/Min) (Rear-R)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W		
Power (Max/Min) (Front-R)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W		
DIMENSIONS/WEIGHT			
Overall dim - Width			
Overall dim - Height	4 - 5/8" (118 mm)		
Overall dim - Depth	21" (533 mm)		
Cut-out - Width (min - max)	34 - 1/2" , 34 - 11/16" (876 mm) - (881 mm)		
Cut-out - Height (min)	3 - 3/8" (87 mm)		
Cut-out - Depth (min - max)	19 - 9/16" , 19 - 3/4" (497 mm) - (502 mm)		
Gross Weight	73 lbs (33.2 kg)		
POWER / RATINGS (120 V, 60 HZ)			
Amps	0.1A		
Max Power	80000 (BTU/h) - 23480W		
Power Cable	Nema 5-15P		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		

SOFIA

PROFESSIONAL PRO GAS COOK TOP


CODE ID	30" PROFESSIONAL PRO GAS COOK TOP F6PGK305S1		
Series	600		
Finish	Stainless Steel		
CONTROL PANEL			
Control Type	Knobs		
COOKTOP			
Туре	GAS (NG or LP)		
Cooking Surface	Matte Black Enamel		
GAS COOKTOP FEATURES			
Electric Re-ignition system	•		
Flame-out sensing	•		
Dual Crown Brass Burner	•		
Simmer Plate	Optional		
Small Pot Insert (for single burners only)	Optional		
Wok Ring (for dual burner only)	Optional		
Heavy Duty Cast Iron Grates	2		
Cooking Zones	5		
Burners types	All Brass Dual Flame/Simmer Burner		
Power (Max/Min) (Front-L)	8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W		
Power (Max/Min) (Rear-L)	10500 (BTU/h) - 3080W / 2200 (BTU/h) - 645W		
Power (Max/Min) (Center)	20000 (BTU/h) - 5880W / 750 (BTU/h) - 220W		
Power (Max/Min) (Rear-R)	10500 (BTU/h) - 3080W / 2200 (BTU/h) - 645W		
Power (Max/Min) (Front-R)	8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W		
DIMENSIONS/WEIGHT			
Overall dim - Width	30"	(762 mm)	
Overall dim - Height	4 - 5/8"	(118 mm)	
Overall dim - Depth	21"	(533 mm)	
Cut-out - Width (min - max)	28" - 1/2 , 28" - 11/16	(724 mm) - (729 mm)	
Cut-out - Height (min)	3 - 3/8"	(87 mm)	
Cut-out - Depth (min - max)	19" - 9/16 , 19" - 3/4	(497 mm) - (502 mm)	
Gross Weight	61 lbs	(27.5 kg)	
POWER / RATINGS (120 V, 60 HZ)			
Amps	0.1A		
Max Power	57000 (BTU/h) - 16730W		
Power Cable	Nema 5-15P		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		



ACCENTO


36" DUAL FUEL PROFESSIONAL RANGE





ACCENTO

30" DUAL FUEL PROFESSIONAL RANGE

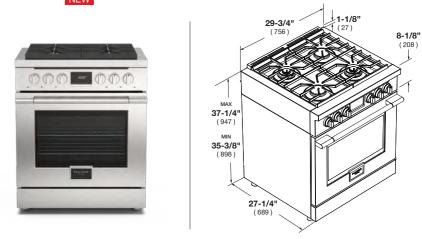

CODE ID	F4PDF3665	S1 - 36" DUAL FUEL PROFESSION	IAL RANGE
Series and Finish	400 Series - Professional Design - Stainless Steel		
CONTROL PANEL Control Type	Electronic		
Display: Clock - Temperature - Function		White LED	
COOKTOP		White LLD	
Cooking Surface		Black Enameled	
Туре		GAS (NG or LP)	
GAS COOKTOP FEATURES			
	Electric Flame Ignition and L.P. Conversion Kit Top M		
-	Flame-out sensing	Dual Crown Brass Burner	Pressure Regulato
Cooking Zones	, and the test test of	6	
Burners types		Dual Flame/Rapid Burners	
Power Front L+R (Max/Min) G20-5" (NG)	1800	0 (BTU/h) - 5300W / 950 (BTU/h) -	275W
Power Rear L+R (Max/Min) G20-5" (NG)	1500	0 (BTU/h) - 4400W / 2200 (BTU/h) -	645W
Power Front Middle (Max/Min) G20-5" (NG)	1500	0 (BTU/h) - 4400W / 2200 (BTU/h) -	645W
Power Rear Middle (Max/Min) G20-5" (NG)	1800	0 (BTU/h) - 5300W / 950(BTU/h) -	275W
Power Front L+R (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 4400W / 950 (BTU/h) -	
Power Rear L+R (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3500W / 2200 (BTU/h) -	
Power Front Middle (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3800W / 2200(BTU/h) -	
Power Rear Middle (Max/Min) G31 - 10" (LP)	1500	0 (BTU/h) - 4400W / 950(BTU/h) -	275W
OVEN		Electric Pyro	
Oven Type	N	Iultifunction 2 Fans (True Euro Conv	r.)
Temperature Regulation		Electronic	
OVEN FUNCTIONS			1
-	Pyrolytic Self-Clean with automatic door latch	Pizza (Lower Convection)	Proof (Warr
	True European Convection	Bake	Bro
-	Bake (Multi level) Dehydrate	Thour (Defrect)	Convection Bro
-	Convection Roast	Thaw (Defrost) Oven Lights	Keep warm (Warm Plus
-	Fast Preheat	Oven Lights	Reep warm (warm nu
ELECTRIC OVEN FEATURES	rastricitat		
	Preset/Last Used	Preheat bar	
	Temperature Memory	(25%, 50%, 75%, 100%)	Automatic Fast Prehea
-	Child Door Lock	Sabbath Mode	Hour Clock Formats AM/PI
-	°F Degree unit	Cubbull mode	
OVEN DOOR(S)			
Oven Glass Window		Deep Embossed Window	
Door Cooling System		4 Pane Heat Resistant Glasses	
Door Hinges		Heavy Duty Steady Tilt	
Handle Style	Stainle	ess Steel Tube d30mm with Metal te	rminals
OVEN CAVITY			
Net Capacity (cbft)		5.7	
Cavity Enamel Color		Black	
Rack Positions		6	
Oven Lights		3x20W Halogen	
HEATING ELEMENTS (@240V)			
Broil Upper Heating Element		3500 W	
Broil Upper Heating Element Upper Auxiliary Element Wattage		1032 W	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element		1032 W 3000 W	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element		1032 W	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES		1032 W 3000 W 2 x 1300 W	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks		1032 W 3000 W 2 x 1300 W 2	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash)		1032 W 3000 W 2 x 1300 W 2 1	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack		1032 W 3000 W 2 x 1300 W 2 2 1 Only as optional ACCESSORY	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack Meat Probe		1032 W 3000 W 2 x 1300 W 2 1	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack Meat Probe DIMENSIONS/WEIGHT		1032 W 3000 W 2 x 1300 W 2 1 Only as optional ACCESSORY Only as optional ACCESSORY	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack Meat Probe DIMENSIONS/WEIGHT Overall dim - Width	35 - 3 00"	1032 W 3000 W 2 x 1300 W 2 1 Only as optional ACCESSORY Only as optional ACCESSORY 4"	10 mm)
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack Meat Probe DIMENSIONS/WEIGHT Overall dim - Width Overall dim - Height (min - max)	39"	1032 W 3000 W 2 x 1300 W 2 1 Only as optional ACCESSORY Only as optional ACCESSORY Year (9) (9)	93 mm)
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack Meat Probe DIMENSIONS/WEIGHT Overall dim - Height (min - max) Overall dim - Depth		1032 W 3000 W 2 x 1300 W 2 1 Only as optional ACCESSORY Only as optional ACCESSORY Year (9) (9)	
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack Meat Probe DIMENSIONS/WEIGHT Overall dim - Height (min - max) Overall dim - Depth POWER / RATINGS (208/240 V, 60 HZ)	39"	1032 W 3000 W 2 x 1300 W 2 1 Only as optional ACCESSORY Only as optional ACCESSORY (99) (4") (93) (4")	93 mm)
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack Meat Probe DIMENSIONS/WEIGHT Overall dim - Width Overall dim - Height (min - max) Overall dim - Depth POWER / RATINGS (208/240 V, 60 HZ) kW / Amps rating at 120-240V, 60Hz	39"	1032 W 3000 W 2 x 1300 W 2 1 Only as optional ACCESSORY Only as optional ACCESSORY Only as optional ACCESSORY 4" (9: 4" 3.84 kW - 16.9 A	93 mm)
Broil Upper Heating Element Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element Convection Element OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack Meat Probe DIMENSIONS/WEIGHT Overall dim - Height (min - max) Overall dim - Depth POWER / RATINGS (208/240 V, 60 HZ)	39"	1032 W 3000 W 2 x 1300 W 2 1 Only as optional ACCESSORY Only as optional ACCESSORY (99) (4") (93) (4")	93 mm)

English / French / Spanish


CODE ID	F4PDF304S1 - 30" DUAL FUEL PROFESSIONAL RANGE		
Series and Finish	400 Se	eries - Professional Design - Stainles	s Steel
CONTROL PANEL			
Control Type	6 Heavy Duty Knobs		
Display: Clock - Temperature - Function	White LED		
COOKTOP			
Cooking Surface	Black Enameled		
Туре		GAS (NG or LP)	
GAS COOKTOP FEATURES			
	Electric Flame Ignition and Re-ignition	L.P. Conversion Kit	Top Mount Injector
	Flame-out sensing	Dual Crown Brass Burner	Pressure Regulato
Cooking Zones		4	
Burners Type		Rapid Burner	
Power Front-L, Rear-R (Max/Min) G20-5" (NG)		0 (BTU/h) - 4400W / 2200 (BTU/h) -	
Power Rear-L, Front-R (Max/Min) G20-5" (NG)) (BTU/h) - 5300W / 950 (BTU/h) -	
Power Front-L, Rear-R (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3500W / 2200 (BTU/h) -	
Power Rear-L, Front-R (Max/Min) G31 - 10" (LP)	15000) (BTU/h) - 4400W / 950 (BTU/h) -	275W
OVEN		Electric Pyro	
Type		Multifunction 2 Fans	
Temperature Regulation		Electronic	
OVEN FUNCTIONS	Power Rear-L, Front-R Pyrolytic Self-Clean with automatic door latch	Pizza (Lower Convection)	Proof (Warr
	True European Convection Bake (Multilevel)	Bake	Bro
	Dehydrate	Thaw (Defrost)	Convection Bro
	Convection Roast	Oven Lights	Keep warm (Warm Plu
ELECTRIC OVEN FEATURES			
	Preset/Last Used Temperature Memory	Preheat Indicator (25%, 50%, 75%, 100%)	Automatic Fast Prehe
	Child Door Lock °F Degree unit	Sabbath Mode	Hour Clock Formats AM / PI
OVEN DOOR(S)			I
Oven Glass Window		Deep Embossed Window	
Door Cooling System		4 Pane Heat Resistant Glasses	
Door Hinges		Heavy Duty Steady Tilt	
Handle Style	Stainle	ess Steel Tube d30mm with Metal te	rminals
OVEN CAVITY			
Net Capacity (cbft)		4.4	
Cavity Enamel Color		Black	
Rack Positions		6	
Oven Lights		3x20W Halogen	
HEATING ELEMENTS (@240V)			
Broil Upper Heating Element		3500 W (240V)	
Upper Auxiliary Element Wattage		1032 W (240V)	
Concealed Bake Lower Heating Element		3000 W (240V)	
Convection Element		2 x 1300 W (240V)	
OVEN ACCESSORIES			
Chromed Racks		2 rack without frontal bend	
Enameled Grill set (basin + anti splash)		1	
Telescopic Chromed Rack		Only as optional ACCESSORY Only as optional ACCESSORY	
Meat Probe DIMENSIONS/WEIGHT (In or Lbs)		Uniy as optional ACCESSORY	
Overall dim - Width	29 - 3	//"	58 mm)
Overall dim - Height (min - max)	29 - 3. 39"	· · · · · · · · · · · · · · · · · · ·	93 mm)
Overall dim - Depth	29 - 3		56 mm)
POWER / RATINGS (208/240 V, 60 HZ)	29-0		
kW / Amps rating at 120-240V, 60Hz		3.84 kW - 16.9Amps	
kW / Amps rating at 120-2400, 60Hz		3.54 kW - 17.5Amps	
Power Cable		Nema 14-50P	
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual		English / French / Spanish	
LISE & Care Manual / Installation Manual	English / French / Spanish		

Use & Care Manual / Installation Manual

ACCENTO


36" ALL GAS PROFESSIONAL RANGE





ACCENTO

30" ALL GAS PROFESSIONAL RANGE

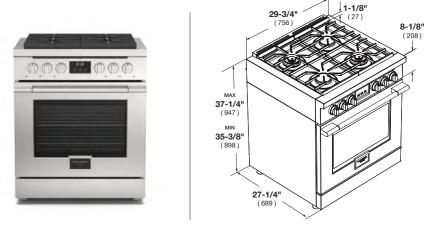

CODE ID	F4PGR366S1 - 36" FULL GAS PROFESSIONAL RANGE		
Series and Finish	400 Series - Professional Design - Stainless Steel		
CONTROL PANEL			
Control Type	Valve		
Clock Display		•	
СООКТОР			
Cooking Surface		Matte Black Enameled	
Туре		GAS (NG or LP)	
GAS COOKTOP FEATURES	Electric Electric and Delignities	Tere Maxima Info atoms	Dual Orange Drage Drage
	Electric Flame and Re-ignition	Top Mount Injectors L.P. Conversion Kit	Dual Crown Brass Burn Pressure Regulate
Heavy Duty Cast Iron Grates	Flame-out sensing	3	Pressure Regulation
Cooking Zones		6	
Burners types		Dual Flame/Rapid Burners	
Power Front L+R (Max/Min) G20 - 5" (NG)	1800	0 (BTU/h) - 5300W / 950 (BTU/h) -	275W
Power Rear L+R (Max/Min) G20 - 5" (NG)		0 (BTU/h) - 4400W / 2200 (BTU/h) -	
Power Front Middle (Max/Min) G20 - 5" (NG)		0 (BTU/h) - 4400W / 2200 (BTU/h) -	
Power Rear Middle (Max/Min) G20 - 5" (NG)		0 (BTU/h) - 5300W / 950 (BTU/h) -	
Power Front L+R (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 4400W / 950 (BTU/h) -	
Power Rear L+R (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3500W / 2200 (BTU/h) ·	
Power Front Middle (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3500W / 2200 (BTU/h) -	
Power Rear Middle (Max/Min) G31 - 10" (LP)	1500	0 (BTU/h) - 4400W / 950 (BTU/h) -	- 275W
OVEN			
Туре	N	Jultifunction 2 Fans (True Euro Conv	r.)
Temperature Regulation		Thermostat	
Injection Oven		T-Zero	
OVEN FUNCTIONS			1
	Pizza (Lower Convection)	Down Bake	Br
GAS OVEN FEATURES			
	Electronic Flame Ignition	Gas safety devices	L.P. Conversion k
	Flame-out Sensing		
OVEN DOOR(S)			
Oven Glass Window		Deep Embossed Window	
Door Cooling System		4 Pane Heat Resistant Glasses	
Door Hinges		Heavy Duty Steady Tilt	
Handle Style	Stair	nless Steel Tube d30mm, Metal term	inals
OVEN CAVITY			
Gross Capacity (cbft)		5.7	
Cavity Enamel Color		Black	
Rack Positions		6	
Oven Lights BOTTOM BURNER		3x20W Halogen	
Power (Max) G20 - 5"		01500 (DTU/b) 6200\W	
	21500 (BTU/h) - 6300W		
Power (Max) G31 - 10"		21500 (BTU/h) - 6300W 21500 (BTU/h) - 6300W	
Power (Max) G31 - 10" GRILL BURNER		21500 (BTU/h) - 6300W	
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG		21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W	
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP		21500 (BTU/h) - 6300W	
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES		21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W	
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks		21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend	
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash)		21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend 1	
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack		21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend	
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack DIMENSIONS/WEIGHT	20 - 2	21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend 1 only as optional ACCESSORY	58 mm)
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack DIMENSIONS/WEIGHT Overall dim - Width		21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend 1 only as optional ACCESSORY 4" (75	58 mm)
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack DIMENSIONS/WEIGHT Overall dim - Width Overall dim - Height (min - max)	39"	21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend 1 only as optional ACCESSORY 4" (75 (95)	93 mm)
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack DIMENSIONS/WEIGHT Overall dim - Width Overall dim - Height (min - max) Overall dim - Depth		21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend 1 only as optional ACCESSORY 4" (75 (95)	
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack DIMENSIONS/WEIGHT Overall dim - Width Overall dim - Height (min - max) Overall dim - Depth POWER / RATINGS (120 V, 60 HZ)	39"	21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend 1 only as optional ACCESSORY 4" (75 (95) (4" (75)	93 mm)
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack DIMENSIONS/WEIGHT Overall dim - Width Overall dim - Height (min - max) Overall dim - Depth	39"	21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend 1 only as optional ACCESSORY 4" (75 (95)	93 mm)
Power (Max) G31 - 10" GRILL BURNER Power (Max) NG Power (Max) LP OVEN ACCESSORIES Chromed Racks Enameled Grill set (basin + anti splash) Telescopic Chromed Rack DIMENSIONS/WEIGHT Overall dim - Width Overall dim - Height (min - max) Overall dim - Depth POWER / RATINGS (120 V, 60 HZ) KW/Amps rating rating at 120V, 60Hz	39"	21500 (BTU/h) - 6300W 18000 (BTU/h) - 5300W 17000 (BTU/h) - 5000W 2 racks without frontal bend 1 only as optional ACCESSORY 4" (75 (95 4" (75 200W - 1.7A	93 mm)

CODE ID	F4PGR304S1 - 30" FULL GAS PROFESSIONAL RANGE		
Series and Finish	400 Series - Professional Design - Stainless Steel		
CONTROL PANEL			
Control Type	Valve		
Commands		2 Knobs	
COOKTOP			
Cooking Surface		Matte Black Enameled	
Туре		GAS (NG or LP)	
GAS COOKTOP FEATURES			
	Electric Flame and Re-ignition	Top Mount Injectors	Dual Crown Brass Burner
	, i i i i i i i i i i i i i i i i i i i	1 ,	
	Flame-out sensing	L.P. Conversion Kit	Pressure Regulator
Heavy Duty Cast Iron Grates		2	
Cooking Zones		4	
Burners types		Dual Flame/Rapid Burners	
Power Front-L,Rear-R (Max/Min) G20-5" (NG)		0 (BTU/h) - 4400W / 2200 (BTU/h) - 6	
Power Rear-L, Front-R (Max/Min) G20-5" (NG)		0 (BTU/h) - 5300W / 950 (BTU/h) - 2	
Power Front-L,Rear-R (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3500W / 2200(BTU/h) - 6	
Power Rear-L,Front-R (Max/Min) G31 - 10" (LP)	1500	0 (BTU/h) - 4400W / 950 (BTU/h) - 2	275W
OVEN			-
Туре	1	Aultifunction 2 Fans (True Euro Conv.	.)
Temperature Regulation		Thermostat	
Injection Oven		T-Zero	
OVEN FUNCTIONS			
	Pizza (Lower Convection)	Down Bake	Broil
GAS OVEN FEATURES			
	Electronic Flame Ignition	Gas safety devices	L.P. Conversion Kit
	Flame-out Sensing		
OVEN DOOR(S)			
Oven Glass Window		Deep Embossed Window	
Door Cooling System		4 Pane Heat Resistant Glasses	
Door Hinges		Heavy Duty Steady Tilt	
Handle Style	Stainle	ess Steel Tube d30mm with Metal ter	minals
OVEN CAVITY			
Gross Capacity (cbft)		4.4	
Cavity Enamel Color		Black	
Rack Positions		6	
Oven Lights		3x20W Halogen	
BOTTOM BURNER			
Power (Max) G20 - 5"		18000 (BTU/h) - 5300W	
Power (Max) G31 - 10"		16000 (BTU/h) - 4700W	
GRILL BURNER			
Power (Max) NG		14000 (BTU/h) - 4102W	
Power (Max) LP		13000 (BTU/h) - 3800W	
OVEN ACCESSORIES			
Chromed Racks		2rack without frontal bend	
Enameled Grill set (basin + anti splash)		1	
Telescopic Chromed Rack		only as optional ACCESSORY	
Meat probe	only as optional ACCESSORY		
DIMENSIONS/WEIGHT		,,,,	
Overall dim - Width	29 - 3/	4" (75	8 mm)
Overall dim - Height (min - max)	39"		3 mm)
Overall dim - Depth	29 - 3/		6 mm)
POWER / RATINGS (120 V, 60 HZ)	23-3/	. (13	- ·····)
KW/Amps rating rating at 120V, 60Hz		200W - 1.7A	
Cable + Plug		Nema 5-15P	
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual		English / Franch / Spanish	
Use a Gare Mariuar / Installation Mariuar		English / French / Spanish	

SOFIA

PROFESSIONAL HOOD





CODE ID		SIONAL HOOD 48DS1		SIONAL HOOD I36DS1
Series	6	00	6	600
Finish	Professional Design - S	Stainless Steel (AISI 430)	Professional Design - S	Stainless Steel (AISI 430)
CONTROL PANEL				
Control Type	4 speed mec	hanical control	4 speed mec	hanical control
PERFORMANCES				
Output (CFM)	10	000	10	000
Sound Level (dB)		75		75
Motor	Twin	Motor	Twin	Motor
Venting Type	Ducted and	recirculating	Ducted and recirculating	
FEATURES				
Filter Style	Pro Baffle		Pro	Baffle
Lighting	6 x 1.2	2W LED	4 x 1.2	2W LED
Single duct diameter	7 - 7/8"	(200 mm)	7 - 7/8"	(200 mm)
DIMENSIONS/WEIGHT				
Overall dim - Width	47 - 7/8"	(1216 mm)	35 - 7/8"	(910 mm)
Overall dim - Height	18"	(460 mm)	18"	(460 mm)
Overall dim - Depth	24"	(610 mm)	24"	(610 mm)
Gross Weight	90 lbs	(41 kg)	70 lbs	(30 kg)
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	860W	- 7.8A	860W	/ - 7.8A
Power Cable	Nema	5-15P	Nema	a 5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Fre	ench / Spanish

SOFIA

PROFESSIONAL INSERT HOOD

CODE ID	48" PROFESSIONA F6BP4		36" PROFESSIONA F6BP34	
Series	600	0	600	
Finish	Stainless Stee	el (AISI 430)	Stainless Stee	I (AISI 430)
CONTROL PANEL				
Control Type	4+4 speed mech	nanical control	4+4 speed mech	anical control
PERFORMANCES				
Output (CFM)	100	0	1000)
Sound Level (dB)	75	i	75	
Motor	Twin N	lotor	Twin Me	otor
Venting Type	Ducted and r	ecirculating	Ducted and recirculating	
FEATURES				
Filter Style	Pro Ba		Pro Baffle	
Lighting	6 x 1.2V	V LED	4 x 1.2W LED	
Duct diameter for each motor	5 - 15/16"	(150 mm)	5 - 15/16"	(150 mm)
DIMENSIONS/WEIGHT				
Overall dim - Width	45 - 3/4"	(116 mm)	34 - 1/4"	(87 mm)
Overall dim - Height	13 - 1/8"	(33 mm)	13 - 1/8"	(33 mm)
Overall dim - Depth	18 - 1/2"	(47 mm)	18 - 1/2"	(47 mm)
Cut-out (w x d)	43 - 7/16" x 16 - 1/2"	(1092 x 419 mm)	32 - 1/16" x 16 - 1/2"	(814 x 419 mm)
Gross Weight	68 lbs	(31 kg)	60 lbs	(27 kg)
Net Weight	57 lbs	(26 kg)	51 lbs	(23 kg)
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	860W -	7.8A	860W -	7.8A
Power Cable	Nema 5	5-15P	Nema 5-	-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Frend	ch / Spanish	English / Frenc	h / Spanish

SOFIA

PROFESSIONAL HOOD





CODE ID		SIONAL HOOD 136S1	30" PROFESS F6PH30S1 -	
Series	6	00	60	00
Finish	Professional Design - S	Stainless Steel (AISI 430)	Professional Design - S	tainless Steel (AISI 430)
CONTROL PANEL				
Control Type	4 speed mec	hanical control	4 speed mech Knob Control	
PERFORMANCES				
Output (CFM)	6	00	60	00
Sound Level (dB)	7	72	7	2
Motor	0	ne	One	
Venting Type	Ducted and	recirculating	Ducted and recirculating	
FEATURES				
Filter Style	Pro	Baffle	Pro E	
Lighting	2 x 1.2W LED		2 x 1.2 4 x 1.2W LED	
Duct diameter	5 - 15/16"	(150 mm)	5 - 15/16"	(150 mm)
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 7/8"	(910 mm)	29 - 13/16"	(760 mm)
Overall dim - Height	18"	(460 mm)	18"	(460 mm)
Overall dim - Depth	24"	(610 mm)	24"	(610 mm)
Gross Weight	70 lbs	(30 kg)	61 lbs	(28 kg)
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	430W	- 3.8A	430W	- 3.8A
Power Cable	Nema	5-15P	Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Frer	nch / Spanish



SOFIA

PROFESSIONAL FRIDGE BUILT-IN FRIDGE



CODE ID	36" PROFESSIC F7PBM36S1-L F7PBM36S1-R ((LEFT DOOR)	36" BUILT- F7IBM3601-L F7IBM3601-R	
Series	700	0	70	00
Finish	Professional Design	n - Stainless Steel	Distinto - O	verlav Panel
PERFORMANCES/CAPACITY	<u> </u>			
Anual Energy Usage	\$69 (571	kWh)	\$70 (58	0 kWh)
Noise Level db	40	/		0
Fridge compartment capacity (cbft)	14.	7	14	.7
Flexzone Bottom-Drawer capacity (cbft)	3.8	3	3.	.8
FEATURES				
Fridge Compartment				
Glass Shelves	2			2
Adjustable Door Shelves	3			3
Micro shot-peened Stainless Steel Drawers	2 Low	Temp	2 Low	Temp
Flexzone Bottom-Drawer				
White Painted Drawers	1		1	
Internal Drawers	1 + 1 ic	e tray	1 + 1 ice tray	
LED lighting	•		•	
Ice Maker	•			•
Equipment				
No Frost	•			
Flexzone	•			
TruPivot hinges	•			
DIMENSIONS/WEIGHT				
Width in	35 - 3/8"	(900 mm)	35 - 3/8"	(900 mm)
Height in	83 - 1/2"	(2121 mm)	83 - 1/2"	(2121 mm)
Depth without handle in	25"	(635 mm)	24"	(610 mm)
Minimum niche height in	84"	(2134 mm)	84"	(2134 mm)
Door clearance in	57 - 7/8"	(1470 mm)	57 - 7/8"	(1470 mm)
Door opening angle	105°		10	5°
Net Weight	540 lbs (245 kg)		474 lbs	(215 kg)
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	552W -	4.8A	552W	- 4.8A
Power Cable	Nema 5	5-15P	Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Frend	ch / Spanish	English / Frer	nch / Spanish

SOFIA

PROFESSIONAL WINE CELLAR BUILT-IN WINE CELLAR



CODE ID	F7PBW24S1-L F7PBW24S1-R	. (LEFT DOOR) (RIGHT DOOR)	F7IBW24O1-L	WINE CELLAR (LEFT DOOR) (RIGHT DOOR)
Series	7(00	70	00
Finish	Professional Desig	n - Stainless Steel	Distinto - O	verlay Panel
PERFORMANCES/CAPACITY				
Noise Level db	4	1	4	1
Riserva Compartment capacity (bottles)	3	6	3	6
Wine Cellar Compartment capacity (bottles)	1	8	1	8
Flexzone Bottom-Drawer capacity (cbft)		2		2
FEATURES				
Riserva storage compartment				
Natural wood shelves	6	6	(6
Wine Cellar Compartment				
Natural wood shelves	3	3		3
Flexzone Bottom-Drawer				
White Painted Drawers	1	1		1
Internal Drawers	1	1		1
LED lighting		•		•
Glass door		•		•
Equipment				
TriplePlay Refrigeration		•		•
No Frost		•		•
Flexzone		•		•
TruPivot hinges		•		•
DIMENSIONS/WEIGHT				
Width in	23 - 5/8"	(600 mm)	23 - 5/8"	(600 mm)
Height in	83 - 1/2"	(2121 mm)	83 - 1/2"	(2121 mm)
Depth without handle in	25"	(635 mm)	24"	(610 mm)
Minimum niche height in	84"	(2134 mm)	84"	(2134 mm)
Door clearance in	46"	(1168 mm)	46"	(1168 mm)
Door opening angle	10)5°	10)5°
Net Weight	463 lbs	(210 kg)	386 lbs	(175 kg)
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	472W	- 4.1A	472W	- 4.1A
Power Cable	Nema	5-15P	Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish	English / Frei	nch / Spanish



SOFIA

INTEGRATED DISHWASHER



CODE ID	24" INTEGRATED DISHWASHER F6PDW24SS1		
	FOPDV	V24551	
Series	600		
Finish	Stainless stee	el - Interior tub	
PERFORMANCES			
Place Settings		3	
Energy Consumption (kWh / year)		65	
Water Consuption (liters / year)		60	
Sound level (dB) HIDDEN CONTROLS	C	60	
Program Selector	Grov Pue	h Buttons	
On / Off button		•	
Number of Buttons		4	
Program Gauge		ed	
Temperature		5° - 65° - 70°	
Delay Timer		1 digit 9h	
Rinse Aid Level Indicator		ght	
Acoustic Signal at End		•	
PROGRAMMES			
Wash programs	1	0	
	Rapid 27'	Normal (Energy Star)	
Program	Crystal	Extreme wash (Sanitization)	
	Daily half load		
_	Rinse	Eco quick	
Fast cycles	Light quick	Strong and fast	
	Normal quick		
ETL Sanitization listed		•	
FEATURES			
Tub Material		ss Steel	
Internal Door		ss Steel	
Lower Spray Arm		•	
Top Spray Arm			
Aquastop		ull	
Keating Element Turbidness Sensor		eating element	
		-	
Hinges Rear Foot Adjustment	Fixed Fulcrum -	Not Adjustable	
Single Load	4.0 Pros	sure switch	
Length of Inlet Hose (mm)		72	
Length of Drain Hose (mm)		70	
Water Hardness Max	100°fH		
BASKETS	100 11	,00 011	
Baskets Color	Gr	rey	
Lower Basket		•	
Upper Basket		•	
Upper Basket Adjustment	Automati	c 3 levels	
Cutlery Basket	13 se	ttings	
DIMENSIONS/WEIGHT			
Overall dim - Width	23 - 9/16"	(598 mm)	
Overall dim - Height (min - max)	33 - 13/16", 35 - 3/4"	(860 mm) - (910 mm)	
Overall dim - Depth	23 - 3/16"	(589 mm)	
Cut-out - Width	23 - 5/8"	(600 mm)	
Cut-out - Height (min)	33 - 7/8"	(860 mm)	
Cut-out - Depth (min - max)	22 - 5/8"	(575 mm)	
Gross Weight	101 lbs	(46 kg)	
POWER / RATINGS (115 V, 60 HZ)			
kW / Amps rating		V - 13A	
Power Cable	Nema	5-15P	
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish	

FULGOR MILANO

TECHNICAL DISTINTO



DATA TECHNICAL

TOUCH CONTROL OVEN







DISTINTO

TOUCH CONTROL OVEN



CODE ID	30" TOUCH CONTROL SINGLE OVEN F7SP30		
Series	700		
Series			
Finish		- Stainless Steel - Black Glass	
		- White Glass	
CONTROL PANEL			
Control Type		onic Touch Control	
Display: Clock - Temperature - Function		3.5"	
Language		rench / Spanish / Italian / German	
	Control Interface Full Touch: Functions -	Chime Volume Setting	
	Recipes - Settings Menu	Date Format	
	Brightness Setting	Demo Mode	
OVEN			
Туре	Dual True	Convection	
Temperature Regulation	Electronic Control (min/m	nax 170/550°F - 75/290°C)	
OVEN FUNCTIONS			
	Pyrolytic Self-Clean	Broil	
	True Convection	Dehydrate	
	Convection Broil Convection Roast	Thaw (Defrost) Proof (Warm)	
	Pizza (Lower Convection)	Keep warm (Warm Plus)	
	Bake	Oven Lights	
ELECTRIC OVEN FEATURES		- Cron Lights	
	Preset default temperature	Display instantaneous temperature	
	Child Door Lock	Control Display Lock	
	Sabbath Mode	12/24 Hour Clock Formats	
	Automatic Fast Preheat	Temperature Display °C/°F	
	Meat Probe	Event Logs (for Service)	
DVEN DOOR(S) Dven Glass Window	Larga Saa T	hrough Glass	
Door Cooling System		nrougn Glass stant Glasses	
Door Hinges		y Steady Tilt	
OVEN CAVITY			
Gross Capacity (cbft)	4	1.4	
Jsable Capacity (cbft)		4.1	
Cavity Enamel Color		ack	
Rack Positions		6	
Dven Lights IEATING ELEMENTS (@240V)	3x20W	Halogen	
Broil Upper Heating Element	2	500 W	
Jpper Auxiliary Element		032 W	
Concealed Bake Lower Heating Element		000 W	
Convection Element	-	300 W	
OVEN ACCESSORIES			
Chromed Racks		2	
nameled Broiler Pan (basin + anti splash)		1	
		1	
DIMENSIONS/WEIGHT	00 44/40	(754 mm)	
Overall dim - Width Overall dim - Height	<u>29 - 11/16"</u> 27 - 7/8"	(754 mm) (707 mm)	
Overall dim - Depth	21 - 1/8 24"	(610 mm)	
Cut-out - Width	24 28 - 7/16"	(722 mm)	
Cut-out - Height (min)	27 - 3/8"	(695 mm)	
Cut-out - Depth (min)	23 - 1/4"	(590 mm)	
Gross Weight	183 lbs	(83 kg)	
POWER / RATINGS (208/240 V, 60 HZ)			
W / Amps rating at 120-240V, 60Hz		V - 15.4A	
kW / Amps rating at 120-208V, 60Hz		V - 16.8A	
Power Cable NSTRUCTIONS FOR USE	Col	nduit	
	E-statute	nch / Spanish	
Use & Care Manual / Installation Manual	English / French / Spanish		

CODE ID	30" TOUCH CONTROL DOUBLE OVEN F7DP30		
Series	700		
	S1 - Stainless Steel		
Finish	B1 - Black Glass		
	W1 - White Glass		
CONTROL PANEL			
Control Type	Creactive Electronic Touch Control		
Display: Clock - Temperature - Function	TFT	3.5"	
Language	English (USA) / English (UK) / Fre	ench / Spanish / Italian / German	
	Control Interface	Chime Volume Setting	
	Full Touch: Functions -	Date Format	
	Recipes - Settings Menu	Date i offiat	
	Brightness Setting	Demo Mode	
OVEN			
Туре	Dual True (
Temperature Regulation	Electronic Control (min/m	ax 170/550°F - 75/290°C)	
OVEN FUNCTIONS			
	Pyrolytic Self-Clean	Broil	
	True Convection	Dehydrate	
	Convection Broil	Thaw (Defrost)	
	Convection Roast	Proof (Warm)	
	Pizza (Lower Convection)	Keep warm (Warm Plus)	
	Bake	Oven Lights	
ELECTRIC OVEN FEATURES			
	Preset default temperature	Display instantaneous temperature	
	Child Door Lock	Control Display Lock	
	Sabbath Mode	12/24 Hour Clock Formats	
	Automatic Fast Preheat	Temperature Display °C/°F	
	Meat Probe (Upper Oven Only)	Event Logs (for Service)	
OVEN DOOR(S)			
Oven Glass Window	Large See Through Glass		
Door Cooling System	4 Heat Resistant Glasses		
Door Hinges	Heavy Duty Steady Tilt		
OVEN CAVITY			
Gross Capacity (cbft)	4.4		
Usable Capacity (cbft) Cavity Enamel Color	4.1 Black		
Rack Positions		3 5	
Oven Lights			
HEATING ELEMENTS (@240V)	3x20W	nalogen	
Broil Upper Heating Element	31	500 W	
Upper Auxiliary Element		032 W	
Concealed Bake Lower Heating Element		000 W	
Convection Element			
OVEN ACCESSORIES	2 × 10		
Chromed Racks	2)	
Enameled Broiler Pan (basin + anti splash)	-		
Telescopic Chromed Rack		1	
DIMENSIONS/WEIGHT			
Overall dim - Width	29 - 11/16"	(754 mm)	
Overall dim - Height	50 - 13/16"	(1290 mm)	
Overall dim - Depth	24"	(610 mm)	
Cut-out - Width	28 - 7/16"	(722 mm)	
Cut-out - Height (min)	50"	(1270 mm)	
Cut-out - Depth (min)	23 - 1/4"	(590 mm)	
Gross Weight	326 lbs	(148 kg)	
POWER / RATINGS (208/240 V, 60 HZ)			
kW / Amps rating at 120-240V, 60Hz	7.50kW	- 31.2A	
kW / Amps rating at 120-208V, 60Hz		- 30.3A	
Power Cable		duit	
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	Fnalish / Frer	nch / Spanish	
cool a caro manaar/ motanation manaar		ion, opanion	





OVEN 400



CODE ID	30" OV	EN 400	
	F4SP30S1		
Series	4(00	
Finish	Stainles	s Steel	
CONTROL PANEL	Otamot		
Control Type	Elect	ronic	
Display: Clock - Temperature - Timer	Red		
Language	Enc		
OVEN	23		
Туре	True Co	avection	
Temperature Regulation	Electronic Control (min/m		
OVEN FUNCTIONS			
	Pyrolytic Self-Clean	Bake	
	True Convection	Broil	
	Convection Bake	Thaw (Defrost)	
	Convection Broil	Oven Lights	
	Convection Roast		
ELECTRIC OVEN FEATURES	Controlation		
	Temperature	Display °C/°F	
OVEN DOOR(S)			
Oven Glass Window	Large See Through Glass		
Door Cooling System	4 Heat Resis	tant Glasses	
Door Hinges	Heavy Duty	Steady Tilt	
OVEN CAVITY			
Gross Capacity (cbft)	4	4	
Usable Capacity (cbft)	4	1	
Cavity Enamel Color	Bla	ick	
Rack Positions	(3	
Oven Lights	3x20W	Halogen	
HEATING ELEMENTS (@240V)			
Broil Upper Heating Element	310	0 W	
Upper Auxiliary Element	103	2 W	
Lower Auxiliary Element	600) W	
Concealed Bake Lower Heating Element	140	0 W	
Convection Element	250	0 W	
OVEN ACCESSORIES			
Chromed Racks	2	2	
Enameled Broiler Pan (basin + anti splash)	-		
Telescopic Chromed Rack	Opti	onal	
DIMENSIONS/WEIGHT			
Overall dim - Width	29 - 11/16"	(754 mm)	
Overall dim - Height	27 - 7/8"	(707 mm)	
Overall dim - Depth	24 ["]	(610 mm)	
Cut-out - Width	28 - 7/16"	(722 mm)	
Cut-out - Height (min)	27 - 1/4"	(692 mm)	
Cut-out - Depth (min)	23 - 1/4"	(590 mm)	
Gross Weight	181 lbs	(82 kg)	
POWER / RATINGS (208/240 V, 60 HZ)			
kW / Amps rating at 120-240V, 60Hz	3.70kW		
kW / Amps rating at 120-208V, 60Hz	3.49kW		
Power Cable	Con	duit	
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish	

DISTINTO

WARMING DRAWER

CODE ID	30" WARMING DRAWER F7DWD30S1		30" WARMING DRAWER F7IWD3001	
Туре	Warmi	ng Drawer	Warming	g Drawer
Front finish	Stain	less Steel	Ove	rlay
Internal shelf		Inox	In	DX XC
Compatible with ovens	F75P30S1 - F7D	DP30S1 - F4SP30S1	F75P30S1 - F7DP	30S1 - F4SP30S1
PERFORMANCE				
Maximum temperature	194°	°F / 90°C	194°F	/ 90°C
Cooking at low temperature (slow cooking)		•		•
Leavening		•		,
Heating dishes and food		•		•
Slow close assistance		-		
Open / Close push - pull system		•)
CONTROL				
Thermostat	86°F - 194°F / 30°C - 90°C		86°F - 194°F	/ 30°C - 90°C
Fan assisted		•	•	
Function Indicator / Thermostat on/off	•		•	
SAFETY				
Safety front		•	•	
ELECTRICAL SPECIFICATIONS				
Max power absorbed (W)	1	100W	1100W	
Power (V-Hz)	1:	20/60	120/60	
Power cord		•	•	
Plug		•		•
CAPACITY				
Volume (cbft-litri)	2,1	61.4	2,1	61.4
DIMENSIONS				
Overall dim - Width	29 - 5/8"	(754 mm)	29 5/8" to 29 7/8"	(754mm to 758 mm)
Overall dim - Height	10 3/8"	(264 mm)	10 3/8"	(264 mm)
Overall dim - Depth	23"	(583 mm)	23"	(583 mm)
Door Depth with Overlay	15/16"	(24 mm)	7/8"	(22 mm)
Cut-out - Width	28 7/16"	(722 mm)	28 7/16"	(722 mm)
Cut-out - Height	9 1/4"	(235 mm)	9 1/4"	(235 mm)
Cut-out - Depth	24"	(610 mm)	24"	(610 mm)
WEIGHT				
Net Weight	67.2 lbs	30.5 Kg	62.8 lbs	28.5 Kg
Gross Weight	74.1 lbs	33.6 Kg	69.7 lbs	31.6 Kg





MULTIFUNCTION SELF-CLEAN OVEN





CODE ID		N SELF-CLEAN OVEN P30S1		N SELF-CLEAN OVEN P24S2
Series	1	00	100	
Finish		ess Steel	-	ss Steel
CONTROL PANEL	Otanic		Otamic	33 01001
Control Type	Elec	tronic	Flec	tronic
Display: Clock - Timer - Temperature		d LED		I LED
		glish		glish
OVEN		gion		91011
Туре	Elec	tronic	Flec	tronic
1900		ic Control		ic Control
Temperature Regulation		85°F - 50/250°C)		85°F - 50/250°C)
OVEN FUNCTIONS	((
OVEN FONCTIONS	Pyrolytic Self-Clean	Bake	Pyrolytic Self-Clean	Bake
	True Convection	Thaw (Defrost)	True Convection	Thaw (Defrost)
	Convection Bake	Oven Lights	Convection Bake	Oven Lights
	Convection Broil	Broil	Convection Broil	Broil
	Convection Bron		Convection Broin	
GAS OVEN FEATURES	Convection Roast		Convection Roast	I
CAS OVEN PEATONES	Temperatur	re Display °C/°F	Temporatur	e Display °C/°F
OVEN DOOR(S)	remperatu	e Display 0/ F	Temperatur	e Display 0/ 1°
Oven Glass Window	Large See Through Glass		Large See T	brough Glass
Door Cooling System	4 Heat Resistant Glasses		Large See Through Glass 4 Heat Resistant Glasses	
Door Hinges		y Steady Tilt		
Handle Style		ar Steel	Heavy Duty Steady Tilt Tubular Steel	
OVEN CAVITY	Tubul	ar Steer	Tubula	ar Steel
Gross Capacity (cbft)		2.0		0.6
		3.0	2.6	
Usable Capacity (cbft)		2.8	2.4	
Cavity Enamel Color	В	lack	Black 5	
Rack Positions	0001	4		-
Oven Lights	2X2UVV	Halogen	1x20W	Halogen
HEATING ELEMENTS (@240V)		100.14/		200.14/
Broil Upper Heating Element		100 W		200 W
Upper Auxiliary Element		032 W		000 W
Lower Auxiliary Element		600 W		
Concealed Bake Lower Heating Element Convection Element		400 W	1100 W	
	2	500 W	2	300 W
OVEN ACCESSORIES				2
Chromed Racks	2			2
Enameled Broiler Pan (basin + anti splash)		1		1
Telescopic Chromed Rack DIMENSIONS/WEIGHT	Up	tional	Opt	ional
	00 0/01	(745	00.0/01	(504
Overall dim - Width	29 - 3/8"	(745 mm)	23 - 3/8" 23 - 3/8"	(594 mm)
Overall dim - Height	23 - 3/16"	(589 mm)		(594 mm)
Overall dim - Depth	22 - 1/16"	(560 mm)	21 - 7/8"	(556 mm)
Cut-out - Width	28"	(710 mm)	22 - 1/16"	(560 mm)
Cut-out - Height (min)	23"	(585 mm)	23"	(585 mm)
Cut-out - Depth (min)	24"	(610 mm)	22 - 1/16"	(560 mm)
Gross Weight	148 lbs	(67 kg)	90 lbs	(41 kg)
POWER / RATINGS (208/240 V, 60 HZ)		45.04		40.04
kW / Amps rating at 120-240V, 60Hz		V - 15.6A		/ - 13.9A
kW / Amps rating at 120-208V, 60Hz		V - 17.4A		/ - 12.3A
Power Cable	Со	nduit	Сог	nduit
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish	English / Fre	nch / Spanish

DISTINTO

MULTIFUNCTION EASY-CLEAN OVEN



CODE ID	30" MULTIFUNCTION EASY-CLEAN OVEN F1SM30S1			24" MULTIFUNCTION EASY-CLEAN OVEN F1SM24S2	
Series	1	00	100		
Finish	Stainle	ess Steel	Stainle	ss Steel	
CONTROL PANEL					
Control Type	2 Knobs	/6 Buttons	2 Knobs/	3 Buttons	
Display: Clock - Timer	Rec	LED		LED	
OVEN					
Туре	Elec	tronic	Elec	tronic	
Temperature Regulation		nanical Control 540°F - 50/285°C)		anical Control 80°F - 50/250°C)	
OVEN FUNCTIONS			<u> </u>		
	Convection Bake	Thaw (Defrost)	True Convection	Bake	
-	Convection Broil	Lower Bake	Convection Bake	Oven Lights	
	Convection Roast	Oven Lights	Convection Broil	Broil	
	Pizza (Lower Convection)	Broil	Convection Broast	2101	
	Bake				
OVEN DOOR(S)		1		1	
Oven Glass Window	Large See T	hrough Glass	Large See T	hrough Glass	
Door Cooling System		stant Glasses		stant Glasses	
Door Hinges					
Handle Style	Heavy Duty Steady Tilt Tubular Steel		Heavy Duty Steady Tilt Tubular Steel		
OVEN CAVITY	Tubu				
Gross Capacity (cbft)	3.0		2.6		
Usable Capacity (cbft)		2.8	2.4		
Cavity Enamel Color		lack	Black		
Back Positions		4	5		
Oven Lights		Halogen		Halogen	
HEATING ELEMENTS (@240V)	Litte of the			lalogon	
Broil Upper Heating Element	3100 W		1	200 W	
Upper Auxiliary Element		032 W		000 W 000	
Lower Auxiliary Element		-		-	
Concealed Bake Lower Heating Element	2	2100 W	1100 W		
Convection Element		-	2300 W		
OVEN ACCESSORIES					
Chromed Racks		2		2	
Enameled Broiler Pan (basin + anti splash)		sin only)		<u>-</u> 1	
Telescopic Chromed Rack	· · · · ·	-		ional	
DIMENSIONS/WEIGHT			Opt		
Overall dim - Width	29 - 3/8"	(745 mm)	23 - 3/8"	(594 mm)	
Overall dim - Height	23 - 3/16"	(589 mm)	23 - 3/8"	(594 mm)	
Overall dim - Depth	22 - 1/16"	(560 mm)	21 - 7/8"	(556 mm)	
Cut-out - Width	28"	(710 mm)	21 - 1/16"	(560 mm)	
Cut-out - Height (min)	23"	(585 mm)	22 - 1/10	(585 mm)	
Cut-out - Depth (min)	23	(610 mm)	22 - 1/16"	(560 mm)	
Gross Weight	148 lbs		90 lbs		
POWER / RATINGS (208/240 V, 60 HZ)	140 IUS	(67 kg)	30 05	(41 kg)	
kW / Amps rating at 120-240V, 60Hz	3 6014W	V - 15.6A	0.051//	/ - 9.8A	
kW / Amps rating at 120-208V, 60Hz		V - 13.7A		/ - 8.6A	
Power Cable INSTRUCTIONS FOR USE	Co	nduit	Cor	nduit	
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish	English / Fre	nch / Spanish	





GAS COOKTOP





DISTINTO

GAS COOKTOP



CODE ID	44" GAS COOKTOP F4GK42S1			COOKTOP K36S1
Series	4	00	4	00
Finish	Stainle	ss Steel	Stainle	ss Steel
CONTROL PANEL				
Control Type	Kn	obs	Kn	obs
СООКТОР				
Туре	GAS (N	G or LP)	GAS (N	G or LP)
Cooking Surface	Matte Bla	ck Enamel	Matte Bla	ck Enamel
GAS COOKTOP FEATURES				
Electric Re-ignition system		•		•
Flame-out sensing		•		•
Dual Flame Burner		•		•
Simmer Plate	Opt	ional	Opt	ional
Small Pot Insert (for single burners only)	Opt	ional	Opt	ional
Wok Ring (for dual burner only)	Optional		Opt	ional
Heavy Duty Cast Iron Grates	4		3	
Cooking Zones	4		5	
Burners types	Sealed Burners (all) - Dual Flame/Simmer Burner (only Left)		t) Sealed Burners (all) - Dual Flame/Simmer Burner (only Cent	
Power (Max/Min) (Left)	18000 (BTU/h) - 5275W	/ 700 (BTU/h) - 205W	-	
Power (Max/Min) (Front-L)		-	6300 (BTU/h) - 1850W / 1300 (BTU/h) - 380W	
Power (Max/Min) (Rear-L)		-	9000 (BTU/h) - 2640W / 1300 (BTU/h) - 380W	
Power (Max/Min) (L Center)	4000 (BTU/h) - 1175W /	1000 (BTU/h) - 295W	-	
Power (Max/Min) (Front Center)		-	18000 (BTU/h) - 5275W / 700 (BTU/h) - 205W	
Power (Max/Min) (R Center)	9000 (BTU/h) - 2640W	/ 1300 (BTU/h) - 380W	-	
Power (Max/Min) (Front-R)		-	4000 (BTU/h) - 1175W / 1000 (BTU/h) - 295W	
Power (Max/Min) (Rear-R)		-	12000 (BTU/h) - 3520W / 2200 (BTU/h) - 645W	
Power (Max/Min) (Right)	15000 (BTU/h) - 4400W	/ 2700 (BTU/h) - 790W	-	
DIMENSIONS/WEIGHT				
Overall dim - Width	44"	(1120 mm)	36"	(910 mm)
Overall dim - Height	5 - 3/16"	(132 mm)	5 - 3/16"	(132 mm)
Overall dim - Depth	16 - 3/4"	(425 mm)	20 - 1/16"	(510 mm)
Cut-out - Width (min - max)	43 - 1/8", 43 - 1/4"	(1096 mm) - (1099 mm)	34 - 7/8", 35"	(886 mm) - (889 mm)
Cut-out - Height (min)	2 - 15/16"	(74 mm)	2 - 15/16"	(74 mm)
Cut-out - Depth (min - max)	15 - 15/16", 16 - 1/16"	(405 mm) - (408 mm)	19 - 5/16", 19 - 3/8"	(490 mm) - (493 mm)
Gross Weight	45 lbs	(20 kg)	55 lbs	(25 kg)
POWER / RATINGS (120 V, 60 HZ)				
Amps	0.1A			1A
Max Power	46000 (BTU/h) - 13475W			/h) - 15320W
Power Cable	Nema	5 - 15P	Nema	5 - 15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Frei	nch / Spanish	English / Frei	nch / Spanish

CODE ID	30" GAS COOKTOP F4GK30S1		24" GAS COOKTOP F4GK24S1	
Series	4	00	4	00
Finish	Stainle	ess Steel	Stainle	ss Steel
CONTROL PANEL				
Control Type	Kr	iobs	Kn	obs
COOKTOP				
Туре	GAS (N	IG or LP)	GAS (N	G or LP)
Cooking Surface	Matte Bla	ack Enamel	Matte Bla	ck Enamel
GAS COOKTOP FEATURES				
Electric Re-ignition system		•		•
Flame-out sensing		•		•
Dual Flame Burner		•		•
Simmer Plate	Opt	tional	Opt	ional
Small Pot Insert (for single burners only)	Opt	tional	Opt	ional
Wok Ring (for dual burner only)	Optional		-	
Heavy Duty Cast Iron Grates	2		4	
Cooking Zones	5		4	
Burners types	Sealed Burners (all) - Dual Fl	ame/Simmer Burner (only Left)	Sealed Burners (all) - Dual Flame/Simmer Burner (only Front	
Power (Max/Min) (Left)	18000 (BTU/h) - 5275W	/ 700 (BTU/h) - 205W		-
Power (Max/Min) (Front-L)		-	18000 (BTU/h) - 5275W	/ 700 (BTU/h) - 205W
Power (Max/Min) (Rear-L)		-	6300 (BTU/h) - 1850W	/ 1300 (BTU/h) - 380W
Power (Max/Min) (Front Center)	4000 (BTU/h) - 1175W	/ 1000 (BTU/h) - 295W		-
Power (Max/Min) (Rear Center)	12000 (BTU/h) - 3520W	/ 2200 (BTU/h) - 645W	-	
Power (Max/Min) (Front-R)	6300 (BTU/h) - 1850W / 1300 (BTU/h) - 380W		4000 (BTU/h) - 1175W	/ 1000 (BTU/h) - 295W
Power (Max/Min) (Rear-R)	9000 (BTU/h) - 2640W	/ 1300 (BTU/h) - 380W	12000 (BTU/h) - 3520W	/ 2200 (BTU/h) - 645W
DIMENSIONS/WEIGHT				
Overall dim - Width	30"	(760 mm)	24 - 1/2"	(620 mm)
Overall dim - Height	5 - 3/16"	(132 mm)	5 - 3/16"	(132 mm)
Overall dim - Depth	20 - 1/16"	(510 mm)	20 - 1/16"	(510 mm)
Cut-out - Width (min - max)	29", 29 - 1/8"	(737 mm) - (740 mm)	23 - 1/2", 23 - 5/8"	(597 mm) - (600 mm)
Cut-out - Height (min)	2 - 15/16"	(74 mm)	2 - 15/16"	(74 mm)
Cut-out - Depth (min - max)	19 - 5/16", 19 - 3/8"	(490 mm) - (493 mm)	19 - 5/16", 19 - 3/8"	(490 mm) - (493 mm)
Gross Weight	45 lbs	(20 kg)	41 lbs	(19 kg)
POWER / RATINGS (120 V, 60 HZ)				
Amps	0.1A		0.	1A
Max Power	49300 (BTU	l/h) - 14440W	40300 (BTU	/h) - 11800W
Power Cable	Nema	5 - 15P	Nema	5 - 15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish	English / Fre	nch / Spanish





INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM



CODE ID	36" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM F7IT36S1			
Series		70	0	
Finish		Ceramic glass with	n aluminum frame	
CONTROL PANEL				
Control Type		Touch (Control	
COOKTOP				
Туре		INDUC	TION	
Cooking Surface		Ceramie	c Glass	
Slider Touch Control for Power Setting		•	1	
Digital Display for Power Level		•		
INDUCTION COOKTOP FEATURES				
Pot Detection System		•		
Bridge double zone		•		
Power Levels		1 to	9	
Warming Function 158°F / 70°C	•			
Booster/Fast Boil Function for Each Zone	•			
Auto-boil and Reduce for Each Zone	•			
Residual Heat Indication	•			
Individual Timer for each Zone		•		
Child Lock		•		
Key Lock (LED)		•		
Pause/recall (LED)		•		
General ON/OFF Key (LED)		•		
Cooking Zones		5	j	
Burners types (Front-L) - Power (Max/Booster)	Inductor	11"	(280 mm)	2300W / 3600W
Burners types (Rear Central) - Power (Max/Booster)	Inductor	7"	(180 mm)	1850W / 3000W
Burners types (Front Central) - Power (Max/Booster)	Inductor	5 - 3/4"	(145 mm)	1400W / 2200W
Burners types (Rear/Front-R) - Power (Max/Booster)	(Octagonal) Inductor	7 - 1/2" x 8 - 1/2"	(190 mm x 220 mm)	2000W / 3600W
DIMENSIONS/WEIGHT				
Overall dim - Width		36 - 3/16"	(919 mm)	
Overall dim - Height		4"	(100 mm)	
Overall dim - Depth		21 - 3/16"	(538 mm)	
Cut-out - Width (Tolerance)		34 - 5/8" tol. 1/16"	(879 mm) - (tol. 1 mm)	
Cut-out - Height		2 - 5/8" + conduit 1 - 1/16"	(67 mm) + conduit (27	,
Cut-out - Depth (Tolerance)	19 - 3/8" tol. 1/16" (492 mm) - (tol. 1 mm)			
Gross Weight	55 lbs (25 kg)			
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz		10.8 kV		
kW / Amps rating at 208V, 60Hz	9.4 kW - 45A			
Power Cable		Con	duit	
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual		English / Fren	ich / Spanish	

DISTINTO

INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM

CODE ID	30" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM F7IT30S1			
Series	7	700		
Finish	Ceramic glass w	ith aluminum frame		
CONTROL PANEL				
Control Type	Touch	Control		
СООКТОР				
Туре	INDU	ICTION		
Cooking Surface	Ceram	ic Glass		
Slider Touch Control for Power Setting		•		
Digital Display for Power Level		•		
INDUCTION COOKTOP FEATURES				
Pot Detection System		•		
Power Levels	1	to 9		
Warming Function 158°F / 70°C		•		
Booster/Fast Boil Function for Each Zone		•		
Auto-boil and Reduce for Each Zone	•			
Residual Heat Indication	•			
Individual Timer for each Zone	•			
Child Lock		•		
Key Lock (LED)		•		
Pause/recall (LED)		•		
General ON/OFF Key (LED)		•		
Cooking Zones		4		
Burners types (Front-L) - Power (Max/Booster)	Inductor 11"	(280 mm)	2300W / 3600W	
Burners types (Rear Central) - Power (Max/Booster)	Inductor 7"	(180 mm)	1850W / 3000W	
Burners types (Rear-R) - Power (Max/Booster)	Inductor 5 - 3/4"	(145 mm)	1400W / 2200W	
Burners types (Front-R) - Power (Max/Booster)	Inductor 7"	(180 mm)	1850W / 3000W	
DIMENSIONS/WEIGHT				
Overall dim - Width	30 - 3/8"	(771 mm)		
Overall dim - Height	4"	(100 mm)		
Overall dim - Depth	21 - 3/16"	(538 mm)		
Cut-out - Width (Tolerance)	28 - 3/4" tol. 1/16"	(730 mm) - (tol.	1 mm)	
Cut-out - Height	2 - 5/8" + conduit 1 - 1/16"	(67 mm) + condu	uit (27 mm)	
Cut-out - Depth (Tolerance)	19 - 7/16" tol. 1/16"	(494 mm) - (tol.	1 mm)	
Gross Weight	40 lbs (18 kg)			
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz	7.2 kW - 30A			
kW / Amps rating at 208V, 60Hz	6.45 k	W - 31A		
Power Cable	Co	nduit		
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish		



RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM



CODE ID	36" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM F6RT36S2				
Series		600			
Finish	Ceramic glas	s with aluminum frame			
CONTROL PANEL					
Control Type	Tc	ouch Control			
СООКТОР					
Туре		RADIANT			
Cooking Surface	Ce	eramic Glass			
RADIANT COOKTOP FEATURES					
Power Setting	Peacock	Slider Touch Control			
Digital Display for Power Level		5			
Low Power Scale for Delicate Cooking		•			
Control Display Lock		•			
Automatic Fast Boil Function	•				
Hot Surface Indication	•				
Timer Functions	1+5				
Timer Display	•				
Acoustic Buzzer	•				
Failure Codes Indication		•			
Cooking Zones		5			
Burners types (Front/Rear-L) - Power	7"	(180 mm)	1800W		
Bridge Element - Power			800W		
Burners types (Central) - Power	9"/7"/5"	(230 mm / 180 mm / 127 mm)	2500W / 1600W / 800W		
Burners types (Rear-R) - Power	7"	(180 mm)	1800W		
Burners types (Front-R) - Power	6"	(153 mm)	1200W		
DIMENSIONS/WEIGHT					
Overall dim - Width	36 - 3/16"	(919 mm)			
Overall dim - Height	3 - 5/16" + conduit 15/16"	(84 mm) + conduit (24 mm)			
Overall dim - Depth	21 - 3/16"	(538 mm)			
Cut-out - Width (min - max)	34 - 1/16", 34 - 5/16"	(865 mm) - (872 mm)			
Box - Height	3 - 1/16" + conduit 15/16"	(78 mm) + conduit (24 mm)			
Cut-out - Depth (min - max)	19 - 1/4", 19 - 5/8" (490 mm) - (498 mm)				
Gross Weight	44 lbs (20 kg)				
POWER / RATINGS (208/240 V, 60 HZ)					
kW / Amps rating at 240V, 60Hz	9.90kW - 41.3A				
kW / Amps rating at 208V, 60Hz	7.44kW - 35.8A				
Power Cable		Conduit			
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English	/ French / Spanish			

DISTINTO

RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM

CODE ID	30" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM F6RT30S2				
Series		600			
Finish	Ceramic glas	ss with aluminum frame			
CONTROL PANEL					
Control Type	Та	ouch Control			
COOKTOP					
Туре		RADIANT			
Cooking Surface	C	eramic Glass			
RADIANT COOKTOP FEATURES					
Power Setting	Peacock	Slider Touch Control			
Digital Display for Power Level		4			
Low Power Scale for Delicate Cooking		•			
Control Display Lock		•			
Automatic Fast Boil Function	•				
Hot Surface Indication	•				
Timer Functions	1+4				
Timer Display		•			
Acoustic Buzzer		•			
Failure Codes Indication		•			
Cooking Zones		4			
Burners types (Front-L) - Power	6"	(153 mm)	1200W		
Burners types (Rear-L) - Power	9"/7"/5"	(230 mm / 180 mm / 127 mm)	2500W / 1600W / 800W		
Burners types (Rear-R) - Power	8"/5"	(203 mm / 127 mm)	2200W / 800W		
Burners types (Front-R) - Power	6"	(153 mm)	1200W		
DIMENSIONS/WEIGHT					
Overall dim - Width	30 - 3/8"	(771 mm)			
Overall dim - Height	3 - 5/16" + conduit 15/16"	(84 mm) + conduit (24 mm)			
Overall dim - Depth	21 - 3/16"	(538 mm)			
Cut-out - Width (min - max)	28 - 11/16", 28 - 15/16"	(729 mm) - (735 mm)			
Box - Height	3 - 1/16" + conduit 15/16"	(78 mm) + conduit (24 mm)			
Cut-out - Depth (min - max)	19 - 1/4", 19 - 5/8"	(490 mm) - (498 mm)			
Gross Weight	36 lbs	(16 kg)			
POWER / RATINGS (208/240 V, 60 HZ)					
kW / Amps rating at 240V, 60Hz	7.10kW - 29.6A				
kW / Amps rating at 208V, 60Hz	5.33kW - 25.6A				
Power Cable	Conduit				
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	Enalish	/ French / Spanish			



RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM



DISTINTO

INSERT HOOD



CODE ID	24" RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM F3RK24S2				
Series		300			
Finish	Ceramic glas	ss with aluminum frame			
CONTROL PANEL					
Control Type		Knobs			
COOKTOP					
Туре		RADIANT			
Cooking Surface	Ce	eramic Glass			
RADIANT COOKTOP FEATURES					
Power Setting	9 Levels				
Digital Display for Power Level	-				
Hot Surface Indication	•				
Cooking Zones	4				
Burners types (Front-L) - Power	7 - 3/4" / 4 - 3/4"	(197 mm / 121 mm)	1900W / 800W		
Burners types (Rear-R) - Power	5 - 1/2"	(140 mm)	1200W		
Burners types (Front-R - Rear-L) - Power	7"	(180 mm)	1800W		
DIMENSIONS/WEIGHT					
Overall dim - Width	24"	(618 mm)			
Overall dim - Height	3 - 5/16" + conduit 15/16"	(84 mm) + conduit (24 mr	n)		
Overall dim - Depth	21 - 3/16"	(538 mm)			
Cut-out - Width (min - max)	22 - 5/8", 22 - 13/16"	(574 mm) - (580 mm)			
Box - Height	3 - 1/16" + conduit 15/16"	(78 mm) + conduit (24 mr	n)		
Cut-out - Depth (min - max)	19 - 1/4", 19 - 9/16"	(490 mm) - (497 mm)			
Gross Weight	30 lbs	(14 kg)			
POWER / RATINGS (208/240 V, 60 HZ)					
kW / Amps rating at 240V, 60Hz		10kW - 25.4A			
kW / Amps rating at 208V, 60Hz	4.58kW - 22.0A				
Power Cable	Conduit				
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English	/ French / Spanish			

CODE ID	34" INSERT HOOD F6BP34S1		28" INSERT HOOD F4BP28S1	
Series	60	0	40	00
Finish	Insert - Stai	nless Steel	Insert - Sta	inless Steel
CONTROL PANEL				
Control Type	4 speed mech	anical control	4 speed mech	nanical control
PERFORMANCES	-			
Output (CFM)	60	0	60	00
Sound Level (dB)	69	9	6	9
Motor	Or	ie	OI	ne
Venting Type	Ducted and recirculating		Ducted and recirculating	
FEATURES				
Filter Style	Pro B	affle	Baffle	
Lighting	2 x 1.2	W LED	2 x 1.2W LED	
Duct diameter	5 - 15/16"	(150 mm)	5 - 15/16"	(150 mm)
DIMENSIONS/WEIGHT				
Overall dim - Width	34 - 1/4"	(870 mm)	28 - 3/8"	(720 mm)
Overall dim - Height	13 - 1/8"	(330 mm)	10 - 5/8"	(270 mm)
Overall dim - Depth	18 - 1/2"	(470 mm)	15 - 3/4"	(400 mm)
Cut-out (w x d)	32 - 1/16" x 16 - 1/2"	(814 mm x 419 mm)	26 - 1/8" x 14 - 1/4"	(664 mm x 362 mm)
Gross Weight	51 lbs	(23 kg)	33 lbs	(15 kg)
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	430W	- 3.8A	430W - 3.8A	
Power Cable	Nema 5-15P		Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fren	ch / Spanish	English / Frer	nch / Spanish

DISTINTO

UNDERCABINET HOOD



CODE ID	36" UNDERCABINET HOOD F4UC36S1		30" UNDERCABINET HOOD F4UC30S1	
Series	40	0	40	00
Finish	Undercabinet - S	Stainless Steel	Undercabinet -	Stainless Steel
CONTROL PANEL				
Control Type	4 speed pushb	utton control	4 speed push	button control
PERFORMANCES				
Output (CFM)	45	D	45	50
Sound Level (dB)	69		6	9
Motor	One		One	
Venting Type	Ducted and recirculating		Ducted and recirculating	
FEATURES				
Filter Style	Baf	le	Bat	ffle
Lighting	2 x 1.2W LED		2 x 1.2W LED	
Duct diameter	5 - 15/16"	(150 mm)	5 - 15/16"	(150 mm)
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 7/8"	(910 mm)	29 - 13/16"	(760 mm)
Overall dim - Height	10 - 1/4"	(260 mm)	18"	(460 mm)
Overall dim - Depth	21 - 1/8"	(535 mm)	24"	(610 mm)
Gross Weight	46 lbs	(21 kg)	61 lbs	(28 kg)
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	430W - 3.8A		430W - 3.8A	
Power Cable	Nema 5-15P		Nema 5-15P	
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish		English / French / Spanish	



BUILT-IN FRIDGE



CODE ID	36" BUILT-IN FRIDGE F7IBM3601-L (LEFT DOOR) F7IBM3601-R (RIGHT DOOR)		
Series	70	0	
Finish	Distinto - Ov	erlay Panel	
PERFORMANCES/CAPACITY			
Annual Energy Usage	\$70 (580	0 kWh)	
Noise Level db	40)	
Fridge compartment capacity (cbft)	14.	7	
Flexzone Bottom-Drawer capacity (cbft)	3.8	8	
FEATURES			
Fridge Compartment			
Glass Shelves	2		
Adjustable Door Shelves	3		
Micro shot-peened Stainless Steel Drawers	2 Low Temp		
Flexzone Bottom-Drawer			
White Painted Drawers	1		
Internal Drawers	1 + 1 ic	e tray	
LED lighting	•		
Ice Maker	•		
Equipment			
No Frost	•		
Flexzone	•	•	
TruPivot hinges	•	•	
DIMENSIONS/WEIGHT			
Width in	35 - 3/8"	(900 mm)	
Height in	83 - 1/2"	(2121 mm)	
Depth without handle in	24"	(610 mm)	
Minimum niche height in	84"	(2134 mm)	
Door clearance in	57 - 7/8"	(1470 mm)	
Door opening angle	105°		
Net Weight	474 lbs (215 kg)		
POWER / RATINGS (115 V, 60 HZ)			
Watts / Amps	552W - 4.8A		
Power Cable	Nema 5-15P		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		

DISTINTO

BUILT-IN WINE CELLAR

CODE ID	24" BUILT-IN WINE CELLAR F7IBW2401-L (LEFT DOOR) F7IBW2401-R (RIGHT DOOR)	
Series	700)
Finish	Distinto - Ove	erlay Panel
PERFORMANCES/CAPACITY		
Noise Level db	41	
Riserva Compartment capacity (bottles)	36	
Wine Cellar Compartment capacity (bottles)	18	
Flexzone Bottom-Drawer capacity (cbft)	2	
FEATURES		
Riserva storage compartment		
Natural wood shelves	6	
Wine Cellar Compartment		
Natural wood shelves	3	
Flexzone Bottom-Drawer		
White Painted Drawers	1	
Internal Drawers	1	
LED lighting	•	
Glass door	•	
Equipment		
TriplePlay Refrigeration	•	
No Frost	•	
Flexzone	•	
TruPivot hinges	•	
DIMENSIONS/WEIGHT		
Width in	23 - 5/8"	600 mm)
Height in	83 - 1/2"	(2121 mm)
Depth without handle in	24"	(610 mm)
Minimum niche height in	84"	(2134 mm)
Door clearance in	46"	(1168 mm)
Door opening angle	105°	
Net Weight	386 lbs	(175 kg)
POWER / RATINGS (115 V, 60 HZ)		
Watts / Amps	472W - 4.1A	
Power Cable	Nema 5-15P	
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French / Spanish	



INTEGRATED DISHWASHER



DISTINTO

INTEGRATED DISHWASHER

Series Edit Finite Fully Integrated - Stanies Steel PERFORMANCES Fully Integrated - Stanies Steel Person Setting (biter / year) 265 State Consumption (ik/hr / year) 265 Mater Consulption (ik/hr / year) 265 Sound weil (dit) 60 Of Dir John 60 Momber of Buttons 60 Momber of Buttons 60 Normal Steetco 66' Of Dir John 6 Normal of Buttons 8d Response 8d Response 66' Program 38' 64' 50''' 65''' 70'' Balay Timer Balay Timer Balay Timer Response 10 60''''''''''''''''''''''''''''''''''''	CODE ID	24" INTEGRATED DISHWASHER WITH STAINLESS STEEL EXTERIOR F6DW24SS1	
PERFORMANCES PERCENT IN THE INPUT OF THE INP	Series	60	00
PERFORMANCES PERCENT IN THE INPUT OF THE INP	Finish	Fully Integrated	- Stainless Steel
Energy_Consumption (WM / year) 265 Water Consuption (WM / year) 3360 Sound level (68) 50 Program Selector Grey Push Buttons On / Of button • Program Selector Grey Push Buttons On / Of button • Program Gauge Red Temperature 38° -45° - 56° - 70° Delay Timer Display Tight Ph Rines Ad Level Indicator Light Acoustic Signal at End • Program Rapid 27° Normal (Energy Star) Wash programs 10 Normal (Energy Star) Program Crystal Extreme wash (Sanitzation) Wash program and fast Eco quick Extreme wash (Sanitzation) Program Crystal Extreme wash (Sanitzation) Crystal Extreme wash (Sanitzation) Extreme wash (Sanitzation) Crystal Extreme wash (Sanitzation) Extreme wash (Sanitzation) Crystal Extreme wash (Sanitzation) Extreme wash (Sanitzation) Crystal Normal Energy Ann •	PERFORMANCES		
Water Consuption (itters / year) 3360 HIDER CONTROLS 50 HIDER CONTROLS Grey Push Buttons On / Of button • Number of Buttons 4 Program Gauge Red Temperature 38° 45° - 55° - 6° - 70° Delay Timer Bisker Active Indicator Insea AdL Level Indicator Light Accounts Signal at End • PROGRAMMES • Wash programs 10 Program Crystal Extreme wash (Sanitization) Daily haff Load Rinse Ectoreme wash (Sanitization) Daily haff Load Rinse Rinse Ectoreme wash (Sanitization) Daily haff Load Normal (Energy Star) Crystal Light quick Storines Steel Charles Light quick Storines Steel Internal Door - - Lower Spray Arm - - Rear Foot Adjustment Concealed heating element - Turbidness Senor - - <		1	3
Water Consuption (itters / year) 3360 HIDER CONTROLS 50 HIDER CONTROLS Grey Push Buttons On / Of button • Number of Buttons 4 Program Gauge Red Temperature 38° 45° - 55° - 6° - 70° Delay Timer Bisker Active Indicator Insea AdL Level Indicator Light Accounts Signal at End • PROGRAMMES • Wash programs 10 Program Crystal Extreme wash (Sanitization) Daily haff Load Rinse Ectoreme wash (Sanitization) Daily haff Load Rinse Rinse Ectoreme wash (Sanitization) Daily haff Load Normal (Energy Star) Crystal Light quick Storines Steel Charles Light quick Storines Steel Internal Door - - Lower Spray Arm - - Rear Foot Adjustment Concealed heating element - Turbidness Senor - - <		26	65
Sound level (6B) 50 Frogram Selector O/ Of button Frogram Gauge Frogram Frogram Gauge Frogram Frogram Gauge Frogram Frogram Frogram Frogram Gauge Frogram Frogram Frogram		33	60
Program SelectorGrey Push ButtonsNumber of Buttons-Number of Buttons-Program GaugeBedTemperature38° - 45° - 55° - 65° - 70°Delsy TimerDisplay 1 digit 8hRinse Ad Level IndicatorLightAcoustic Signal at End-PROGRAMMES-PROGRAMMES-Vash programsExtreme wash (Sanitazion)ProgramCrystalExtreme wash (Sanitazion)ProgramCrystalExtreme wash (Sanitazion)ProgramCrystalExtreme wash (Sanitazion)ProgramCrystalExtreme wash (Sanitazion)ProgramCrystalExtreme wash (Sanitazion)ProgramCrystalExtreme wash (Sanitazion)ProgramProgramProgramStainless SteelTurb MatrialTop Syray ArmTop Syray ArmTop Syray ArmTop Syray ArmTop Syray ArmSingle LoadTurb MatrialTurb MatrialTurb MatrialTurb MatrialCrystalExtreme switchLower Spray ArmTop Syray ArmTurb MatrialTurb MatrialLower Spray ArmTurb Matrial	Sound level (dB)	5	0
On / Of button • Number of Buttons 4 Program Gauge Bed Temporature BigN - 55 - 55 - 70° Delay Timer Display 1 digit Bh Rins Adi Level Indicator Light Acoustic Signal at End • Program 10 Rins Adi Level Indicator BigNet Identity Program Crystal Externe wash (Sanitzation) Externe wash (Sanitzation) Program Crystal Fast cycles Eto quick Binse Adi Level Staniess Steel Internal Door Staniess Steel Tub Matrial Staniess Steel Internal Door Staniess Steel Lower Spray Arm • Tub/Bases Fill Keating Element Concealed heating element Turbidness Sensor • Hinges Fill Basket Color Gray Length of Intel Hose (mn) 172 Length of Intel Hose (mn) 172 Length of Intel Hose (mn) 13 eetings Overal dim - Mote (fin) 33 - 1747 - 35 - 34*			
Number of Buttons 4 Program Gauge Red Temperature 38" - 45" - 50" - 70" Delay Timer Display 1 digit 9h Rinse Aid Level Indicator Light Acoustic Signal at End • PROGRAMMES • Wash programs 10 Program Crystal Externe wash (Sanitization) Dially haft load Program Crystal Fast cycles Externe wash (Sanitization) ETL Sanitization listed • FAURISE Eco quick Using and fast Normal quick Vib Matrial Stainless Steel Internal Door • Lower Spray Arm • Top Spray Arm • Aquastop • Flage Flad Reagrind flage • Progray Arm • Top Spray Arm • Level for Adjustment Concealed heating element Turbidness Sensor • Hinges Flade Fluicrum - Not Adjusta		Grey Pus	h Buttons
Program Gauge Red Temperature 38' - 45' - 55' - 55' - 50' - 70' Delay Timer Display 1 digit 6h Rinse Ad Level Light Acoustic Signal at End Light Program Rapid 27' Normal (Energy Star) Program Crystal Extreme wash (Sanitzation) Daily half load Extreme wash (Sanitzation) Program Crystal Extreme wash (Sanitzation) Program Crystal Extorne Program Crystal Extorne wash (Sanitzation) Program Crystal Extorne Program Stainess Steel Extorne Turb Material Crocealed heating element Turbiness Sanital Turbiness Sansor Fuil Fuil Rearing Element Crocealed heating element Turbiness Sanital Single Load 4.0 - Pressure switch Extorne			
Temperature 38* - 45* - 55* - 67* Dieplay Timer Display 1 digit 9h Rinse Aid Lavel Indicator Light Acoustic Signal at End • PROGRAMMES 10 Wash programs 10 Program Rapid 27* Program Crystal Extreme wash (Sanitzation) Daily half load Fast cycles Light quick Stainless Steel Light quick To by Aterial Stainless Steel Internal Door • Top Saray Arm • Top Saray Arm • Variant Stainless Steel • Hinges • Hinges • Ford Adjustment • Top Saray Arm • Concealed heating element • Turbidness Steel • Hinges • Fland Hose (mm) • Length of Inter Hose (mm) 172 Length of Inter Hose (mm)			
Delay Timer Display 1 digit Bh. Rins Ad Lowin Light Acoustic Signal at End	<u> </u>		
Rinsé Ad Level Indicator it PROGRAMMES it Wash programs 10 Program Crystal Extreme wash (Sanitzation) Program Crystal Extreme wash (Sanitzation) Baily haff load Extreme wash (Sanitzation) Eco quick Fast cycles Light quick Storing and test FTL Sanitization listed • • FATURES • • Tub Material Stainless Steel • Internal Door Stainless Steel • Oraya Arm • • Aquastop Fill • Varialg Element Concealed heating element • Turbidness Sersor • • Hinges • • • Single Load • • • Length of Init Hose (mm) 172 • • Length of Init Hose (mm) 172 • • Lower Saret Adjustment • • • Variad Saret Solor • • • Length of Init Hose (mm) <			
Acoustic Signal at End PROGRAMMES Wash programs Program Progr			
PROGRAMMES 10 Wash programs 10 Program Crystal Extreme wash (Sanitization) Program Crystal Stainless Steel Internal Door Stainless Steel Internal Concealed heating element Internal Door Concealed heating element Concealed heating element Turbichess Sensor - - Hinges Fieud Putrum - Not Adjustable Rear Foot Adjustable - - Rear Foot Adjustable - - Length of Iniel Hose (mm) 172 - Length of Iniel Hose (mm) 172 - Length of Iniel H			
Wash programs 10 Program Rapid 27' Normal (Energy Star) Crystal Extreme wash (Sanitization) Daily half load Extreme wash (Sanitization) Program Rinse Eco quick Fast cycles Light quick Strong and fast Normal quick Strong and fast Normal (Energy Star) Tub Matrial Stainless Steel Stainless Steel Internal Door Stainless Steel Stainless Steel Cover Spray Arm • - Aquastop Full Keating Element Concealed heating element Turbidness Sensor • - - Bragid Zir Adjustment • - - Length of Inlet Hose (mm) 172 - - Length of Inlet Hose (mm) 170 - - Baskets Color Grey - - Loget Hardness Max 100°TH; 58°tH - - Dyper Basket Adjustment Concealed heating element - - Length of Inlet Hose (mm) <td>8</td> <td></td> <td>•</td>	8		•
Rapid 27 Normal Energy Star) Program Crystal Extreme wash (Sanitization) Daily half load Rinse Eco quick Fast cycles Light quick Strong and fast Tub Material Iteration listed • FEATURES • • Tub Material Stainless Steel • Internal Door Stainless Steel • Concealed heating element • • Aquastop • • Aquastop • • • Root Adjustable • • • Root Adjustable • • • Reating Element Concealed heating element • • Turbichess Sensor • • • • Baged Color 0 • • • Length of Intel Hose (mm) 172 • • • Length of Intel Hose (mm) 172 • • • Upper Basket Color Grey <td< td=""><td></td><td></td><td></td></td<>			
Program Crystal Extreme wash (Sanitization) Daily half load Daily half load Etreme wash (Sanitization) Fast cycles Einse Eco quick Strong and fast Light quick Strong and fast Strong and fast Strong and fast Tub Material • • • Tub Material Stainless Steel Internal Door Stainless Steel Internal Door Stainless Steel Internal Door • Tub Material • Tub Material Internal Door Internal Door Stainless Steel Internal Door Internal Door • Tub Material Internal Door In	Wash programs		
Daily half load Eco quick Rinse Eco quick Light quick Strong and fast Normal quick Strong and fast Tub Material • Tub Material • Internal Door Stainless Steel Internal Door Stainless Steel Lower Spray Arm • Top Spray Arm • Aquastop Full Keating Element Concealed heating element Turbidness Sensor • Hinges Fixed Fulorum - Not Adjustable Rear Foot Adjustment • Single Load 10°Ht; S8°dH Length of Inlet Hose (mm) 172 Length of Inlet Hose (mm) 172 Lower Basket • Upper Basket Adjustment • Overall dim - Height (min - max) 23 -9/16" Overall dim - Height (min - max) 23 -9/16" Overall dim - Height (min) 33 -13/16", 35 -3/4" Cut-out - Width 23 -5/8" Cut-out - Width 23 -5/8" <td< td=""><td></td><td></td><td></td></td<>			
Rinse Eco quick Light quick Strong and fast Normal quick Item and the strong and fast ETL Sanitzation listed • FEATURES • Tub Material Stainless Steel Internal Door Stainless Steel Lower Spray Arm • Aquastop Full Keating Element Concealed heating element Turbiness Sensor • Hinges Fixed Full Keating Element Concealed heating element Turbiness Gensor • Hinges • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Lower Basket Solor Grey Lower Basket Color Grey Lower Basket Mainstment Automatic 3 levels Overall dim - Width 23 - 9/16* Overall dim - Width 23 - 9/16* Overall dim - Width	Program		Extreme wash (Sanitization)
Fast cycles Light quick Strong and fast PET. Sanitization listed • FE. Sanitization listed • FEATURES • Tub Material Stainless Steel Internal Door Stainless Steel Lower Spray Arm • Aquastop Full Keating Element Concealed heating element Turbidness Sensor • Hinges Fixed Fulcrum - Not Adjustable Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Inlet Hose (mm) 172 Lower Basket • Upper Basket Adjustment • Overall dim - Height (min - max) 32 - 9/16* (598 mm) Overall dim - Height (min - max) 23 - 9/16* (690 mm) Overall dim - Height (min - max) 23 - 5/8* (600 mm) Cut-out - Width 23 - 5/8* (600 mm)			
Normal quick • ETL Sartization listed • FEATURES • Tub Material Stainless Steel Internal Door Stainless Steel Lower Spray Arm • Top Spray Arm • Aquastop Full Keating Element Concealed heating element Turbidness Sensor • Hinges Fixed Fulorum - Not Adjustable Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 170 Water Harchness Max 100°H; 58°dH Baskets Color Grey Lower Basket • Upper Basket • Upper Basket • Upper Basket • Overall dim - Height (min - max) 33 - 13/16°, 35 - 3/4′ (680 mm) Overall dim - Height (min - max) 23 - 9/16° (598 mm) Overall dim - Height (min - max) 23 - 5/8′ (680 mm) (690 mm) Cut-out - Height (min - max) 23 - 5/8′ (680 mm) (690 mm) Cut-out - Nichight (min - max) 22 - 5/8′ (680 mm) (690 mm) <td></td> <td></td> <td></td>			
ETL Sanitization listed • FEATURES • Tub Material Stainless Steel Lower Spray Arm • Aquastop Full Keating Element Concealed neating element Turbidness Sensor • Hinges Fixed Fulcrum - Not Adjustable Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Drain Hose (mm) 170 Water Hardness Max 100°H; 58°dH Baskets Color Grey Lower Basket • Upper Basket Adjustment 13 settings Overall dim - Nidth 23 - 9/16* (598 mm) Overall dim - Nidth 23 - 9/16* (600 mm) Overall dim - Nidth 23 - 3/16* (588 mm) Overall dim - Depth 23 - 3/16* (600 mm) Cut-out - Height (min) 33 - 13/16*, 35 - 3/4* (600 mm) Cut-out - Height (min) 23 - 5/8* (600 mm) Cut-out - Height (min) 33 - 13/16*, 146 kg) POWER (600 mm) Cut-out - Vidth 22 - 5/8*	Fast cycles		Strong and fast
FEATURES Tub Material Stainless Steel Internal Door Stainless Steel Lower Spray Arm • Aquastop Full Aquastop Full Keating Element Concealed heating element Turbidness Sensor • Hinges Fixed Fulorum - Not Adjustable Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inat Hose (mm) 172 Length of Inat Hose (mm) 170 Water Hardness Max 100°H; 58°dH Baskets Color Grey Lower Basket • Upper Basket • Upper Basket 13 settings Overall dim - Width 23 - 9/16° (588 mm) Overall dim - Nidth 23 - 3/16° (589 mm) Overall dim - Nidth 23 - 3/16° (589 mm) Overall dim - Nidth 23 - 3/16° (589 mm) Overall dim - Nidth 23 - 3/16° (589 mm) Overall dim - Nidth 23 - 3/16° (589 mm) Overall dim - Nidth 23 - 3/16° (580 mm)			
Tub Material Stainless Steel Internal Door Stainless Steel Lower Spray Arm • Aquastop • Aquastop • Aquastop • Reating Element Concealed heating element Turbidness Sensor • Hinges Fixed Fulcrum - Not Adjustable Rear Foot Adjustment • Single Load 0.0 - Pressure switch Length of Inlet Hose (rmm) 172 Length of Inlet Hose (rmm) 172 Length of Inlet Hose (rmm) 170 Water Hardness Max 100°H; 58°dH Baskets Color Grey Lower Basket • Upper Basket Adjustment Automatic 3 levels Cutlery Basket Adjustment 23 - 9/16" Overall dim - Width 23 - 9/16" Overall dim - Width 23 - 9/16" Overall dim - Night (min - max) 33 - 13/16", 35 - 3/4" Overall dim - Depth (598 mm) Overall dim - Depth (598 mm) Overall dim - Depth (598 mm) Overall dim - Depth (600 mm) C			•
Internal Door Stainless Steel Lower Spray Arm ● Aquastop Full Keating Element Concealed heating element Turbidness Sensor ● Hinges Fixed Fulcrum - Not Adjustable Rear Foot Adjustment ● Single Load 4.0- Pressure switch Length of Inlet Hose (mm) 172 Length of Inlet Hose (mm) 170 Water Hardness Max 100°H; S8°dH BASKetS ● Baskets Color Grey Lower Basket ● Upper Basket Adjustment ● Cutlery Basket ● Upper Basket Adjustment Gsmm) Overall dim - Height (min - max) 33 - 13/16°, 35 - 3/4° Overall dim - Depth 23 - 9/16° (680 mm) Cut-out - Width 23 - 5/8° (600 mm) Cut-out - Height (min) 33 - 7/8° (680 mm) Cut-out - Height (min - max) 22 - 5/8° (575 mm) Gress Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) Nema 5-15P INSTRUCTIONS FOR USE Int KW -			
Lower Spray Arm • Top Spray Arm • Aquastop Full Keating Element Concealed heating element Turbidness Sensor • Bases Fixed Fulcrum - Not Adjustable Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Inlet Hose (mm) 170 Water Hardness Max 100°FH; 58°dH BasketS 6 Lower Basket • Upper Basket Adjustment • Upper Basket Adjustment • Upper Basket Adjustment • Overall dim - Width 23 - 9/16° Overall dim - Width 23 - 9/16° Overall dim - Neight (min - max) 33 - 13/16°, 35 - 3/4° Overall dim - Depth 23 - 9/16° Cut-out - Width 23 - 5/8° Geo mm) Goo mm) Cut-out - Height (min) 33 - 13/16°, 35 - 3/4° Geo mm) Goo mm) Cut-out - Height (min) 33 - 7/8° Gross Weight 101 lbs POWER / RATINGS (115 V, 60 HZ) <td></td> <td></td> <td></td>			
Top Spray Arm • Aquastop Full Keating Element Concealed heating element Turbidness Sensor • Hinges Fixed Fulcrum - Not Adjustable Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Drain Hose (mm) 170 Water Hardness Max 100°fH; 58°dH BASKetS Color Grey Lower Basket • Upper Basket Color Grey Lower Basket Color Grey Cutlery Basket • Upper Basket Adjustment Automatic 3 levels Cutlery Basket • Overall dim - Neight (min - max) 33 - 13/16°, 35 - 3/4° Overall dim - Height (min - max) 33 - 13/16°, 35 - 3/4° Overall dim - Depth 680 mm) Cut-out - Width 23 - 9/16° Cut-out - Height (min) 33 - 13/16°, 35 - 3/4° Goor mm) Goor mm) Cut-out - Width 23 - 3/16° Grey (680 mm)			
Aquastop Full Keating Element Concealed heating element Turbidness Sensor - Hinges Fixed Fulcrum - Not Adjustable Rear Foot Adjustment - Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Inlet Hose (mm) 172 Kater Hardness Max 100°H; 58°dH Baskets Color Grey Lower Basket - Upper Basket Adjustment Grey Upper Basket Adjustment 13 setligs Overall dim - Width 23 - 9/16" (598 mm) Overall dim - Neight (min - max) 33 - 13/16", 35 - 34" (680 mm) - (910 mm) Overall dim - Height (min - max) 23 - 9/16" (598 mm) Out-out - Height (min) 23 - 5/8" (600 mm) Out-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Height (min) 33 - 7/8" (46 kg) POWER / RATINGS (115 V, 60 HZ) K/ Amps rating 1.4 kW - 13A Power Cable Nema 5-15P			
Keating Element Concealed heating element Turbidness Sensor • Hinges Fixed Fulcrum - Not Adjustable Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Drain Hose (mm) 172 Length of Drain Hose (mm) 170 Water Hardness Max 100°FH; 58°dH BASKETS Baskets Color Lower Basket • Upper Basket Adjustment Grey Lower Basket • Upper Basket Adjustment Automatic 3 levels Cuttery Basket 13 settings Overall dim - Width 23 - 9/16° (598 mm) Overall dim - Height (min - max) 33 - 13/16°, 35 - 3/4° (600 mm) - (910 mm) Overall dim - Height (min - max) 23 - 5/8° (600 mm) Cut-out - Width 23 - 5/8° (600 mm) Cut-out - Width 23 - 5/8° (600 mm) Cut-out - Width 22 - 5/8° (575 mm) Gross Weight 10 10 10 ls (46 kg) P			
Turbioness Sensor • Hinges Fixed Fulcrum - Not Adjustable Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Drain Hose (mm) 170 Water Hardness Max 00°fH; 58°dH BASKETS 00°fH; 58°dH Baskets Color Grey Lower Basket • Upper Basket Adjustment • Upper Basket Adjustment Automatic 3 levels Cutlery Basket 13 settings DIMENSIONS/WEIGHT 23 - 9/16" (598 mm) Overall dim - Height (min - max) 33 - 17/8" (600 mm) - (910 mm) Overall dim - Depth 23 - 5/8" (600 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Height (min - max) 22 - 5/8" (600 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Cut-out - Depth (min - max) 22 - 5			
Hinges Fixed Fulcrum - Not Adjustable Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Drain Hose (mm) 170 Water Hardness Max 100°fH; 58°dH BASKETS 6 Baskets Color Grey Lower Basket • Upper Basket Adjustment • Upper Basket Adjustment • Utiery Basket • Overall dim - Width 23 - 9/16" Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" Overall dim - Depth 23 - 3/16" Cut-out - Width 23 - 5/8" Cut-out - Height (min) 33 - 13/16", 35 - 3/4" Gross Weight 101 lbs POwer Cable Nema 5-15P INSTRUCTIONS FOR USE		Concealed he	
Rear Foot Adjustment • Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Drain Hose (mm) 170 Water Hardness Max 100°fH; 58°dH BASKETS - Upper Basket Color Grey Lower Basket - Upper Basket - Upper Basket Adjustment Automatic 3 levels Cutlery Basket 13 setTings DIMENSIONS/WEIGHT 23 - 9/16° (598 mm) Overall dim - Width 23 - 9/16° (598 mm) Overall dim - Width 23 - 9/16° (680 mm) - (910 mm) Overall dim - Height (min - max) 33 - 13/16°, 35 - 3/4° (860 mm) - (910 mm) Cut-out - Width 23 - 5/8° (600 mm) (610 mm) Cut-out - Width 23 - 5/8° (600 mm) (21 - 5/8° Gross Weight 101 lbs (46 kg) 46 kg) POWER / RATINGS (115 V, 60 HZ) Nema 5-15P Nema 5-15P		Fixed Fulence	Not Adjustable
Single Load 4.0 - Pressure switch Length of Inlet Hose (mm) 172 Length of Drain Hose (mm) 170 Water Hardness Max 100°H; 58°H BASKETS 0°FH; 58°CH Baskets Color Grey Lower Basket 0°FH; 58°CH Upper Basket Adjustment • Upper Basket Adjustment Automatic 3 levels Cuttery Basket 13 settings DIMENSIONS/WEIGHT 23 - 9/16" (598 mm) Overall dim - Width 23 - 9/16" (598 mm) Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" (860 mm) - (910 mm) Overall dim - Depth 23 - 3/16" (598 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Depth 33 - 7/8" (860 mm) Cut-out - Depth (min) 33 - 7/8" (600 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) Nema 5-15P INSTRUCTIONS FOR USE <td></td> <td></td> <td></td>			
Length of Inlet Hose (mm) 172 Length of Drain Hose (mm) 170 Water Hardness Max 100°fH; 58°dH BASKETS 00°fH; 58°dH Baskets Color Grey Lower Basket • Upper Basket Adjustment Automatic 3 levels Cutlery Basket 13 settings DIMENSIONS/WEIGHT 23 - 9/16" (598 mm) Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" (860 mm) - (910 mm) Overall dim - Depth 23 - 5/8" (600 mm) (21 - 01 - 01 mm) Cut-out - Width 23 - 5/8" (600 mm) (21 - 01 - 01 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) (22 - 5/8" Cut-out - Height (min) 23 - 5/8" (600 mm) (22 - 5/8" Cut-out - Height (min) 33 - 7/8" (860 mm) (22 - 5/8" Cut-out - Depth (min - max) 22 - 5/8" (575 mm) (575 mm) Gross Weight 101 lbs (46 kg) (46 kg) POWER / RATINGS (115 V, 60 HZ) KW / Amps rating 1.4 kW - 13A Nema 5-15P Nema 5-15P			-
Length of Drain Hose (mm) 170 Water Hardness Max 100°fH; 58°dH BASKETS 6 Baskets Color Grey Lower Basket • Upper Basket Adjustment Automatic 3 levels Cutlery Basket 13 settings DIMENSIONS/WEIGHT 0 Overall dim - Width 23 - 9/16" (598 mm) Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" (860 mm) - (910 mm) Overall dim - Height (min - max) 23 - 9/16" (598 mm) Out-out - Width 23 - 3/16" (600 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) KW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P INSTRUCTIONS FOR USE			
Water Hardness Max 100°fH; 58°dH BASKETS Image: Second Secon			
BASKETS Baskets Color Grey Lower Basket • Upper Basket Automatic 3 levels Cutlery Basket 13 settings DIMENSIONS/WEIGHT 0 Overall dim - Width 23 - 9/16" Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" Overall dim - Depth 23 - 3/16" Cut- out - Width 23 - 3/16" Cut- out - Width 23 - 5/8" Goo mm) 600 mm) Cut-out - Height (min) 33 - 7/8" Cut-out - Depth (min - max) 22 - 5/8" Gross Weight 101 lbs Hower Cable Nema 5-15P INSTRUCTIONS FOR USE Instructions For USE			
Baskets Color Grey Lower Basket • Upper Basket • Upper Basket Adjustment Automatic 3 levels Cutlery Basket 13 settings DIMENSIONS/WEIGHT Overall dim - Width Overall dim - Width 23 - 9/16" (598 mm) Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" (860 mm) - (910 mm) Overall dim - Depth 23 - 3/16" (589 mm) Cut-out - Width 23 - 3/16" (589 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) KW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P INSTRUCTIONS FOR USE		100 11,	, 36 011
Lower Basket • Upper Basket • Upper Basket Adjustment Automatic 3 levels Cutlery Basket 13 settings DIMENSIONS/WEIGHT • Overall dim - Width 23 - 9/16" Overall dim - Depth 23 - 3/16" Overall dim - Depth 23 - 3/16" Cut-out - Width 23 - 5/8" Cut-out - Height (min) 33 - 7/8" Cut-out - Depth (min - max) 22 - 5/8" Gross Weight 101 lbs POWER / RATINGS (115 V, 60 HZ) 46 kg) kW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P INSTRUCTIONS FOR USE		G	rev.
Upper Basket • Upper Basket Adjustment Automatic 3 levels Cutlery Basket 13 settings DIMENSIONS/WEIGHT - Overall dim - Width 23 - 9/16" (598 mm) Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" (860 mm) - (910 mm) Overall dim - Depth 23 - 3/16" (589 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) KW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P Nema 5-15P			
Upper Basket Adjustment Automatic 3 levels Cutlery Basket 13 settings DIMENSIONS/WEIGHT 23 - 9/16" (598 mm) Overall dim - Width 23 - 9/16" (600 mm) - (910 mm) Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" (860 mm) - (910 mm) Overall dim - Depth 23 - 3/16" (589 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) KW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P Nema 5-15P			
Cutlery Basket 13 settings DIMENSIONS/WEIGHT			
DIMENSIONS/WEIGHT Overall dim - Width 23 - 9/16" (598 mm) Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" (860 mm) - (910 mm) Overall dim - Depth 23 - 3/16" (589 mm) Overall dim - Depth 23 - 3/16" (600 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) KW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P Nema 5-15P			
Overall dim - Width 23 - 9/16" (598 mm) Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" (860 mm) - (910 mm) Overall dim - Depth 23 - 3/16" (589 mm) Cut-out - Width 23 - 3/16" (600 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) V V kW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P INSTRUCTIONS FOR USE V		1030	
Overall dim - Height (min - max) 33 - 13/16", 35 - 3/4" (860 mm) - (910 mm) Overall dim - Depth 23 - 3/16" (589 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) KW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P INSTRUCTIONS FOR USE		23 - 9/16"	(598 mm)
Overall dim - Depth 23 - 3/16" (589 mm) Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) 1.4 kW - 13A kW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P INSTRUCTIONS FOR USE			
Cut-out - Width 23 - 5/8" (600 mm) Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ) 1.4 kW - 13A kW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P INSTRUCTIONS FOR USE 1.4 kW - 13A	• • • •		
Cut-out - Height (min) 33 - 7/8" (860 mm) Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ)			
Cut-out - Depth (min - max) 22 - 5/8" (575 mm) Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ)			
Gross Weight 101 lbs (46 kg) POWER / RATINGS (115 V, 60 HZ)			
POWER / RATINGS (115 V, 60 HZ) kW / Amps rating Power Cable INSTRUCTIONS FOR USE			
kW / Amps rating 1.4 kW - 13A Power Cable Nema 5-15P INSTRUCTIONS FOR USE INSTRUCTIONS FOR USE		101100	\·- ··9/
Power Cable Nema 5-15P INSTRUCTIONS FOR USE		1.4 kW - 13A	
INSTRUCTIONS FOR USE			
	Use & Care Manual / Installation Manual	English / Erg	ach / Spanish

CODE ID	24" FULLY INTEGRATED DISHWASHER F6DW24FI1	
Series		600
Finish	Fully Integrate	ed - Panel Ready
PERFORMANCES		· · · · · · · · · · · · · · · · · · ·
Place Settings		13
Energy Consumption (kWh / year)		265
Water Consuption (liters / year)	3	3360
Sound level (dB) HIDDEN CONTROLS		50
Program Selector	Group	ush Buttons
On / Off button	Giey Fu	•
Number of Buttons		4
Program Gauge		Red
Temperature		55° - 65° - 70°
Delay Timer	Display	/ 1 digit 9h
Rinse Aid Level Indicator		Light
Acoustic Signal at End		•
PROGRAMMES		
Wash programs		10
	Rapid 27'	Normal (Energy Star)
Program	Crystal	Extreme wash (Sanitization)
	Daily half load	_
	Rinse	Eco quick
Fast cycles	Light quick	Strong and fast
	Normal quick	
ETL Sanitization listed		•
Tub Material	Otaial	
Internal Door		less Steel
Lower Spray Arm	Stam	•
Top Spray Arm		•
Aquastop		Full
Keating Element		heating element
Turbidness Sensor		•
Hinges	Fixed Fulcrum	n - Not Adjustable
Rear Foot Adjustment		•
Single Load	4.0 - Pre	ssure switch
Length of Inlet Hose (mm)		172
Length of Drain Hose (mm)		170
Water Hardness Max	100°f	H; 58°dH
BASKETS		_
Baskets Color	(Grey
Lower Basket	•	
Upper Basket		
Upper Basket Adjustment	Automatic 3 levels	
Cutlery Basket	13 s	settings
DIMENSIONS/WEIGHT Overall dim - Width	23 - 9/16"	(598 mm)
Overall dim - Width Overall dim - Height (min - max)	33 - 13/16", 35 - 3/4	
Overall dim - Depth	23 - 3/16"	(589 mm)
Cut-out - Width	23 - 5/8"	(600 mm)
Cut-out - Height (min)	33 - 7/8"	(860 mm)
Cut-out - Depth (min - max)	22 - 5/8"	(575 mm)
Gross Weight	106 lbs	(48 kg)
POWER / RATINGS (115 V, 60 HZ)		
kW / Amps rating	1.4 kW - 13A	
Power Cable	Nema 5-15P	
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual		ench / Spanish



A FAMILY A PASSION-



FULGOR MILANO

> There are few places in the world where food has been the very backbone of a culture like it has been in Italy for centuries. A passion for cooking, creating and using local ingredients, has inspired generations of Italian families and has made the kitchen the heart of the home. The aroma of long hours of food preparation, tables filled with recipes handed down generation to generation, accompanied with the perfect local wine are moments that linger in our memories and give us a sense of home even when we are far away. These things are what being Italian is all about. The Meneghetti Family has brought us the Fulgor Milano line of products so that we too may be inspired to cook and create with this same passion at home. Every Fulgor Milano product has been designed and developed to not only meet or exceed expectations of performance and quality, but also provide a design that is uniquely Italian.



DESIGNED IN ITALY



UGO MARINELLO

IDA Award winning designer Ugo Marinello is passionate about his work and his desire to synthesize modern rationality with traditional design. A graduate of IUAV in Venice, he draws inspiration from the unique architecture of that city, using it as a founda-tion to bring innovative yet timeless design and quintes-sential Italian spirit to your home and kitchen throughout the Fulgor Milano line.

ALFRED HENDRICKX

Known internationally for his mid-century furniture collec-tions, designer Alfred Hen-drickx began incorporating the strong lines of industrial styling and materials like stainless steel early in his career. After many successful design collaborations in Eu-rope, he turned his attention to the design of household appliances, notably marrying modern form and function for Meneghetti and Fulgor Milano.







Rosà - Vicenza - Italy www.fulgor-milano.com info@fulgor-milano.com