

INDUCTION HOBS



CODE ID

INDUCTION HOB WITH CENTER VENTING 80

FCLHD 8041 HID TS BK2



- Flush Top Installation
- Semi - Flush Top Installation
- Slide Touch Control
- Glass Ceramic Surface
- Temperature Sensor
- Residual Heat System
- Booster
- Timer
- Flexi Zone
- Pan Detection System

INDUCTION HOB WITH CENTRAL INNER VENTING

Cera Black ceramic surface

PERFORMANCE

4 cooking zone
2 vertical flexi zone
Rapid heating booster
Automatic heating
Keep warm
End of cooking timer
Center hood two-sides venting
Black steel central grid
Suction power: 645 m³/h
Sound level: from 53 to 63 dBA
Energy efficiency class: A+

FEATURES

Touch slider controls
Flush Top Installation
Space-saving motor

SAFETY

Pans detection sensor
Safety switch (accidental use prevention)
Residual heat indicator (H)
Automatic shutdown with temperature sensor

OPTIONAL ACCESSORIES


FHCF 55: set of 2 HP filters for filter version



CERABLACK
FCLHD 8041 HID TS BK2

FULGOR MILANO

INDUCTION HOB

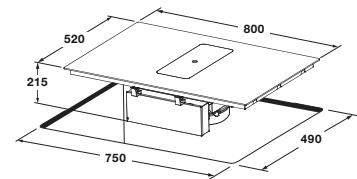

FCLHD 8041 HID TS BK2	
Type	ARIA + with integrated central venting
Finishing	CeraBlack
INDUCTION PERFORMANCES	
Octa Ø 290 / 180 DUAL	2100 / 3700 (x 4) W
Zone flexi	•
Max absorbed power (W)	7360 W
Preloaded temperatures 42 ° C Melting	•
70 ° C Slow cooking	•
90 ° C Simmer	•
INDUCTION COMMANDS	
Programming	Slider touch
AUTO cooking	•
Timer	•
Residual Heat Indication (H)	•
Warning indicator sound / Pan detector	• / -
Lock safety key	•
Power levels n.	9 + P
Visual digit display	•
HOOD FEATURES	
Energy efficiency class	A +
Levels of aspiration	•
Delayed auto shut-off	• / 10 min
Grease filter saturation indicator	• / 30 h
HP filter replacement light	-
Grease filters with oil / type collection	Stainless steel
Dishwasher safe grease filters	•
Minimum Ø air discharge	rectangular 220 x 90
Air flow non-return FLAP	-
HP filter for filter (optional)	FHCF 55
AUTO opening (2 steps)	-
Commands	Touch slider
Extractive capacity up to m3 / h	645 m³/h
Noise emissions (dBA)	53 - 63
Estimated annual consumption (kWh)	43,3
BRHM Motor (W)	220
ACCESSORIES	
Scraper	-
Cord	•
DIMENSIONS	
Width mm	800
Height mm	-
Depth mm	520
Cut-out (W x D) mm	750 x 490