

OUTDOOR






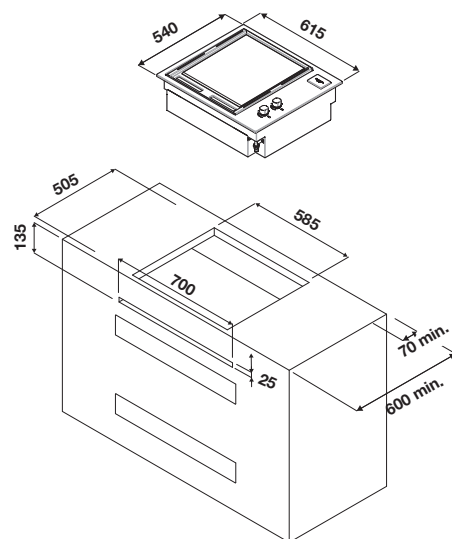

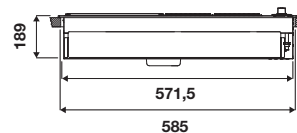
CODE ID

60 GAS TEPPANYAKI

FOBQ 601 TY G X



-  Gas supply
-  Gas safety
-  Grill
-  Teppanyaki



OUTDOOR GAS TEPPANYAKI

AISI 316 stainless steel

PERFORMANCE

2 tubular gas burners, in line, usable with both NG and LPG, Total power 7.6 kW
Cooking on the grill and roasts

FEATURES

Metal knobs with lateral position Electronic ignition (with battery)
Stainless steel plate (Teppanyaki)
Removable grease collector, oil and cooking residues

SAFETY

GasProtekt
Gas detection and stop system

OPTIONAL ACCESSORIES

FOBQ TY CAST Teppanyaki cast iron plate
FOBQ LL 600 X standard cover
FOBQ HL 600 X high lid for roasting



STAINLESS STEEL
FOBQ 601 TY G X

OUTDOOR

CODE ID



HIGH LID

FOBQ HL 600 X



HIGH LID

AISI 316 stainless steel
For roasting and keep warm
External thermometer for detection of the cooking temperature
Tubular steel handle

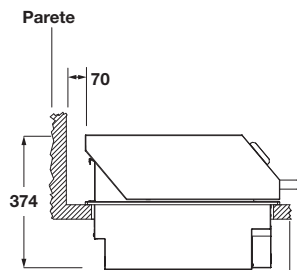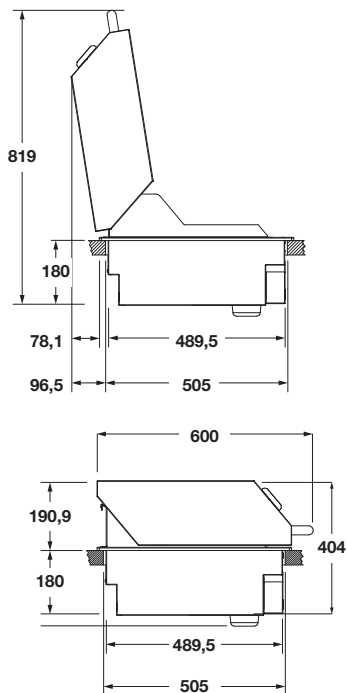


STAINLESS STEEL
FOBQ HL 600 X

CODE ID





STANDARD LID

FOBQ LL 600 X

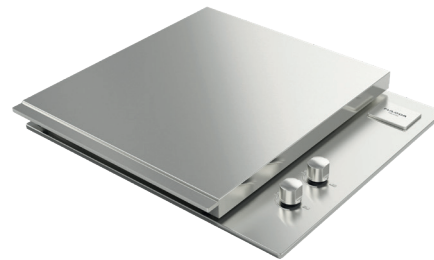

STANDARD LID

AISI 316 stainless steel
Flat metal handle

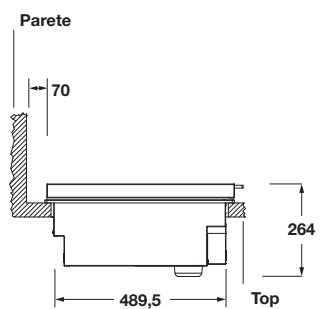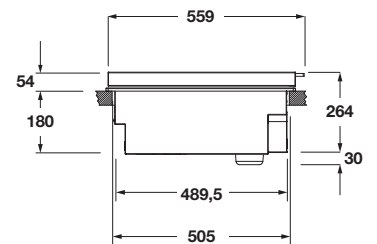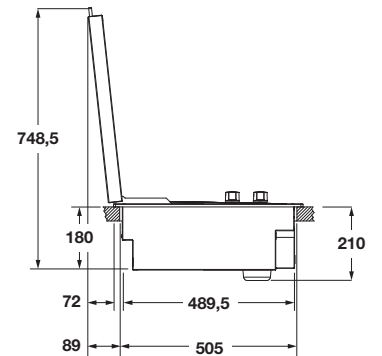

STAINLESS STEEL
FOBQ LL 600 X

PROFESSIONAL

BARBECUE



	FOBQ 601 TY G X	FOBQ HL 600 X	FOBQ LL 600 X
Type	Built-in Teppanyaki	High lid	Standard lid
Finishing	Stainless steel	Stainless steel	Stainless steel
EXTERIOR			
Knobs material / no.	Steel / 2	-	-
Lid with double level for roasting	-	•	-
Standard lid	-	-	•
INTERIOR			
Teppanyaki (material)	Stainless steel	-	-
Grids (material)	-	-	-
Tubular burners	2	-	-
Internal tub	Black enamel	-	-
Steel handle	-	•	•
FEATURES			
Supply	Gas	-	-
Grids n.	-	-	-
Gastronorm tray to collect liquids	•	-	-
Grid for reheating	-	•	-
Total power of gas burners	7,6 kW	-	-
Electronic ignition	•	-	-
Battery for ignition	•	-	-
Thermometer	-	•	-
Types of gas	GN - GPL	-	-
DIMENSIONS			
Cooking zone width mm	440	-	-
Width mm	615	490	490
Height mm	189	191	54
Depth mm	540	600	559
Cut-out (W x H x D) mm	585 x 210 x 505	-	-