



SINCE passione i ttaliana 1949

ED11

FULGOR MILANO

INDEX



PROFESSIONAL

page	22	COOKING
page	84	REFRIGERATION
page	94	VENTILATION
page	106	DISHWASHERS
page	108	ACCESSORIES
page	232	PRODUCT DRAWINGS
page	265	TECHNICAL DATA



DISTINTO

COOKING	page	128
REFRIGERATION	page	204
VENTILATION	page	212
DISHWASHERS	page	224
ACCESSORIES	page	230
PRODUCT DRAWINGS	page	253
TECHNICAL DATA	page	296



FULGOR MILANO

OF MILANO

Milano is renowned the world over as the center of style and design. At Fulgor Milano we are inspired by this great city and its rich history of combining form and function with architecture. It is from this city which Sofia is born.

Sofia embodies a styling that is all her own, with an attention to detail and design that is unsurpassed in the industry. As it is with the Cathedral of Milano, our Sofia range stands out in a crowd. Drawing inspiration from the modern





cosmopolitan city of today, Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable.



POM/ of Rome



Not unlike the incredible eternal city of Rome, our Sofia products are designed to stand the test of time. A product that embodies endurance and is built on a tradition of beauty, durability, and functionality. Rome has survived over two Millennia through evolution of design and innovation. Fulgor Milano's passion for innovation has resulted in premium products born from a culinary culture dating back to ancient



Rome but in synergy with today's lifestyle. Every one of our Sofia products has been developed to offer a lifetime of performance in an ergonomic and comfortable design that is both elegant and simple to use.



FULGOR MILANO

LIKE VENICE



There is not a more unique city in the world than Venice. A city that by modern engineering standards should not exist. A city built on the sea, that has inspired generations of visitors for centuries.

The original gateway to the east, Venice is a city whose architecture incorporates design aspects from the middle east and Asia, adding to its unique appeal. No other place influences the styling of Sofia more than Venice.





Sofia's designer, having attended the school of Architecture at the University of Venice, drew his inspiration during this time in Venice. It is only fitting that this unique city influenced the unique design of our beautiful Sofia range.



MILANO

PROFESSIONAL

DISCOVER THE ITALIAN CHARATERISTICS

DESIGN **POWER** UNIQUE

Sofia represents the beauty and sophistication that is Italy and the Meneghetti Family has paid tribute to all the unique cultural aspect of this storied country with Sofia and the complete

line of Fulgor Milano products. Inspired by all the great regions of Italy, Sofia was born in the heart of the Veneto region, culturally rich in art and tradition. Sofia embodies a contemporary



design that is feminine and powerful, which inspires us to prepare dishes worthy of admiration. The Meneghetti Family has presented us with a symbol of the ultimate expression of Italian excellence.

PROFESSIONAL LINE









POWERFUL ELEGANCE

Sofia is a solid, generously sized freestanding range with a clean and rigorous style. Designed, developed and engineered in Italy to exceed all expectations of quality, performance and style. Sofia will captivate the most discerning chef with nuanced features that are traditional yet

SOFIA PROFESSIONAL





SOFIA IS AN INDIVIDUAL

We designed a professional range with a style and presence unique to her name. Sofia integrates the use of stainless steel and brushed aluminum for a design that is elegant and distinctive.

TOTAL CONTROL AND DELICATE POWER

Every aspect of Sofia is beautiful and her gas cooking surface is no exception. Every burner allows you to temper the most delicate chocolate or sear a steak to perfection.

TOTAL ACCESS AT YOUR FINGERTIPS

Choose multiple baking functions, timed bake, meat probe, and a variety of other customizable settings and baking features.


PROFESSIONALLY CRAFTED

This multifunction range, combines all the features of a fully-equipped professional range with a stainless steel design which highlights the elegance and uniqueness of Italian style.



TRILAMINATE GRIDDLE

As if 6 powerful burners wasn't enough, the addition of a Trilaminate griddle allows additional versatility to the cooking surface. With 11,500 BTUs of even heat, Sofia sears with conviction and the easy to care for surface will be beautiful for its entire lifetime.

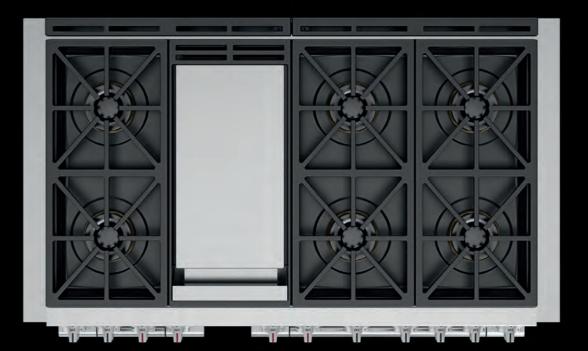



DUAL BURNER WITH BRASS BURNER RING

For perfect control, easy cleaning, and lasting performance, the brass burner ring and the precision flame ports remain corrosion free.

CAST IRON GRATES AND MATTE BURNER BASIN

Heavy duty cast iron grates form a continuous surface for easy movement of pots and pans. You will barely no-tice spillovers in this recessed burner basin and they will clean up easily, too.



ROBUST CONTROL KNOBS

A perfect match for the bold design of the control panel, robust brushed metal knobs ensure easy handling and precise control while cooking.



CRESCENDO BURNER



Because precision is important for powerful high and gentle low flames, our sealed burners offer five combinations of flame configurations for near infinite control. Durable brass burner rings provide exceptional heat distribution to the base of the cooking vessel at its maximum output of 20,000 BTUs and is also capable of the gentlest simmer aided by its oversized burner cap.











FORTE

At the peak of its 20,000 BTU capability, meat is seared to produce a crust worthy of your favorite chef. Large pots quickly recover to a rigorous boil, and no culinary conquest seems unattainable. All burner rings engage to produce the most powerful flame for cooking.

MEZZOFORTE

Perfect al dente pasta is a snap. Progressive control of the burner ensures maximum heat distribution without excessive flame for an even and moderate boil.

MEZZO

Creamy risotto and smooth custards come to life as the burner rings combine to provide enough heat to encourage the cooking but discourage scorching.

PIANOFORTE

Simmer, poach, or braise your way to a tender sauce, soup or stew. Flame curls around the diffuser cap to barely brush the base of the cooking vessel with perfect control for extended periods of low heat cooking.

PIANO

Melt butter, temper chocolate, or gently coax the flavor from savory vegetables, this lowest setting is achieved by the flame from the simmer burner rolling gently under the diffuser cap to radiate whisper soft heat.











AUTOGRAPH YOUR KITCHEN MAKE IT EXCLUSIVELY YOURS!

Customize your Sofia kitchen with your chosen name. Visit the Fulgor Milano website to create your personalized name plate for the oven door. The complimentary plate will be delivered to your home where your unique Sofia kitchen is exclusively yours.



48" DUAL FUEL PRO SOFIA RANGE

THE ART OF COOKING EXPANDED

FULGOR MILANO

Thoughtfully designed surface cooking with six burner positions, each with a 5 in 1 Crescendo burner beneath continuous cast iron grates and a Trilaminate Stainless Steel griddle, providing unparalleled power and control to melt, simmer, saute, and sear as you desire. Below the cooking surface, two self cleaning convection ovens with intuitive multiple baking and broiling functions and the convenience of telescoping racks encourages you to cook the way you want.





48" DUAL FUEL PRO SOFIA RANGE

TRILAMINATE GRIDDLE

Functional and beautiful with layers of two unique types of stainless steel for durability and easy cleaning form a three layer griddle with the addition of aluminum for even and consistent heat distribution.

UNSURPASSED CRAFTSMANSHIP

Superior Italian steelmaking craftsmanship ensures perfectly polished edges and smooth corners, concealing screws and welds for an impeccable finish.

COOL TOUCH DOOR

4 layers of thermo-reflecting glass ensure the safety of a cool touch door while the oven is on - even at its highest temperature during the self-clean cycle.

CONVENIENCE OVEN

Identically featured as its larger mate, but without meat probe, this self-cleaning, multi function convection oven does everything in a smaller space, adding efficiency and flexibility. It even has a telescopic rack.

CAST IRON GRATES

Built to withstand searing heat and rapid temperature changes without losing their strength, continuous cast iron grates allow pans to be easily repositioned at your convenience.

SIX BURNERS

6 cooking zones, each with Crescendo burners create 5 levels of cooking power. At each level, the perfect combination of power and even distribution of heat allows precise results from temper to sear with a maximum 20,000 BTU. A combination of burner rings at different levels controls the relation of the flame to the bottom of the cooking vessel, allowing whisper soft heat for melting or rendering to ultra high searing and deglazing.

DUAL OVENS

Two self-cleaning convection ovens with multiple baking functions allow for ultimate flexibility, performance and capacity. Telescopic chrome oven racks allow for convenient inspection of dishes during cooking and effortless removal when done.

SOFT CLOSING DOOR

Robust stainless steel oven doors with wide viewing windows get an assist from shock absorbing hinges, facilitating an effortless soft closing oven.

EXCLUSIVE TRILAMINATE STAINLESS STEEL GRIDDLE

The ultimate in performance and beauty, heat is evenly and uniformly distributed across the griddle surface allowing for golden pancakes, perfectly crusted steaks, and everything in between. With an easy to clean surface, the griddle resists discoloration at even the highest temperatures to remain unaffected for years to come.

GRIDDLE BURNER

11,500 BTU tubular aluminum burner with evenly distributed flame ports conducts heat to the griddle for optimal performance at maximum power. 2,000 BTUs at low power for more delicate foods. Sear a steak or make a golden griddle cake with ease.



SURGICAL STAINLESS STEE

Provides unrelenting protection against corrosion, pitting, and discoloration, this non-reactive surgical stainless steel ensures easy cleaning and durability.

ALUMINUM

Allows for even heat distribution across the entire grilling surface from edge to edge for precise cooking and consistent browning.

2

STAINLESS STEEL

Establishes a stable and rigid foundation for a consistently flat and enduring direct cooking surface.

SOFIA PROFESSIONAL 48"

48" DUAL FUEL PROFESSIONAL RANGE





SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates Trilaminate Stainless Steel Griddle with Tubular Gas Burner 11,500 BTU high / 2,000 BTU low Matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

OVENS

Dual True Convection in main oven and True Convection in accessory oven Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing doors Extra-large baking cavity and viewing area 3 Halogen lights on main oven 2 Halogen light on accessory oven Gross capacity 4.4 cu. ft. and 2.7 cu. ft. 2 chrome racks per oven 1 telescopic rack per oven

CODE ID

ð

4

F6PDF486GS1

	Heavy Duty Grates
	Continuous Grate Surface
	Dual Crescendo Burner
	Trilaminate Stainless Steel
88	Dual True Convection (main oven)
X	Single True Convection (accessory oven)
4	Soft Closing Doors
•••	Self Clean Ovens
	Multi-level cooking
1	1 Telescopic Rack per Ove
*	Cool Touch Doors
00:00	Digital Controls
<u>e</u>	Meat Probe (main oven)
$\langle \circ \rangle$	Fast Pre-Heat

	Dual Crescendo Burner
	Trilaminate Stainless Steel Griddle
9	Dual True Convection (main oven)
)	Single True Convection (accessory oven)
	Soft Closing Doors
	Self Clean Ovens
	Multi-level cooking
	1 Telescopic Rack per Oven
J	Cool Touch Doors
]	Digital Controls

page

PDRKIT48	Color kit	114
MWOK	Wok ring	121
MSIM	Simmer plate	121
6BG48BCI	Island trim	121
6BG48STD	Standard trim	120
6BG48HBT	High back trim	120
MTRP30	Telescopic rack	122
MTRP18	Telescopic rack	122
		000

TECHNICAL DWG	238
TECHNICAL DATA	272

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe on main oven only Self-Clean Sabbath Mode

FULGOR MILANO



Heavy duty cast iron grates form a continuous surface for easy movement of pots and pans. You will barely notice spillovers in the recessed matte black burner basin and they will clean up easily, too.

Because precision is important for powerful high and gentle low flames, our sealed 6 Crescendo Dual burners offer five combinations of flame configurations for near infinite control.

Durable brass burner rings provide exceptional heat distribution to the base of the cooking vessel at its maximum output of 20,000 BTUs and is also capable of the gentlest simmer aided by its oversized burner cap.

OVEN

Perfect visibility and clean lines are essential components of Sofia's character. The wide glass, cool touch door is equipped with a shock absorber for stable, assisted closure (soft closing) of the oven.

The self-cleaning dual true convection oven with multiple baking functions allows for ultimate flexibility, performance and capacity with a full-extension rack with stainless glides.

The Sofia Dual Fuel Professional Range is also available in the 30" size, with 4 single Dual Flame Crescendo Burners and a dual true convection oven.

36" DUAL FUEL PRO SOFIA RANGE







SOFIA PROFESSIONAL 36"

36" DUAL FUEL PROFESSIONAL RANGE

COOKING



CODE ID

ð

F6PDF366S1 4



OPTIONAL ACCESSORIES page

PDRKIT36	Color kit	115
FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG36BCI	Island trim	121
F6BG36STD	Standard trim	120
F6BG36HBT	High back trim	120
FMGRID36	36" Griddle	121
FMTRP36	Telescopic rack	122
F6BG36ISL	1" Island trim	121
TECHNICAL DWG		239

TECHNICAL DATA

273

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode

SOFIA PROFESSIONAL 30"

30" DUAL FUEL PROFESSIONAL RANGE



SPECIFICATIONS

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible)

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks 1 telescopic rack Enameled Broiler Pan

OVEN

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks 1 telescopic rack Enameled Broiler Pan

30 FULGOR MILANO

ð

4

F6PDF304S1

	Heavy Duty Grates
	Continuous Grate Surface
	Dual Crescendo Burner
88	Dual True Convection
\leq	Soft Closing Door
•••	Self Clean Oven
	Multi-level cooking
	1 Telescopic Rack
*	Cool Touch Door
00:00	Digital Controls
<u></u>	Meat Probe
ŝ	Fast Pre-Heat

OPTIONAL ACCESSORIES	pag
	pag

PDRKIT30	Color kit	115
FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG30BCI	Island trim	121
F6BG30STD	Standard trim	120
F6BG30HBT	High back trim	120
FMGRID30	30" Griddle	121
FMTRP30	Telescopic rack	122
F6BG30ISL	1" Island trim	121
TECHNICAL DWG		239
TECHNICAL DATA		273

OVEN FUNCTIONS

- Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Fast Pre-Heat Self-Clean Sabbath Mode



Imagine all that you can create with the generous 48" All Gas Sofia Professional Range. With 6 crescendo burners and a trilaminate stainless steel griddle, the possibilities are endless. Give in to all your baking whims with two well appointed gas ovens. The main 30" multifunction oven features a large internal cavity and our new Nova Broiler system - the ultimate culinary experience is within your reach.



TRILAMINATE GRIDDLE

Functional and beautiful with two unique types of stainless steel, for durability and easy cleaning, form a three layer griddle with the addition of aluminum for even and consistent heat distribution.



ITALIAN CRAFTSMANSHIP

Superior Italian steelmaking craftsmanship ensures perfectly polished edges and smooth corners, concealing screws and welds for an impeccable finish.









OVEN CONTROL

Sofia's digital control display allows you to monitor temperature levels in the 30" oven.






AUTOGRAPH YOUR KITCHEN

Visit the Fulgor Milano website to customize the nameplate of the oven door with your name.

The complimentary plate will be delivered to your home.

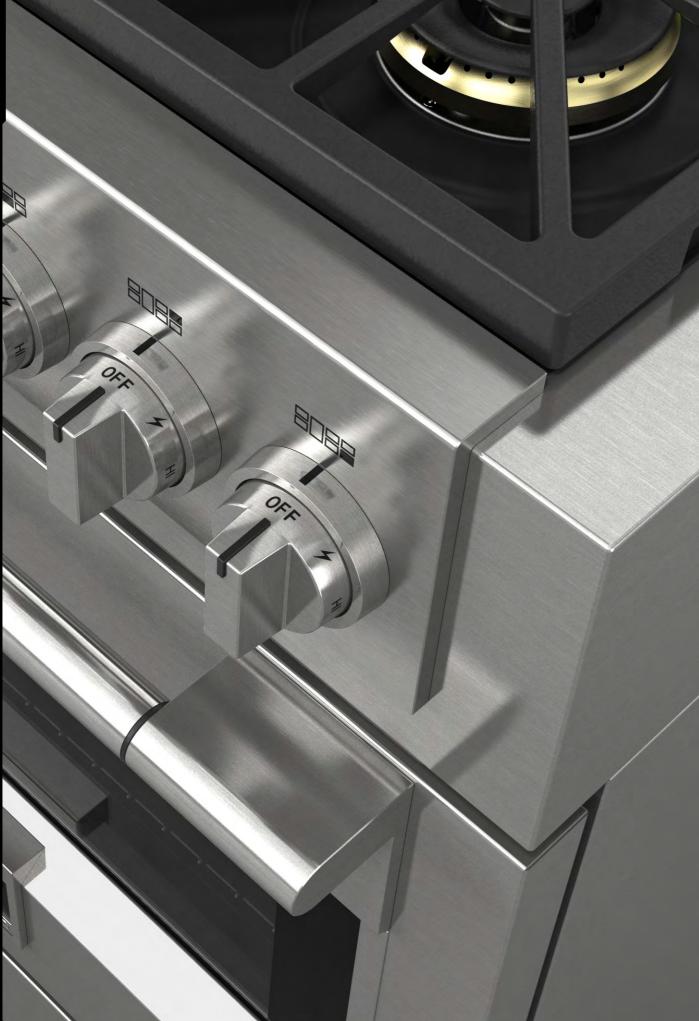

SOFIA PROFESSIONAL 48"

48" ALL GAS PROFESSIONAL RANGE



SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates Trilaminate Stainless Steel Griddle with Tubular Gas Burner 11,500 BTU high / 2,000 BTU low Matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

OVENS

Dual Convection in main oven and Convection in accessory oven Black Porcelain enamel interior Cool to the touch soft closing doors Extra-large baking cavity and viewing area 3 Halogen lights on main oven 2 Halogen light on accessory oven Gross capacity 4.4 cu. ft. and 2.7 cu. ft. 2 chrome racks per oven 1 telescopic rack per oven



CODE ID

ð

λ

F6PGR486GS2

	Heavy Duty Grates
	Continuous Grate Surface
• • • • • • • • • • • • • • • • • • • •	Dual Crescendo Burner
	Trilaminate Stainless Steel Griddle
& &	Dual Convection (main oven)
*	Single Convection (accessory oven)
Ň	Soft Closing Doors
00:00	Digital Controls
	Multi-level cooking
1	1 Telescopic Rack per Oven
*	Cool Touch Doors
	Nova Broiler System

OPTIONAL AC	page	
PDRKIT48	Color kit	114
FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG48BCI	Island trim	121
F6BG48STD	Standard trim	120
F6BG48HBT	High back trim	120
FMTRP30	30" Telescopic rack	122
FMTRP18	18" Telescopic rack	122
TECHNICAL DWG		238
TECHNICAL DATA		274

NOVA BROILER SYSTEM

Intense heat sears meats and fish locking in juices, with large broiling area. Ventilation in our All Gas Pro Ranges allows for closed door broiling, which ensures constant cooking.

OVEN FUNCTIONS

Bake Broil Convection Sabbath Mode (main oven) COOKING

SOFIA PROFESSIONAL 36"

36" ALL GAS PROFESSIONAL RANGE





SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

NOVA BROILER SYSTEM

Intense heat sears meats and fish locking injuices, with large broiling area. Ventilation in our All Gas Pro Ranges allows for closed door broiling, which ensures constant cooking.

OVEN

Dual Convection Oven temperature electronic control Nova Broiler System Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks 1 telescopic rack Enameled Broiler Pan

CODE ID F6PGR366S2

ð

λ



SOFIA PROFESSIONAL 30"

30" ALL GAS PROFESSIONAL RANGE



OPTIONAL ACCESSORIES	page
----------------------	------

PDRKIT36	Color kit	115
FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG36BCI	Island trim	121
F6BG36STD	Standard trim	120
F6BG36HBT	High back trim	120
FMGRID36	36" Griddle	121
FMTRP36	Telescopic rack	122
F6BG36ISL	1" Island trim	121
TECHNICAL DWG		239
TECHNICAL DATA		275

OVEN FUNCTIONS

Bake Broil Convection Pizza cooking mode 590 °F Dehydrate Timer Sabbath Mode

SPECIFICATIONS

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible)

NOVA BROILER SYSTEM

Intense heat sears meats and fish locking in juices, with large broiling area. Ventilation in our All Gas Pro Ranges allows for closed door broiling, which ensures constant cooking.

OVEN

Dual Convection Oven temperature electronic control Nova Broiler System Black Porcelain enamel interior Cool to the touch soft closing door 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks 1 telescopic rack Enameled Broiler Pan

ð

F6PGR304S2

	Heavy Duty Grates
	Continuous Grate Surface
	Dual Crescendo Burner
8	Dual Convection
\leq	Soft Closing Door
*	Cool Touch Door
	Multi-level cooking
	1 Telescopic Rack
00:00	Digital Controls
	Nova Broiler System

OPTIONAL ACCESSORIES

page

PDRKIT30	Color kit	115
FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG30BCI	Island trim	121
F6BG30STD	Standard trim	120
F6BG30HBT	High back trim	120
FMGRID30	30" Griddle	121
FMTRP30	Telescopic rack	122
F6BG30ISL	1" Island trim	121
TECHNICAL DWG		239
TECHNICAL DATA		275

OVEN FUNCTIONS

- Extra-large baking cavity and viewing area
- Bake Broil Convection Pizza cooking mode 590 °F Dehydrate Timer Sabbath Mode



36" INDUCTION PRO SOFIA RANGE



control knobs. closing) of the oven. unsurpassed baking performance.



The Sofia Induction Range features a powerful premium induction technology under an elegant glass surface featuring the new 11" Dual Max Power burner. The instant response and precise control of the induction are ensured by the presence of professional

The wide glass, cool touch door is equipped with a shock absorber for stable, assisted closure (soft

The self-cleaning dual true convection oven offers an

36" INDUCTION PRO SOFIA RANGE



MULTI CONV BAKE

DUAL MAX POWER

Large pans receive full power for capacity and consistent heat distribution while cooking. The 11" Dual Induction Zone offers a fifth burner for any size pan at any power level for ultimate flexibility.

DIGITAL MINUTE MINDER CONTROL

COMMAND CONTROL KNOBS

Quick control, efficient and fast, a choice that combines style, practicality and professional touch.



Set it and forget it! The Digital Minute Minder chime will remind you of the end of the timer cycle.

SOFIA PROFESSIONAL 36"

36" INDUCTION PROFESSIONAL RANGE

000

FULGO

Easy Clean Ceramic Glass $\langle \rangle$ Power Boost Burner \bigcirc Dual Max Power Ĩ Pan Detection system Residual Heat Sensor 88 **Dual True Convection** \mathbf{X} Soft Closing Door Self Clean Oven Multi-level cooking 1 Telescopic Rack Cool Touch Door **Digital Controls** æ Meat Probe $\langle \circ \rangle$ Fast Pre-Heat

4

CODE ID

F6PIR365S1

OPTIONAL ACCESSORIES page

PDRKIT36	Color kit	115
F6BG36IND	Island trim	120
F6BG36STD	Standard trim	120
F6BG36HBT	High back trim	120
F6BG36BCI	Island trim	121
INDUKIT4	Induction plate adapters	122
FMTRP36	Telescopic rack	122
TECHNICAL DWG		239

TECHNICAL DWG	239
TECHNICAL DATA	276

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode

SOFIA PROFESSIONAL 30"

30" INDUCTION PROFESSIONAL RANGE



SPECIFICATIONS

COOKING SURFACE

4 Single Induction cooking zones Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function Pot Detection System Child Lock Function Failure Codes Indication Automatic Heat-up Time

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks 1 telescopic rack Enameled Broiler Pan

SPECIFICATIONS

COOKING SURFACE

4 Single Induction cooking zones 1 Dual Max Power with Ø 11" cooking zone Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function Digital Minute Minder / Pot Detection System Child Lock Function Failure Codes Indication Automatic Heat-up Time

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks 1 telescopic rack Enameled Broiler Pan

F6PIR304S1



Easy Clean Ceramic Glass Power Boost Burner Pan Detection system **Residual Heat Sensor** Dual True Convection Soft Closing Door Self Clean Oven Multi-level cooking 1 Telescopic Rack Cool Touch Door Digital Controls Meat Probe Fast Pre-Heat

OPTIONAL ACCESSORIES

PDRKIT30 ... 115 Color kit F6BG30IND 120 Island trim F6BG30STD 120 Standard trim 120 F6BG30HBT High back trim 121 F6BG30BCI Island trim 122 INDUKIT4 Induction plate adapters FMTRP30 122 Telescopic rack TECHNICAL DWG 239

page

276

LOUINOAL	billa
TECHNICAL	DATA

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode



SOFIA

PROFESSIONAL 30" DOUBLE OVEN

With striking beauty and bold performance, the Sofia professional double oven features dual true convection, cool touch soft-close doors, concealed bake elements, and multiple cooking modes ensures you can handle whatever culinary challenges come your way. From defrost to intensive broiling and everything in between, there is no cooking task this oven can't handle. A meat probe in the upper oven ensures perfect results for your roasts. Self-clean in each oven means your oven will remain beautiful and functional throughout its life.





SOFIA PROFESSIONAL 30"

000

30" PROFESSIONAL SINGLE OVEN - STAINLESS STEEL



4 CODE ID

F6PSP30S1



SOFIA PROFESSIONAL 30"

30" PROFESSIONAL DOUBLE OVEN - STAINLESS STEEL



SPECIFICATIONS

OVEN
Knob and electronic controls
Dual True Convection
Self-cleaning oven with Multifunction baking
Black Porcelain enamel interior
Cool to the touch soft closing door
Extra-large baking cavity and viewing area
3 Halogen lights for flawless visibility
Gross capacity 4.4 cu. ft.
2 chrome racks
1 telescopic rack
Enameled Broiler Pan

OVEN FUNCTIONS Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer

Meat Probe

Sabbath Mode

Self-Clean

OPTIONAL ACCESSORIES		page
PDRKIT30	Color kit	116
FMTRP30	Telescopic rack	122
TECHNICAL D	VG	244
TECHNICAL DATA		277

SPECIFICATIONS

OVENS Knob and electronic controls

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights per oven for flawless visibility Gross capacity 4.4 cu. ft. per oven 2 chrome racks per oven 1 telescopic rack per oven Enameled Broiler Pan

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate

Self-Clean

Sabbath Mode

OVEN FUNCTIONS

CODE ID

F6PDP30S1



•••

1 ▲山

Dual True Convection

Soft Closing Doors

Self Clean Ovens

- Multi-level cooking
- 1 Telescopic Rack per oven

Meat Probe (Upper Oven Only)





Digital Controls



 $\hat{\mathbf{o}}$

Fast Pre-Heat



OPTIONAL AC	page	
PODKIT30	Color kit upper door	116
PDRKIT30	Color kit lower door	116
NOTE:		
	hase order, remember lor kits for the upper	
FMTRP30	Telescopic rack	122
TECHNICAL DWG		244
TECHNICAL DATA		277

Electronic cooking programmer Meat Probe (Upper Oven Only)

PROFESSIONAL 30" WARMING DRAWER



More than a warming drawer, this functional appliance can slow cook, proof, leaven, and defrost in its compact and fully enclosed space. Warm plates, hold side dishes warm for serving, keep pies warm for dessert, allow homemade bread to rise to perfection.

SOFIA PROFESSIONAL 30"

30" PROFESSIONAL WARMING DRAWER - STAINLESS STEEL





SPECIFICATIONS

WARMING DRAWER 30"

DRAWER 30" FUNCT

Knob Control Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft. Convection heating system for even heat distribution All stainless steel structure Warming Temperature range; min. 86 °F up to 190 °F Slow closing assistance 2 Internal lights Non-slip rubber mat

Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 °F up to 190 °F

F6PWD30S1



Sliding Telescopic Rails

Keep Warm Function



Leavening



Slow Cooking



Thawing

Soft Closing

	OPTIONAL ACCESSORIES		page
TIONS	PWDKIT30	Color kit	117
d	TECHNICAL DWG TECHNICAL DATA		244 278

SPEED OVEN

A premium kitchen is not complete without a combi speed oven. Microwave, bake, broil, or use any of the combination cook modes to enjoy the benefits of speed cooking. Enjoy all the benefits of our combi speed steam oven without compromising the look of your Sofia built-in in appliances.

STEAM OVEN

10:22

 \odot ∇

т Т Т

@ **~** 0

0

Have you considered the benefits of cooking with steam? Steam, bake, broil, or use one of the combination cooking modes and achieve beautiful and healthy results. Enjoy all the benefits of our combi steam oven without compromising the look of your Sofia built in appliances.



NEW



30"

SPECIALTY OVENS



SOFIA PROFESSIONAL 30"

30" PROFESSIONAL COMBI SPEED OVEN

COOKING



CODE ID

4

NEW

F6PSPD30S1



SOFIA PROFESSIONAL 30"

30" PROFESSIONAL COMBI STEAM OVEN



FEATURES	PERFORMANCE
3 in 1 Oven:	10 Combined Functions
Microwave, Convection, and Combi	Automatic Cooking
Stainless Interior with broiler	Pre-selected and customizable recipes
Quick Access Menu	(weight, temperature, cooking time)
Automatic Programs	Microwave mode (6 levels)

Fan assisted mode

Combined Cooking mode

Microwave and Grill mode

Defrosting by time and weight

SPECIFICATIONS

CHNICAL DWG	
CHNICAL DATA	

FEATURES

page

245

279

3 in 1 Oven: Steam, Convection, and Combi-steam Stainless Interior with broiler Quick Access Menu Automatic Programs Meat Probe 240 Volt Connection Steam Generator

SPECIFICATIONS

PERFORMANCE

12 Functions Automatic Cooking Pre-selected and customizable recipes (weight, temperature, cooking time) Steam System Combined Cooking Functions Steam Recovery Cycle CLEAN, assisted cleaning cycle for oven interior and steam circuit

240 Volt Connection



4

CODE ID

F6PSC030S1



 \bigotimes

Steam Cooking

Steam Limescale Filter

True Convection





Meat Probe



Multi-level cooking

page

TECHNICAL DWG TECHNICAL DATA

245 279

NEW

SOFIA PROFESSIONAL ACHINE \mathbf{N}



Our built-in coffee machine is your personal barista: from storing coffee beans to grinding fresh beans for brewing, to automatically storing puck-grounds into the waste tray. Enjoy barista-style coffee, from espresso to cappuccino, and your favorite Americano at the touch of a button right at home. This easy-to-use, made in Italy, professional quality unit is the perfect complement to your Fulgor Milano cooking products. Shown here with our unique 30" Pro frame kit it matches perfectly when installed over our other 30" Sofia built-in products.

SOFIA PROFESSIONAL 30"

30" BUILT-IN COFFEE MACHINE



NOTE

The Fulgor Milano badge, included in the frame kit, is optional and its position can be decided by the installer or customer. Both codes are required and sold separately.

F7BC24B1 F6PTK30BC Coffee Machine Pro Frame Kit

SPECIFICATIONS

FEATURES

Espresso / 2 x Espresso Coffee / 2 x Coffee White coffee Latte macchiato Milk froth Warm milk Programmable Temperature Water heating Time 3 minutes Automatic cleaning cycle Stand-by (energy saving)

FUNCTIONS

3 different coffee temperature settings 5 coffee strength settings: extra-strong, strong, medium, light, extra-light 5 mug size settings: espresso, corto, medium, large, pot Cappuccino Steam and Hot water Stand-by (energy saving)

CODE ID

4

F7BC24B1 F6PTK30BC



LED Lighting

 $\hat{\mathbf{C}}$ 1 ≈

Cappuccino Maker

Programmable Temperature

Whole Beans and Ground Coffee



Automatic Coffee Grinder

page

TECHNICAL DWG TECHNICAL DATA 246 280

SAFETY

Water hardness setting Coffee and water refill indicators Ground coffee container to empty indicator Cleaning indicator Limescale filter indicator

INCLUDED ACCESSORIES

Cappuccino Maker Container for the milk Telescopic rails Power cord with plug

<image>

Style and performance are the most appropriate description for the Professional Rangetop. The combination of solid materials and efficient technologies allows us to offer versatile and functional solutions. The sturdiness of the stainless steel structure, combined with the heavy duty continuous grates of the gas versions, the perfectly matte burner basin, the steel knobs with the modulation of the maximum power levels to that for simmer cooking of the Crescendo gas burners offer those who appreciate infinite possibilities to cook recipes like a chef.

FULGOR





PRO GAS RANGETOP





searing and boiling.



CAST IRON GRATES

Built to withstand searing heat and rapid temperature changes without losing their strength, continuous cast iron grates allow pans to be easily repositioned at your convenience.


58 FULGOR MILANO



FULGOR MILANO


SOFIA RANGETOP 48" GAS

This product has all the features one would expect from a truly pro style cook top, starting with its gas powered trilaminate griddle, and 6 Crescendo dual flame burners. Each burner providing the perfect combination of power and even distribution of heat allows precise results from temper to sear with a maximum 20,000 BTUs. The combination of inner and outer burner rings are easily controlled with the pro style knobs which can allow everything from a whisper soft heat for melting or rendering chocolate, to instantly activating both rings and providing ultra high temperatures for



PORCELAIN BURNER BASIN

The elegant yet robust continuous grates sit atop the one piece burner bowl, with its smooth corners and velvet matte black porcelain finish, allowing for seamless, easy cleaning.

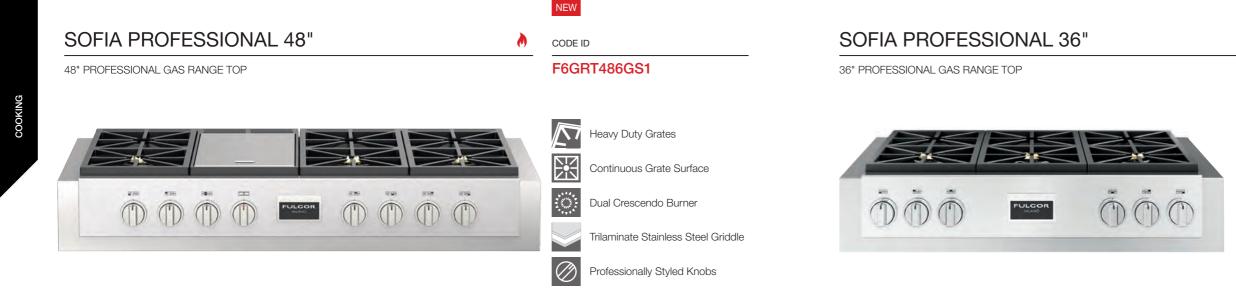

SPECIFICATIONS

GAS RANGE TOP

3 Heavy Duty, continuous cast iron grates Matte finish porcelain burner bowl Tubular Gas Burner 11,500 BTU high / 2,000 BTU low for the trilaminate griddle 6 Dual-Flame Crescendo Burners 4 X 18,000 BTU max (NG) 2 X 20,000 BTU max (NG) Natural Gas (LP convertible) Flat Griddle

OPTIONAL ACCESSORIES

page

FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG48BCI	Island trim	121
F6BG48STD	Standard trim	120
F6BG48HBT	High back trim	120
TECHNICAL DWG		241
TECHNICAL DATA		281

SPECIFICATIONS

GAS RANGE TOP

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible) Electric Re-ignition system Flame-out Sensing Top Mount Injectors ð

F6GRT366S1



Heavy Duty Grates

Continuous Grate Surface

Dual Crescendo Burner



Professionally Styled Knobs

OPTIONAL ACCESSORIES page

FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG36BCI	Island trim	121
F6BG36STD	Standard trim	120
F6BG36HBT	High back trim	120
FMGRID36	Griddle	121
F6BG36ISL	1" Island trim	121
TECHNICAL DWG		
TECHNICAL DATA		282





Heavy Duty Grates

Continuous Grate Surface

Dual Crescendo Burner

Professionally Styled Knobs

OPTIONAL ACCESSORIES

page

FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG30BCI	Island trim	121
F6BG30STD	Standard trim	120
F6BG30HBT	High back trim	120
FMGRID30	Griddle	121
F6BG30ISL	1" Island trim	121
TECHNICAL DWG		241
TECHNICAL DATA		272

2
1-1-1-1
A Frank
Constant of the
1000
1. 1. 1. 1. 1. 1.
1.1.1.1.1.1.1.1.1
The state
and the second
12.53

SPECIFICATIONS

GAS RANGE TOP

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl

4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible) Electric Re-ignition system Flame-out Sensing Top Mount Injectors



OFF

4

OFF

FULGOR MILANO

PRO INDUCTION RANGETOP



DUAL MAX POWER


Large pans receive full power for capacity and consistent heat distribution while cooking.

The 11" Dual Induction Zone offers a fifth burner for any size pan at any power level for ultimate flexibility in your 36" induction rangetop.



PROFESSIONAL STYLE KNOBS

Can a professional rangetop be called that without pro style knobs? Fulgor Milano was not willing to compromise on this expectation, while still offering all of the unique functions and technologies expected from an induction cook top.



INDUCTION SPECIFIC ISLAND TRIM

We specifically designed an elegant low profile island trim for our induction range top to match the same profile of our Sofia control panel.

The Sofia induction rangetop features powerful premium induction technology under an elegant glass surface featuring a new 11" Dual Max Power burner (36" model). The instant response and precise control of induction is highlighted by the Digital Minute Minder control, paired beautifully with the easy to clean surface, offering maximum performance while minimizing energy consumption.

FULGOR







SOFIA PROFESSIONAL 36"

36" PROFESSIONAL INDUCTION RANGE TOP





XXXX

CODE ID

F6IRT365S1



30" PROFESSIONAL INDUCTION RANGE TOP



SPECIFICATIONS

INDUCTION RANGE TOP

4 Single Induction cooking zones 1 Dual Max Power with Ø 11" cooking zone Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function Knob Controlled Digital Minute Minder Pot Detection System Child Lock Function Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time

OPTIONAL ACCESSORIES

page

F6BG36IND	Island trim	120
F6BG36STD	Standard trim	120
F6BG36HBT	High back trim	120
F6BG36BCI	Island trim	121
INDUKIT4	Induction plate adapters	122
TECHNICAL DWG		242
TECHNICAL DATA		283

SPECIFICATIONS

INDUCTION RANGE TOP

4 Single Induction cooking zones Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power on Indicators Melting and Simmering functions Pot Detection System Child Lock Function Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time

F6IRT304S1

\approx	

00:00

Easy Clean Ceramic Glass

Power Boost Burner

Pan Detection system

Digital Controls

Residual Heat Sensor



 \oslash

Warming Function

Professionally Styled Knobs



OPTIONAL ACCESSORIES		page
		100
F6BG30IND	Island trim	120
F6BG30STD	Standard trim	120
F6BG30HBT	High back trim	120
F6BG30BCI	Island trim	121
INDUKIT4	Induction plate adapters	122
TECHNICAL DWG		242
TECHNICAL DATA		283

FULGOR MILANO

SOFIA

PROGAS COOKTOP



STRONG, POWERFUL, DISTINCTIVE

With sleek lines, a continuous surface grate over powerful brass burners, and LED illuminated controls, the Sofia cooktop combines elegant design, responsive performance, and thoughtful convenience. Sofia enters a new realm with this low profile cooktop allowing design flexibility for your kitchen. Enjoy the power of a 20,000 BTUs Dual Brass Burner of this Sofia cooktop while using the additional 4 Dual Stack Burners, designed to surpass all of your expectations. New Halo Effect knobs let you know at a glance if the gas is on or if the cooktop was recently used, giving you peace of mind at every turn. Continuous cast iron grates offer an even cooking surface for easy movement of pans from burner to burner so that even your biggest cooking events can be handled with ease.



HALO VISION HEAT MADE VISIBLE



HALO CONTROL for when the gas is on

Have you ever walked away from your cooktop forgetting a burner is on?

Whether you are searing a steak or tempering chocolate, the glowing halo of white light will alert you to a burner that is on. Walk away from the kitchen with confidence, knowing that your burners are safely off when the halo disappears.






A Professional cooktop would not be complete without powerful burners and strong cast iron grates. These grates can continue to radiate a heat, even after the burner is off. Protect yourself and your family with our Halo Safe system. A red Halo light around the control knob indicates the presence of residual heat at the grate.



HALO SAFE residual heat indicator

SOFIA PROFESSIONAL 36"

36" PROFESSIONAL PRO GAS COOKTOP

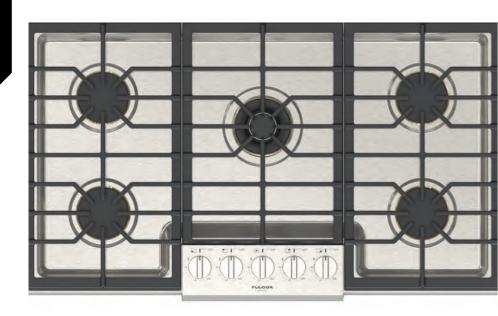



ð

CODE ID

F6PGK365S1

SOFIA PROFESSIONAL 30"

30" PROFESSIONAL PRO GAS COOKTOP





SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Solid Brass Dual Flame Burner with 20.000 BTU Max (NG) 4 Solid Brass Stacked Burners with 15.000 BTU Max (NG) Backlit Control Knob indicates burner operation (White) Backlit Control Knob indicates residual heat (Red) Heavy duty control panel Large cooking area Full pot stability Natural Gas (LP Convertible)



OPTIONAL ACCESSORIES		page
FMWOK FMSIM	Wok ring Simmer plate	121 121
TECHNICAL DWG TECHNICAL DATA		253 284

SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Solid Brass Dual Flame Burner with 20.000 BTU Max (NG) 2 Solid Brass Rapid Burners with 10.500 BTU Max (NG) 2 Solid Brass Semirapid Burners with 8.000 BTU Max (NG) Backlit Control Knob indicates burner operation (White) Backlit Control Knob indicates residual heat (Red) Heavy duty control panel Large cooking area Full pot stability Natural Gas (LP Convertible) ð

F6PGK305S1





Knob control with back light system

1 Central Dual Crescendo Burner

4 Single Burners



Heavy Duty Grates



Continuous Grate Surface

Heavy Duty Control Panel





OPTIONAL ACCESSORIES

page

FMWOK	Wok ring	121
FMSIM	Simmer plate	121

NOTE:

Wok ring (FMWOK) to be used with centre burner only.

TECHNICAL DWG	243
TECHNICAL DATA	285



ACCENTO **PRO RANGE**

Inspired by traditional professional styling, our ACCENTO professional range features a classic bullnose design over elegant yet strong knob controls. The ACCENTO professional range will stand out in your kitchen with color kits that are customizable and allow for multiple variations of color expression. Newly designed continuous cast iron grids offer a safe support surface while ensuring the achievement of professional performance and optimal thermal dynamics.





ACCENTO's traditional bullnose allows this handcrafted range to be added to any package and becomes the perfect replacement range.

burner bowl allows for seamless, easy cleaning. The matte black is a perfect compliment to the grates and burner caps.



One piece matte black, porcelain Accentuate the satin stainless steel finish of the ACCENTO range with a customizable color kit of your choosing.


STYLE DETAILS

ACCENTO





Adding an "accent" of color has never been easier with Fulgor Milano's unique color kit system for the ACCENTO range. Each color kit comes with a matching door, toe kick and control panel accent trim providing endless possibilities to mix and match. If beauty is in the details, there is no question our new ACCENTO range is ready for the red carpet. From the sculpted lines of the handles and grates, to the symmetry of the lines top to bottom, no detail was overlooked.

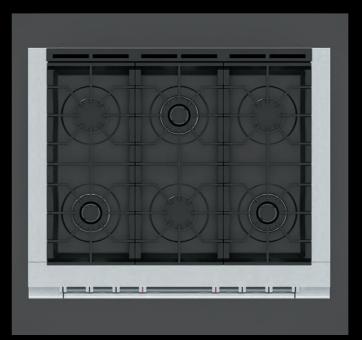







ITALIAN CRAFTSMANSHIP PROFESSIONAL PERFORMANCE





FULGOR

MILANO

ACCENTO

Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable. With the kitchen returning to the center of the home, color is an important component of design and can bring unity and harmony into your space.





ACCENTO PROFESSIONAL 36"

36" DUAL FUEL PROFESSIONAL RANGE

000



CODE ID

ð

F4PDF366S1 4



ACCENTO PROFESSIONAL 30"

30" DUAL FUEL PROFESSIONAL RANGE



OPTIONAL ACCESSORIES		page
ACDKIT36	Color kit	119
FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG36BCI	Island trim	121
F6BG36STD	Standard trim	120
F6BG36HBT	High back trim	120
FMGRID36	Griddle	121
FMTRP36	Telescopic rack	122
F6BG36ISL	1" Island trim	121

TECHNICAL DWG	240
TECHNICAL DATA	286

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Dehydrate Electronic cooking programmer Self-Clean Sabbath Mode

SPECIFICATIONS

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 2 Dual-Flame Crescendo Burners 2 X 18,000 BTU max (NG) 2 Rapid Burners 2 X 15,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks Enameled Broiler Pan

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 3 Dual-Flame Crescendo Burners 3 X 18,000 BTU max (NG) 3 Rapid Burners 3 X 15,000 BTU max(NG) Natural Gas (LP convertible)

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks Enameled Broiler Pan

ð

4


F4PDF304S1



Heavy Duty Grates


Continuous Grate Surface

Dual Crescendo Burner



•••

Self Clean Oven





Digital Controls

OPTIONAL ACCESSORIES		page
ACDKIT30	Color kit	119
FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG30BCI	Island trim	121
F6BG30STD	Standard trim	120
F6BG30HBT	High back trim	120
FMGRID30	Griddle	121
FMTR630	Telescopic rack	122
F6BG30ISL	1" Island trim	121

TECHNICAL DWG	240
TECHNICAL DATA	287

OVEN FUNCTIONS


Bake Broil Roast Convection True Convection Dehydrate Electronic cooking programmer Self-Clean Sabbath Mode

ACCENTO PROFESSIONAL 36"

36" ALL GAS PROFESSIONAL RANGE

COO





ð

λ

CODE ID

F4PGR366S2

ACCENTO PROFESSIONAL 30"

30" ALL GAS PROFESSIONAL RANGE



OPTIONAL ACCESSORIES		page
ACDKIT36	Color kit	119
FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG36BCI	Island trim	121
F6BG36STD	Standard trim	120
F6BG36HBT	High back trim	120
FMGRID36	Griddle	121
FMTRP36	Telescopic rack	122
F6BG36ISL	1" Island trim	121

TECHNICAL DWG	240
TECHNICAL DATA	288

OVEN FUNCTIONS

Bake Broil Convection Dehydrate Timer

SPECIFICATIONS

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 2 Dual-Flame Crescendo Burners 2 X 18,000 BTU max (NG) 2 Rapid Burners 2 X 15,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual Convection Black Porcelain enamel interior Cool to the touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks Enameled Grill set

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 3 Dual-Flame Crescendo Burners 3 X 18,000 BTU max (NG) 3 Rapid Burners 3 X 15,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual Convection Black Porcelain enamel interior Cool to the touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks Enameled Grill set

ð

λ

F4PGR304S2



Heavy Duty Grates

Continuous Grate Surface

Dual Crescendo Burner



Dual Convection



0

Cool Touch Door

Multi-level cooking

Digital minute minder

OPTIONAL ACCESSORIES	page

ACDKIT30	Color kit	119
FMWOK	Wok ring	121
FMSIM	Simmer plate	121
F6BG30BCI	Island trim	121
F6BG30STD	Standard trim	120
F6BG30HBT	High back trim	120
FMGRID30	Griddle	121
FMTR630	Telescopic rack	122
F6BG30ISL	1" Island trim	121

TECHNICAL DWG	240
TECHNICAL DATA	289

OVEN FUNCTIONS

Bake Broil Convection Dehydrate Timer



SOFIA PRO REFRIGERATION & WINE

COLD TEMP. TOTAL CONTROL

As beautiful as it is functional, the Sofia Professional Refrigeration and Wine Series features brushed stainless exteriors for maximum impact and a brilliant white aluminum interior. Food preservation is key and like the rest of the Professional Series, we combine the latest technology to ensure the highest performance. Dual compressors provide independently controlled cooling zones with consistent and precise temperatures throughout, to ensure that the finest foods and wines stay fresher longer.

Robust doors on the Refrigerator and triple layer UV protected glass on the Wine Cellar protect contents from external temperature and humidity changes which can be damaging to your stored items.

PRO REFRIGERATION & WINE







Refrigeration, Fresco, or Freezer: you can decide on a whim! Need more space for cold drinks? Turn the bottom Flexzone drawer into a Fresco compartment through a simple menu. You have the flexibility to manage your food preservation how you desire.

ICE MAKER

Located in the upper section of the Flexzone drawer, the ice maker uses purified water from the integrated filtering system to produce up to 2.2 lbs of your desired sized cube. Activate Superlce and increase ice production to 3.3 lbs.

WINE CELLAR

Natural beechwood shelves accommodate various sized bottles for secure storage and can even be completely removed for greater flexibility. In addition to humidity and temperature control, Wine Cellars utilize anti-vibration technology and triple pane bronze glass doors to reduce UV rays, protecting your wine collection from external conditions.



SOFIA PROFESSIONAL WINE CELLAR 24"

24" PROFESSIONAL WINE CELLAR







SOFIA PROFESSIONAL FRIDGE 36"

36" PROFESSIONAL FRIDGE



SPECIFICATIONS

WINE CELLAR

Cave Storage Compartment Natural Wood Shelves for 36 bottles Wine Cellar Compartment Natural Wood Shelves for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting Brilliant white aluminium interior FlexZone Bottom Drawer

OPTIONAL ACCESSORIES	page
REFSBSPRO60 Coupling kit with a 36" fridge	124
TECHNICAL DWG	250
TECHNICAL DATA	293

SPECIFICATIONS

FRIDGE

Refrigeration Compartment Flexzone Bottom Drawer Total No Frost Stainless Steel Crisper Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior

CODE ID

F7PBM36S1-R (RIGHT HINGE)

CODE ID

F7PBM36S1-L (LEFT HINGE)

∇

RIGHT HINGE



LEFT HINGE



Cool Zone 0°C

- Deep-freezing
- \bigotimes Hot air ventilation



** *

**

AP*

*

Total No Frost

Rapid Deep Freezing

∼¦∼ LED lighting

Noise Level 41 (dB)

Freestanding Installation

Holiday Mode

Ice Maker

OPTIONAL ACCESSORIES page REFSBSPRO60 124 Coupling kit with a 24" wine cellar REFSBSPR072 Two 36" Fridges coupling kit 124 **TECHNICAL DWG** 250 **TECHNICAL DATA** 292

BUILT-IN WINE CELLAR 24"

24" PROFESSIONAL BUILT-IN WINE CELLAR



F7IBW24O1-R (RIGHTHINGE) CODE ID F7IBW24O1-L (LEFT HINGE) **RIGHT HINGE**





OPTIONAL ACCESSORIES page REFHANDPRO24 Sofia Wine Cellar Pro Handle Kit REFSBSINT60 Coupling kit TECHNICAL DWG **TECHNICAL DATA**

BUILT-IN FRIDGE 36"

36" PROFESSIONAL BUILT-IN FRIDGE



SPECIFICATIONS

WINE CELLAR
Overlay Panel
Cave Storage Compartment
Natural Wood Shelves for 36 bottles
Wine Cellar Compartment
Natural Wood Shelves for 18 bottles
TriplePlay Refrigeration
Total No Frost
LED Lighting
Brilliant white aluminium interior
FlexZone Bottom Drawer

SPECIFICATIONS

FRIDGE

124

124

251

293

Overlay Panel
Refrigeration Compartment
Flexzone Bottom Drawer
Total No Frost
Stainless Steel Crisper Drawers
Ice Maker with ice tray
LED Lighting
Brilliant white aluminium interior

CODE ID

F7IBM36O1-R (RIGHT HINGE)

CODE ID

F7IBM36O1-L (LEFT HINGE)



RIGHT HINGE



LEFT HINGE

0 C° ₩≛*₫* **

Cool Zone 0°C	

- Deep-freezing
- \mathfrak{R} Hot air ventilation



æ*

- Total No Frost
- Rapid Deep Freezing
- $\overline{\sim_{i}} \overline{\sim}$ LED lighting
- *** Noise Level 41 (dB)
 - Integrated Installation
 - Holiday Mode
- * Ice Maker



OPTIONAL ACCESSORIES	page
REFHANDPRO36 Sofia Fridge Pro Handle Kit	124
REFSBSINT60 Coupling kit	124
TECHNICAL DWG TECHNICAL DATA	251 292

36" FRENCHDOOR REFRIGERATOR

The Fulgor Milano freestanding counter depth French-door unit opens wide to reveal features like an internal water dispenser, adjustable fresh zone drawer, tri-level slide-out freezer baskets and self-closing freezer drawer.



Once the Pro Handle Kit with Pro Fulgor Milano badge is installed, our counter-depth french door fridge is a perfect complement to any of our professional ranges or professional built-in cooking appliances.

111



COUNTER-DEPTH STYLE

Limited on space and can't fit a full height built-in fridge, or simply want to have the look without blowing the budget? The new Fulgor Milano counter-depth fridge allows you to achieve a beautiful look without compromise.

36" FRENCH DOOR FRIDGE

36" FRENCH DOOR FRIDGE SHOWN WITH PRO HANDLE KIT



SPECIFICATIONS

FRIDGE

Duo Cycling Cooling Ion Fresh Inner Digital Display Sabbath Mode Large Pantry Drawer Height Adjustable Cantilever Shelves Interior Filtered Water Dispenser Interior Theatre Lighting with LED lights

FREEZER FEATURES

Automatic Ice Machine Large Freezer Drawer

F6FBM36S2 F6HK36FFBS



Fingerprint-Proof Stainless Steel

ION Fresh



LED Lighting



Total No Frost

 A^*

Holiday Mode

NOTE:

The Fulgor Milano badge, included in the Pro Handle Kit, is optional and its position can be decided by the installer or by the customer.

F6FBM36S2 F6HK36FFBS French Door Fridge Pro Handle Kit



 REQUIRED ACCESSORIES	page
F6HK36FFBS Sofia French Door Pro Handle Kit	125
TECHNICAL DWG TECHNICAL DATA	252 294



FULGOR MILANO

SOFIA PRO VENTILATION

Complete your powerful Sofia cooking suite with a matching wall mounted ventilation hood designed to keep your kitchen environment free from smoke, cooking residue, and excess heat. The dual motor, in a sturdy housing, combines with Pro Baffle filters to quietly whisk away the effects of your culinary adventures. Your hood allows fresh air to circulate freely in your home, while overhead LED illumination highlights evenly your Sofia cooking surface.

To ensure full control of your hood, we have designed this appliance to be controlled with the aid of Professional control knobs. Like jewelry for your home, Sofia's ventilation hoods offer the very best of function and design. Your well ventilated kitchen will thank you for it!







LED LIGHTING UNIFORM CONTROLS

To get the best possible view of your culinary creations while you work, illuminate the entire cooking surface with 6 high powered LED lights. When you are finished cooking, Sofia can bask in the lower level lighting, casting your kitchen as the star of your home.

ADJUSTABLE DUAL MOTORS WITH DIRECT INDIVIDUAL MOTOR CONTROL

At the heart of the hood, dual motors are housed separately in sturdy bodies, keeping noise and vibration to a minimum. Quiet enough to be unnoticed even at its maximum 1000 CFM speed, the hood works hard to whisk away heat, smoke, odor and moisture, keeping your kitchen fresh and clean while you entertain your family and friends.







SOFIA PROFESSIONAL SERIES 600 48"

48" PROFESSIONAL HOOD



SPECIFICATIONS

HOOD

Scotch brite stainless steel Heavy Duty Control Panel with Knobs 4 + 4 Speed Mechanical Control LED lighting Led 6x1,2 W - 3200 K Double fan motors 1000 CFM 75 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm



4

F6PH48DS1

111	Filt
<u> ၂</u> ၂၉	10
775	6 L
***	No
Ļ	Wa

Filtering

1000 CFM

6 LED lamps

Noise Level 75 (dB)


Wall hung installation

OPTIONAL ACCESSORIES		page
F6CK48-12 FMFIL	Chimney cover Charcoal filter	123 123
TECHNICAL DWG TECHNICAL DATA		246 290

SOFIA PROFESSIONAL 600 SERIES 36"

36" PROFESSIONAL HOOD





4





SOFIA PROFESSIONAL 600 SERIES 30"

30" PROFESSIONAL HOOD

SPECIFICATIONS

HOOD F6PH36DS1

Scotch brite stainless steel Heavy Duty Control Panel with Knobs 4 + 4 Speed - Mechanical Control LED lighting: Led 2x1.2 W - 3200 K Dual fan motors 1000 CFM 75 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

HOOD F6PH36S1

Scotch brite stainless steel Slider controls LED lighting: Led 2x1.2 W - 3200 K One fan motor 600 CFM 72 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

OPTIONAL ACCESSORIES

page

F6CK36-12	Chimney cover	123
FMFIL	Charcoal filter	123
TECHNICAL DWG		247 290

SPECIFICATIONS

HOOD F6PH3	30S2	н
4 Speed - Med LED lighting: L One fan motor 600 CFM 72 dB sound r	ontrol Panel with Knobs chanical Control ed 2x1.2 W - 3200 K	Si Si Ci 60 72 Bi
Baffle filter Minimum dista	ince:	Μ
	20 1/2" - 52 cm 24 3/4" - 63 cm	-

HOOD F6PH30S1

Scotch brite stainless steel Slider controls LED lighting: Led 2x1.2 W - 3200 K One fan motor 600 CFM 72 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

F6PH30S1



600 CFM

Noise Level 72 (dB)

1 FAN - SLIDER

Wall hung installation

CODE ID

F6PH30S2

1 FAN - KNOBS

111	Filtering
নি	600 CFM
	4 LED lamps
**	Noise Level 72 (dB)
Ŀ	Wall hung installation




 OPTIONAL ACCES	SSORIES	page
F6CK30-12 FMFIL	Chimney cover Charcoal filter	123 123
TECHNICAL DWG TECHNICAL DATA		247 290

SOFIA PROFESSIONAL CHIMNEY HOOD

48" PROFESSIONAL WALL-MOUNT HOOD





NEW

CODE ID

F6PC48DS1

4

SOFIA PROFESSIONAL CHIMNEY HOOD

36" PROFESSIONAL WALL-MOUNT HOOD



VENTILATION

SPECIFICATIONS	OPTIONAL ACCESSORIES page		
WALL-MOUNT HOOD	FMFIL Charcoal filt	er 123	
Scotch brite stainless steel			
Heavy-Duty Control Panel with 3 Knobs	TECHNICAL DWG	248	
3 + 3 Speed Settings	TECHNICAL DATA	291	
LED lighting			
Led 6x1,2 W - 3200 K			
Double fan motors			
1000 CFM			
75 dB sound rating			
Baffle filter			
Minimum distance:			
- Electric hob 21" - 53 cm			
- Gas hob 25" - 63 cm			

SPECIFICATIONS

WALL-MOUNT HOOD

Scotch brite stainless steel Heavy Duty Control Panel with 3 Knobs 3 + 3 Speed Settings LED lighting Led 4x1,2 W - 3200 K Double fan motors 1000 CFM 75 dB sound rating Baffle filter Minimum distance: - Electric hob 20" - 51 cm - Gas hob 25" - 63 cm

SPECIFICATIONS



4

CODE ID

F6PC36DS1



Filtering

1000 CFM

6 LED lamps

HH.

Wall hung installation

Noise Level 75 (dB)

OPTIONAL ACCESSORIES pa		page
FMFIL	Charcoal filter	123
TECHNICAL DWG 248 TECHNICAL DATA 291		

SOFIA PROFESSIONAL 600 SERIES 48"

48" PROFESSIONAL INSERT HOOD

ATION



SOFIA PROFESSIONAL 600 SERIES 36"

36" PROFESSIONAL INSERT HOOD



Overall dim - width

Overall dim - height

Overall dim - depth

Cut out (wxd)

Cut out (wxd)

Gross weight

Net weight

KW rating

Power cord + Plug

45-3/4" -116 cm

13-1/8" - 33 cm

18-1/2" - 47 cm

43-7/16" x 16-1/2" 110.3 x 41.9 cm

68 lbs - 31 kg

57 lbs - 26 kg

540 W 4.70 A



SPECIFICATIONS

OPTIONAL ACCESSORIES page	OPTIONAL	IES pag	е
---------------------------	----------	---------	---

FMFIL	Charcoal filter	123
TECHNICAL DWG TECHNICAL DATA		249 291

SPECIFICATIONS

INSERT HOOD	
-------------	--

Scotch brite stainless steel	Overall dim - width
Heavy Duty Control Panel with Knobs	Overall dim - height
LED lighting: Led 4x1,2 W - 3200 K	Overall dim - depth
4 + 4 Speed - Mechanical Control	Cut out
Baffle filter	Cut out
Dual fan motors - 1000 CFM	Gross weight
75 dB sound rating	Net weight
Minimum distance:	KW rating
- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm	Power cord + Plug

INSERT HOOD
Scotch brite stainless steel Heavy Duty Control Panel with Knobs LED lighting: Led 6x1,2 W - 3200 K 4 + 4 Speed - Mechanical Control
Baffle filter Dual fan motors - 1000 CFM 75 dB sound rating
Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

F6BP34DS1



Filtering

1000 CFM

4 LED lamps

Noise Level 75 (dB)

Ceiling installation

	OPTIONAL ACCES	SORIES	page
	FMFIL	Charcoal filter	123
34-1/4" - 87 cm			
13-1/8" - 33 cm	TECHNICAL DWG		249
18-1/2" - 47 cm	TECHNICAL DATA		281
32-1/16" x 16-1/2"			
81.4 x 41.9 cm			

60 lbs 27 kg

51 lbs - 23 kg

540 W 4.70 A

24" DISHWASHER





HANDLE KIT

We designed a professional handle with a style and presence unique to her name, for a design that is elegant and distinctive.



WASH SYSTEM

The wash system automatically adjusts the water volume, pressure, and temperature according to load size, soil levels, and program setting.



FUNCTIONS

Washing programs of your dishwasher are designed to obtain the best cleaning effect, considering the type of the soiling, soiling degree and properties of the dishes to be washed.

24" DISHWASHER

24" STAINLESS STEEL BUILT-IN DISHWASHER SHOWN WITH PRO HANDLE KIT



SPECIFICATIONS

DISHWASHER

16 Place Settings 6 Programs 45 dB Silent Operations Flexible Rack Loading All-In-One single tablet Detergent Function Fast Function 5 Level Wash Flow-Through Heater 3 way Euro Filtering System Front Adjustable rear feet Adjustable Hinge System Built-in High Loop with Air Gap Double Motion Float System

4

CODE ID

F6DWT24SS2 F6UHK24DISH



Noise Level 45 (dB)

 \square TITT Fast Wash Cycle





1/2 Load Cycle

Flexible Rack Loading

NOTE:

The Fulgor Milano badge, included in the Pro Handle Kit, is optional and its position can be decided by the installer or by the customer.

F6DWT24SS2 F6UHK24DISH

Dishwasher Pro Handle Kit



REQUIRED ACCESSORIES	page
F6UHK24DISH Sofia Dishwasher Pro Handle Kit	125
TECHNICAL DWG	252
TECHNICAL DATA	295



PROFESSIONAL OPTIONAL ACCESSIONAL



108 FULGOR MILANO



COLOR KIT



PERSONALIZE WITH COLOR

Your cooking style is personal and now you can easily personalize your kitchen with color. Dress Sofia in vibrant Venetian Red, snowy Palladio White, glistening Gondola Black, sumptuous Black Velvet, or glistening Rialto Grey. With a Sofia Color Kit, making a change is a breeze, simply replace the door and one piece toe-kick whenever the mood strikes you. Sofia can even change with the seasons to make your kitchen alive with color.

FREEDOM TO CHOOSE COLOR



FULGOR

CANOVA WHITE



48" PROFESSIONAL RANGE - COLOR DOOR KITS

OPTIONAL ACCESSORIES

36"- 30" PROFESSIONAL RANGE - COLOR DOOR KITS



48" PRO RANGE DOOR CODE PDRKIT48BK





PALLADIO WHITE	GLOSSY WHITE - RAL 9016
48" PRO RANGE DOOR	CODE PDRKIT48WH



48" PRO RANGE DOOR

CODE PDRKIT48MB



48" PRO RANGE DOOR

CODE PDRKIT48RD



48" PRO RANGE DOOR

CODE PDRKIT48MW



GONDOLA BLACK GLOSSY BLACK - RAL 9004

36" PRO RANGE DOOR 30" PRO RANGE DOOR CODE PDRKIT36BK CODE PDRKIT30BK



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

36" PRO RANGE DOOR 30" PRO RANGE DOOR CODE PDRKIT36MG CODE PDRKIT30MG



PALLADIO WHITE GLOSSY WHITE - RAL 9016 36" PRO RANGE DOOR CODE PDRKIT36WH 30" PRO RANGE DOOR CODE PDRKIT30WH

MATTE BLACK - RAL 9004

OPTIONAL ACCESSORIES

CODE PDRKIT30MB

CODE PDRKIT36MB

36" PRO RANGE DOOR 30" PRO RANGE DOOR

BLACK VELVET

1

m

VENETIAN RED

GLOSSY RED - RAL 3003

CODE PDRKIT36RD

36" PRO RANGE DOOR 30" PRO RANGE DOOR

CANOVA WHITE

36" PRO RANGE DOOR 30" PRO RANGE DOOR



CODE PDRKIT36MW CODE PDRKIT30MW



FULCOR



30" PRO DOUBLE OVEN - COLOR DOOR KITS

OPTIONAL ACCESSORIES

30" WARMING DRAWERS - COLOR KIT

For color kit purchase order, remember to order both color kits for the upper and lower door.



GONDOLA BLACK GLOSSY BLACK - RAL 9004

30" Pro Upper Door 30" Pro Range Lower Door CODE PODKIT30BK



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

30" Pro Upper Door30" Pro Range Lower Door





30" Pro Upper Door30" Pro Range Lower Door

CODE PODKIT30WH CODE PDRKIT30WH

GLOSSY WHITE - RAL 9016



BLACK VELVET MATTE BLACK - RAL 9004

30" Pro Upper Door 30" Pro Range Lower Door CODE PODKIT30MB



VENETIAN RED

GLOSSY RED - RAL 3003

30" Pro Upper Door 30" Pro Range Lower Door CODE PODKIT30RD CODE PDRKIT30RD



CANOVA WHITE MATTE WHITE - RAL 9016

30" Pro Upper Door 30" Pro Range Lower Door

CODE PODKIT30MW CODE PDRKIT30MW



 GONDOLA BLACK
 GLOSSY BLACK - RAL 9004

 30" Warming Drawers
 CODE PWDKIT30BK



 RIALTO GREY
 MATTE GREY - RAL 9007 "SLATE"

 30" Warming Drawers
 CODE PWDKIT30MG



PALLADIO WHITE	GLOSSY WHITE - RAL 9016
30" Warming Drawers	CODE PWDKIT30WH



BLACK VELVET

MATTE BLACK - RAL 9004

30" Warming Drawers

CODE PWDKIT30MB



VENETIAN RED

GLOSSY RED - RAL 3003

30" Warming Drawers

CODE PWDKIT30RD



CANOVA WHITE

MATTE WHITE - RAL 9016

30" Warming Drawers

CODE PWDKIT30MW

FULGOR MILANO

ACCENTO

THE BEAUTY)FTTA JAN ESIGN **IN COLOR**

Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable. With the kitchen returning to the center of the home, color is an important component of design and can bring unity and haramony into your space.

36"- 30" ACCENTO RANGES - COLOR DOOR KITS



VENETIAN RED GLOSSY RED - RAL 3003 36" ACCENTO RANGE DOOR CODE ACDKIT36RD CODE ACDKIT30RD 30" ACCENTO RANGE DOOR



CANOVA WHITE

MATTE WHITE - RAL 9016

36" ACCENTO RANGE DOOR CODE ACDKIT36MW 30" ACCENTO RANGE DOOR CODE ACDKIT30MW





BLACK VELVET

36" ACCENTO RANGE DOOR 30" ACCENTO RANGE DOOR CODE ACDKIT30MB

MATTE BLACK - RAL 9004

CODE ACDKIT36MB

PROFESSIONAL BACK GUARD TRIM


OPTIONAL ACCESSORIES

CODE F6BG48HBT





CODE F6BG36ISL 36" Stainless Steel - 1" High Island Trim 30" Stainless Steel - 1" High Island Trim CODE F6BG30ISL



CODE F6BG30BCI



36" Back Guard - 3" Standard Trim

48" Back Guard - 3" Standard Trim

CODE F6BG36STD

CODE F6BG48STD




36" Back Guard - 9" High Back Trim

30" Back Guard - 9" High Back Trim

48" Back Guard - 9" High Back Trim

CODE F6BG36HBT

CODE F6BG30HBT





36" Heavy duty enameled Cast-Iron griddle

CODE FMGRID36



36" Back Guard – Ind. Low Profile Island Trim CODE F6BG36IND




30" Back Guard – Ind. Low Profile Island Trim CODE **F6BG30IND**



WOK RING


CODE FMWOK

For best results with a wok, use this accessory with high-BTU burner specifically creactiveed for wok cooking.




30" Back Guard - 3" Standard Trim





48" Black Cast Iron - Low Profile Island Trim 36" Black Cast Iron - Low Profile Island Trim CODE F6BG48BCI CODE F6BG36BCI



30" Heavy duty enameled Cast-Iron griddle

CODE FMGRID30



SIMMER PLATE

CODE FMSIM

The cast-iron simmer plate provides a steady simmer temperature, evenly distributed across a stable heating surface

PROFESSIONAL HOODS



36" Telescopic rackCODE FMTRP36Telescopic rack for 36" Professional range



30" Telescopic rack CODE **FMTRP30** Telescopic rack for 30" Professional range and built-in oven




Chimney cover for model F6PH48DS1 - 12" high

CODE F6CK48-12



18" Telescopic rack CODE **FMTRP18** Telescopic rack for 18" Oven on 48" Professional range

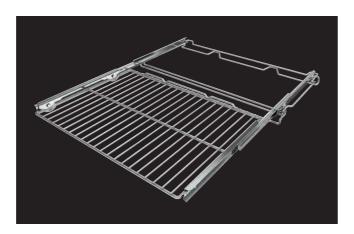

30" Telescopic Oven Rack

CODE FMTR630

PROFESSIONAL INDUCTION



Trilaminate magnetic plates for non induction pots CODE INDUKIT4

OPTIONAL ACCESSORIES



Chimney cover for model F6PH30S1 and F6PH30S2 - 12" high CODE F6CK30-12



Chimney cover for model F6PH36S1 and F6PH36DS1 - 12" high CODE F6CK36-12



Charcoal filters (for recirculating installations)

CODE FMFIL


PROFESSIONAL REFRIGERATION / WINE COOLER


OPTIONAL ACCESSORIES

REFRIGERATION

Professional Pro Handle Kit

CODE F6UHK24DISH

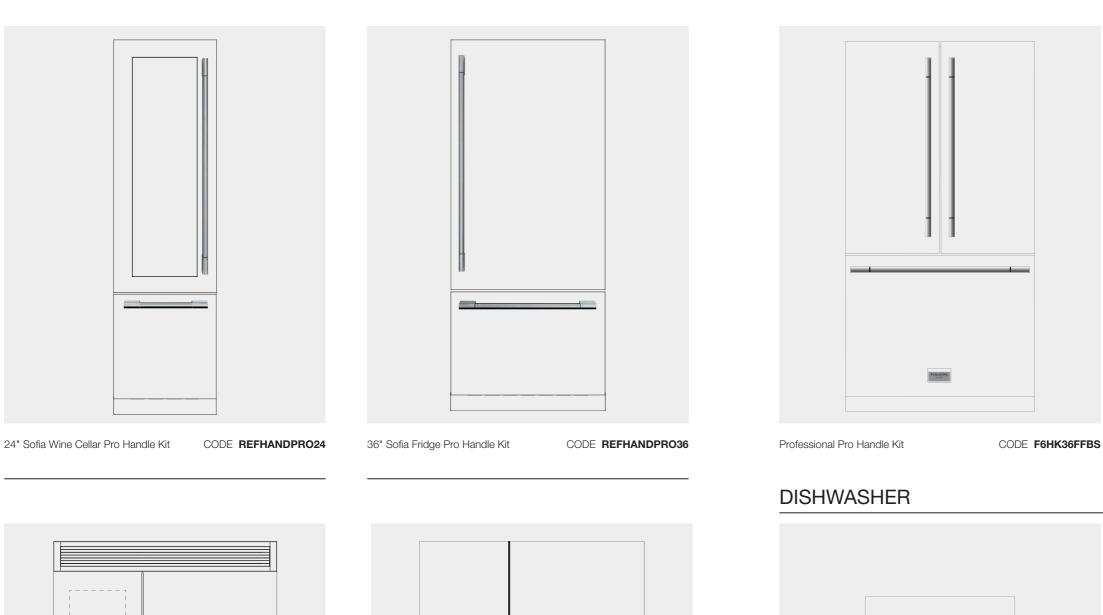




36" Pro Fridge and 24" Pro Wine Cellar Installation Kit; Top Grate, Toe Kick, Vertical Gasket Strip and Insulation Panel.

CODE REFSBSPRO60

Two 36" Pro Fridges Installation Kit; Top Grate, Toe Kick, VerticalGasket Strip and Insulation Panel.CODE REFSBSPR072

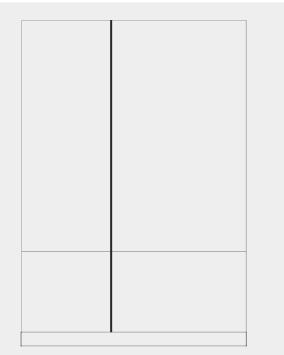

36" Built-In Fridge and 24" Built-In Wine Cellar Installation Kit.

CODE REFSBSINT60

124 FULGOR MILANO

OPTIONAL ACCESSORIES

DISTINT IN





CREATE, IMAGINE, LIVE



FULGOR MILANO DISTINTO LINE

This powerful line of products that has, in essence, modularity and the linear stroke of its distinctive features. Like a chef who moves with ease and grace in the kitchen, intuitive displays allow simple recall of recipes and specialties.

The functionality of these new ovens equally matches our modern lifestyle, effortlessly allowing us to make the most of our culinary creations. This new standard is the symbol of modernity, created in Italy.









Our Creactive control system combines modern technology with simplicity. The touch screen simplifies all procedures and enhances performance by reducing energy consumption while intensifying cooking modes. The automatic function control system has safety features providing worry-free operation.



STUFFED ROAST VEAL WEIGHT ۲۶ Kg 1500g TIME 01:15 PREHEAT I 17:06



 \bigcirc

 (\mathbf{I})

TOUCH CONTROL PANEL

Everything is under your control with just a touch on the Creactive display.

INTUITIVE

It only takes a moment to easily find the desired function.

MULTITASKING

All functions help to get the best results while preparing your recipes.

CUSTOMIZABLE RECIPES

Recipes to suit every palate have been pre-programmed, but you can modify and customize them to your specific requirements.

DISTINTO OVENS CREACTIVE

OUR CREACTIVE CONTROL SYSTEM **COMBINES MODERN TECHNOLOGY WITH SIMPLICITY**

The CREACTIVE operating system combines technology with ease of use. The touch screen simplifies the programming process of the ovens and enhances performance by reducing energy consumption and increasing cooking functions.

FULGOR MILANO

CREACIVE

ASSISTED COOKING FUNCTION

CONTROL SYSTEM

No more doubts when picking the most suitable cooking function for your meals. Just select the recipe on the display and the oven will automatically initiate the best program. You can modify pre-set recipes to create your own by adjusting cooking times, weights and temperature.



MULTI-LEVEL **COOKING MODE**

Internal heat remains constant throughout the oven, while aromas and flavors are kept separate thanks to the fan assisted system.

BROIL

The most effective way to brown the exterior of a steak or roast while locking in juices to retain moisture and tenderness

BAKE

Optimal for perfect baking: flavors blend effortlessly with consistent even heat throughout the oven cavity.

PIZZA MODE 590°F

Simultaneously bake two pizzas in only two and a half minutes with the maximum temperature of 590°F (310°C).

CUSTOMIZABLE RECIPES

Cooking times and modes have been preprogrammed, but you can modify and customize your recipes to suit every palate and need.



SELF-CLEANING

The pyrolytic Self-Clean function, selected directly from the display, consists of heating the inside of the oven to very high temperatures in order to burn off any excess grease and food residue. At the end of the procedure, just wipe the remaining residue ashes with a cloth without the use of chemical detergents.

CREACTIVE **OVENS**

CREACTIVE OVEN CHARACTERISTICS







EXTRA LARGE CAVITY

Imagine the efficiency of being able to use multiple levels of a huge oven at once. We consider it an advantage, don't you?

HALOGEN LIGHTS

The 700 series ovens have 3 20-watt halogen lights that provide plenty of light for easy viewing.

CONCEALED **BAKE ELEMENTS**

The concealed heating element and large broiler make it possible to cook and save energy at the same time.

SAFETY FEATURE: COOL TOUCH DOOR

Rest assured, your hands are safe with us. Our cool-door technology has a proven guarantee.

PYROLYTIC SELF-CLEAN

Simple, hassle free cleaning. At the end of the self-clean cycle, simply wipe away residue with a damp cloth

TELESCOPIC RACK

Our fully retractable telescopic rack makes accessibility to your cooking more convenient.

DISTINTO OVEN CREACTIVE 700 SERIES

A modern workhorse that marries style and innovation. With many preset cooking functions, the 700 series ovens help you prepare your meals with efficiency and ease. Child safety locks and cool touch doors ensure you and your family will be protected from high temperatures while cooking and during the self clean cycle. This series offers a versatile self clean mode, a dual convection system for high quality performance and an oversized oven space for big results. With 5 broil levels and a selection of accessories available to you, the 700 series ovens deliver both luxury and convenience.





OVEN 700 SERIES 30"

30" TOUCH CONTROL SINGLE OVEN - STAINLESS STEEL





4

CODE ID

F7SP30S1

OVEN 700 SERIES 30"

30" TOUCH CONTROL DOUBLE OVEN - STAINLESS STEEL



G
z
$\overline{\mathbf{Z}}$
ō
Ó
Ó.

SPECIFICATIONS **OPTIONAL ACCESSORIES** FMTR630 OVEN **OVEN FUNCTIONS** 30" Telesc. Rack Creactive Touch Control System Bake (cooking group) **TECHNICAL DWG** Dual True Convection Broil Self-cleaning oven with Multifunction baking Convection (cooking group) **TECHNICAL DATA** Black Porcelain enamel interior Keep Warm (cooking group) Cool to the touch Recipes Extra-large baking cavity and viewing area Classic Pizza Function 590°F 3 Halogen lights for flawless visibility Preset default temperature Gross capacity 4.4 cu. ft. Preheat (display instantaneous temperature) 2 chrome racks Fast Preheat Mode Sabbath Mode 1 telescopic rack Enameled Broiler Pan Setting Temperature °C/°F Setting Weight Kg/lb Lock Keys

Event Logs (for Service)

Meat Probe

Self-Clean

SPECIFICATIONS

page

233

254

298

OVENS

Creactive Touch Control System Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks per oven 1 telescopic rack per oven Enameled Broiler Pan Lock Keys Door Lock

OVEN FUNCTIONS

Bake (cooking group) Broil Convection (cooking group) Keep Warm (cooking group Recipes Classic Pizza Function 590° Preset default temperature Preheat (display instantaneous temperature) Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service) Meat Probe (only upper oven) Self-Clean

Door Lock

4

F7DP30S1



	OPTIONAL ACCESSORIES		page
	FMTR630	30" Telesc. Rack	233
o) (q		TECHNICAL DWG TECHNICAL DATA	
)°F			

OVEN 700 SERIES 30"

30" TOUCH CONTROL SINGLE OVEN - BLACK GLASS





4

CODE ID

F7SP30B1

OVEN 700 SERIES 30"

30" TOUCH CONTROL DOUBLE OVEN - BLACK GLASS



(2	
ŝ		
ŝ		
(С	
(С)
(

TIONO

SPECIFICATIONS		OPTIONAL ACCESSORIES		page
OVEN	OVEN FUNCTIONS	FMTR630	30" Telesc. Rack	233
Creactive Touch Control System	Bake (cooking group)			
Dual True Convection	Broil	TECHNICAL	DWG	254
Self-cleaning oven with Multifunction baking	Convection (cooking group)	TECHNICAL	DATA	298
Black Porcelain enamel interior	Keep Warm (cooking group)			
Cool to the touch	Recipes			
Extra-large baking cavity and viewing area	Classic Pizza Function 590°F			
3 Halogen lights for flawless visibility	Preset default temperature			
Gross capacity 4.4 cu. ft.	Preheat (display instantaneous temperature)			
2 chrome racks	Fast Preheat Mode			
1 telescopic rack	Sabbath Mode			
Enameled Broiler Pan	Setting Temperature °C/°F			
Lock Keys	Setting Weight Kg/lb			
Door Lock	Event Logs (for Service)			
	Meat Probe			
	Self-Clean			

SPECIFICATIONS

OVENS Creactive Touch Control System Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks per oven 1 telescopic rack per oven Enameled Broiler Pan Lock Keys Door Lock

OVEN FUNCTIONS Bake (cooking group) Broil Convection (cooking group) Keep Warm (cooking group) Recipes Classic Pizza Function 590° Preset default temperature Preheat (display instantaneous temperature) Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service) Meat Probe (only upper oven) Self-Clean

4

F7DP30B1




	OPTIONAL ACCESSORIES		
	FMTR630	30" Telesc. Rack	233
)))	TECHNICAL DA		254 299
٥°F			

OVEN 700 SERIES 30"

30" TOUCH CONTROL SINGLE OVEN - WHITE GLASS



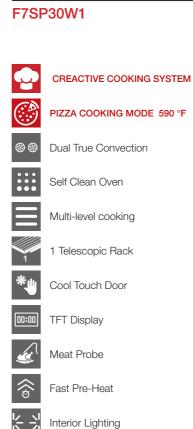

4

CODE ID

OVEN 700 SERIES 30"

30" TOUCH CONTROL DOUBLE OVEN - WHITE GLASS



G
z
$\overline{\mathbf{z}}$
ō
õ
õ

SPECIFICATIONS		OPTIONAL A	CCESSORIES	page
OVEN	OVEN FUNCTIONS	FMTR630	30" Telesc. Rack	233
Creactive Touch Control System	Bake (cooking group)			
Dual True Convection	Broil	TECHNICAL	DWG	254
Self-cleaning oven with Multifunction baking	Convection (cooking group)	TECHNICAL	DATA	298
Black Porcelain enamel interior	Keep Warm (cooking group)			
Cool to the touch	Recipes			
Extra-large baking cavity and viewing area	Classic Pizza Function 590°F			
3 Halogen lights for flawless visibility	Preset default temperature			
Gross capacity 4.4 cu. ft.	Preheat (display instantaneous temperature)			
2 chrome racks	Fast Preheat Mode			
1 telescopic rack	Sabbath Mode			
Enameled Broiler Pan	Setting Temperature °C/°F			
Lock Keys	Setting Weight Kg/lb			
Door Lock	Event Logs (for Service)			
	Meat Probe			
	Self-Clean			

SPECIFICATIONS

OVENS

Creactive Touch Control System Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks per oven 1 telescopic rack per oven Enameled Broiler Pan Lock Keys Door Lock

OVEN FUNCTIONS Bake (cooking group) Broil Convection (cooking group) Keep Warm (cooking group) Recipes Classic Pizza Function 590°F Preset default temperature Preheat (display instantaneous temperature) Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service) Meat Probe (only upper oven) Self-Clean

4

F7DP30W1

Q	CREACTIVE COOKING SYSTEM
	PIZZA COOKING MODE 590 °F
® ®	Dual True Convection
•••	Self Clean Oven
	Multi-level cooking
	1 Telescopic Rack per oven
*	Cool Touch Door
00:00	TFT Display
<u>E</u>	Meat Probe
ŝ	Fast Pre-Heat
~ >	Interior Lighting

	OPTIONAL ACCESSORIES		page
	FMTR630	30" Telesc. Rack	233
	TECHNICAL DW		254 299
F			

NEW

FULGOR MILANO

DISTINTO

30" SPEED OVEN

A premium kitchen is not complete without a combi speed oven. Microwave, bake, broil, or use any of the combination cook modes to enjoy the benefits of speed cooking. Enjoy all the benefits of our combi speed steam oven without compromising the look of your Distinto built-in appliances.

0 0 0 10:22 ⊲ ⊛ ⊳ \$ \$ B FULGOR



OVEN 700 SERIES 30"

30" COMBI SPEED OVEN





NEW

CODE ID

F7DSPD30S1

4

OVEN 700 SERIES 24"

24" COMBI SPEED OVEN



SPECIFICATIONS			page
OVEN	PERFORMANCE		
3 in 1 Oven:	10 Combined Functions	TECHNICAL DWG	256
Microwave, Convection, and Combi	Automatic Cooking	TECHNICAL DATA	300
Stainless Interior with broiler	Pre-selected and customizable recipes		
Quick Access Menu	(weight, temperature, cooking time)		
Dual Keyboard	Microwave mode (6 levels)		
Automatic Programs	Fan assisted mode		
240 Volt Connection	Combined Cooking mode		
	Microwave and Grill mode		
	Defrosting by time and weight		

SPECIFICATIONS

OVEN

3 in 1 Oven: Microwave, Convection, and Combi Stainless Interior with broiler Quick Access Menu Single Keyboard Automatic Programs 240 Volt Connection

PERFORMANCE

10 Combined Functions Automatic Cooking Pre-selected and customizable (weight, temperature, cooking time) Microwave mode (6 levels) Fan assisted mode Combined Cooking mode Microwave and Grill mode Defrosting by time and weight



4

CODE ID

F7DSPD24S1



Microwave Cooking

Thawing

True Convection



Cool Touch Door

Automatic Cooking

Multi-level cooking

<u>u</u>	
≤	
¥.	
õ	
<u>S</u>	
0	

		page
	TECHNICAL DWG	256
	TECHNICAL DATA	300
e recipes		



Have you considered the benefits of cooking with steam?

Steam, bake, broil, or use one of the combination cooking modes and achieve beautiful and healthy results. Enjoy all the benefits of our combi steam oven without compromising the look of your Distinto built-in appliances.

OVEN 700 SERIES 30"

30" COMBI STEAM OVEN



SPECIFICATIONS

FEATURES

3 in 1 Oven:

Steam, Convection, and Combi-steam Stainless Interior with broiler Quick Access Menu Automatic Programs Meat Probe 240 Volt Connection Steam Generator

PERFORMANCE

12 Functions Automatic Cooking Pre-selected and customizable recipes (weight, temperature, cooking time) Steam System Combined Cooking Functions Steam Recovery Cycle CLEAN, assisted cleaning cycle for oven interior and steam circuit



4

CODE ID

F7DSC030S1



Steam Cooking

Steam Limescale Filter

True Convection

Automatic Cooking



ć Meat Probe



Multi-level cooking

TECHNICAL DWG TECHNICAL DATA 256 301

page



DISTINTO

24" **COMPACT COLUMN**

Limited on space but not interested in compromising your cooking experience? The Distinto Compact Column can be created by combining three exclusive cooking units in a single compact wall oven cabinet.



COMBI STEAM OVEN

Our new Fulgor Milano 1.3 cu ft builtin Combi Steam oven gives you a healthy alternative for cooking your favorite foods. This oven can also be used as a steam cooker, a full function oven or a combination of steam and convection heat are used together to provide perfect results.

CONVECTION OVEN

The new 24" Distinto Full Function convection oven is bigger than you think and features our easy to use and intuitive touch controls and is a perfect compliment to the other 24" Distinto built-in cooking products.

WARMING DRAWER

The Distinto compact warming drawer is a perfect complement to any kitchen and integrates seamlessly.

OVEN 700 SERIES 24"

24" COMBI STEAM OVEN



SPECIFICATIONS

OVEN

12 functions

Automatic cooking with pre-selected recipes which can be customizable (weight, temperature, cooking time) Steam system Combined cooking functions Steam recovery cycle CLEAN, assisted cleaning cycle for oven interior and steam circuit

SAFETY

Safety door - Door contact switch Control panel safety function Tangential cooling fan

FEATURES

Control panel with touch control Magnetic water filter Stainless steel interior Internal lighting Internal capacity 1.2 cu.ft Steam Generator

INCLUDED ACCESSORIES


Meat probe 1 stainless steel tray 1 flat rack Water tank Power cord with plug



4

CODE ID

F7SC024S1

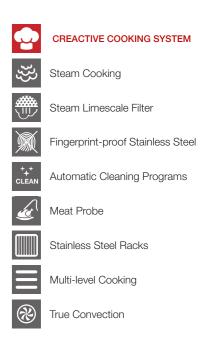

		page
ue le	TECHNICAL DWG	256
rols	TECHNICAL DATA	301

1 micro-perforated pan with stainless steel cover

OVEN 700 SERIES 24"

24" MULTIFUNCTION SELF-CLEANING OVEN





NEW

CODE ID

F7SP24S1

4

WARMING DRAWER 24"

24" WARMING DRAWER



SPECIFICATIONS		OPTIONAL	ACCESSORIES	page
OVEN	FEATURES	FMTELG	24" Telesc. Guides	233
15 cooking modes	Control panel with touch controls			
Automatic cooking with preselected and cus-	Dual convection fan	TECHNICA	LDWG	25
tomizable recipes (weight, temperature,	Black Porcelain enameled interior	TECHNICA	L DATA	30
cooking time)	Internal lighting			
Sabbath Mode	Internal capacity 2.6 cu.ft.			
BOOST to rapidly reach the pre-selected				
temperature	INCLUDED ACCESSORIES			
PYROLYSIS Self-cleaning	1 wide enameled tray with anti-splash insert			
CAFETY .	2 flat grill racks			
SAFETY	Dowor apple			

Power cable

SPECIFICATIONS

WARMING DRAWER	DRAWER 24" FU
Knob Control	Pre-heat dishes
Full extendable telescopic rails	Pre-heat coffee cu
Capacity 0,5 cu. ft.	Keep warm ready
Fan Assisted Heating System	Defrosting
All stainless steel structure	Leavening dough
Warming Temperature range; min. 86 °F up to 190 °F	Slow cooking min.
Push-Pull system to open and close door	
Non-slip rubber mat	
Internal Lighting	

Smoke catalyst

Cool door with 4-pane glass 2-speed tangential cooling ventilation Keypad and door safety lock function



4

CODE ID

F4DWD24S1



Sliding Telescopic Rails

Keep Warm Function



Slow Cooking

Leavening

Thawing

		page
onoriono	TECHNICAL DWG	257
cups	TECHNICAL DATA	303
dy food		

dough ng min. 86 °F up to 190 °F





COOKING



DISTINTO 400

SERIES

A sleek European design and flush installation, the 400 series oven shares the same body and soul of the 700 series oven, offering many of the same professional features while providing tremendous value. Available only in a single oven configuration, this series offers an oversized oven capacity, multi pass broil, European convection, concealed bake elements and 8 baking functions; all of which are controlled by an easy to use and extremely reliable control system.

The Athena XS control gives the home chef complete control via easy to use and intuitive controls making this oven a great choice as a primary or secondary oven for a variety of kitchen designs and applications.



OVEN 400 SERIES 30"

OVEN 400 SERIES 30"



SPECIFICATIONS

OVEN

Knob and electronic controls Single fan true convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks Enameled Broiler Pan

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Dehydrate Electronic cooking programmer Self-Clean Sabbath Mode

4

F4SP30S3

*	True
•••	Self
	Multi
*	Cool
K X	Inter

e Convection

f Clean Oven

ti-level cooking

I Touch Door

rior Lighting

00:00

Digital Controls

G	
z	
Y	
ō	
0	
υ	

OPTIONAL ACCESSORIES page		page
FMTR630	30" Telesc. Rack	233
TECHNICAL DWG TECHNICAL DATA		254 304

30" WARMING DRAWER STAINLESS STEEL DOOR





4

CODE ID

F7DWD30S1

DRAWER 700 SERIES 30"

30" WARMING DRAWER OVERLAY PANEL







SPECIFICATIONS WARMING DRAWER **DRAWER 30" FUNCTIONS** Knob Control Pre-heat dishes Heavy Duty full extendable telescopic rails Pre-heat coffee cups Large capacity 2,1 cu. ft. Keep warm ready food Convection heating system for a more heating distribution Defrosting

All stainless steel structure Warming Temperature range; min. 86 °F up to 190 °F Push-Pull system to open and close door 2 Internal lights Non-slip rubber mat

Leavening dough Slow cooking min. 86 °F up to 190 °F

TECHNICAL DWG	254
TECHNICAL DATA	305

page

SPECIFICATIONS

WARMING DRAWER

Knob Control

Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough

Installation with Overlay Panel Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft. Convection heating system for a more heating distribution All stainless steel structure Warming Temperature range; min. 86 °F up to 190 °F Push-Pull system to open and close door 2 Internal lights Non-slip rubber mat

4

F7IWD3001



Sliding Telescopic Rails

Keep Warm Function



Leavening



Slow Cooking



Thawing



Push Opening

DRAWER 30" FUNCTIONS

Slow cooking min. 86 °F up to 190 °F

TECHNICAL DWG TECHNICAL DATA page

255 305



matic door-latch system. for your convenience.

COOKING



DISTINTO OVEN 100

SERIES

A standard-setting series with first-class performance. Many preset cooking functions help you prepare your meals with efficiency and ease. The fastest and most versatile self-clean mode available, featuring an auto-

Child safety locks and cool-touch doors protect you and your family from high temperatures while cooking and during the self-clean cycle. Compact oven cavity dimensions fit in any kitchen and reduce energy consumption while providing ample space for all your cooking needs. A selection of accessories is available

OVEN 100 SERIES 30"

30" MULTIFUNCTION SELF-CLEAN OVEN





F1SP30S3



OPTIONAL ACCESSORIES

page

255

306

Telescopic rack 233

SPECIFICATIONS

OVEN	OVEN FUNCTIONS	FMTR 130 To
Knob and electronic controls	Bake	
True Convection	Broil	TECHNICAL DWG
Self-cleaning oven with Multifunction baking	Roast	TECHNICAL DATA
Black Porcelain enamel interior	Convection	
2 Halogen lights	True Convection	
Gross capacity 3.0 cu. ft.	Dehydrate	
2 chrome racks	Electronic cooking programmer	
Enameled Broiler Pan (basin + anti splash)	Self-Clean	
	Sabbath Mode	



OVEN 100 SERIES 30"

30" MULTIFUNCTION EASY-CLEAN OVEN



4 CODE ID

F1SM30S3



OVEN 100 SERIES 24"

24" MULTIFUNCTION EASY-CLEAN OVEN



SPECIFICATIONS		OPTIONAL ACCESSORIES		page
OVEN	OVEN FUNCTIONS	FMTR 130	Telescopic rack	233
Knob and electronic controls	Convection Bake			
Black Porcelain enamel interior	Convection Broil	TECHNICAL D	WG	255
2 Halogen lights	Convection Roast	TECHNICAL D	ATA	307
Gross capacity 3.0 cu. ft.	Bake			
2 chrome racks	Broil			
Enameled Grill basin	Lower Conv. Bake			

SPECIFICATIONS

OVEN

Knob and electronic controls True Convection Black Porcelain enamel interior 1 Halogen light Gross capacity 2.6 cu. ft. 2 chrome racks Enameled Broiler Pan

OVEN FUNCTIONS

Convection Bake Convection Broil Convection Roast Bake Broil Lower Conv. Bake

F1SM24S2



Convection

Multi-level cooking

Cool Touch Door

같 기

Interior Lighting

OPTIONAL ACCESSORIES		page
FMTELG	Telescopic guides	233
TECHNICAL DWG TECHNICAL DATA		255 307

DISTINTO MICROWAVE OVEN 24"

24" DRAWER MICROWAVE



FULGOR MILANO

DISTINTO **MICROWAVES**

The Fulgor Milano microwaves, with their stainless steel aesthetics, are the perfect choice for a modern style kitchen and they spouse perfectly with our other appliances. Every aspect of these products is designed to reflect the elegance and uniqueness of the Italian style.



24" DRAWER

This built-in drawer microwave has an Complete your Fulgor Milano elegant surface and hidden controls. The 1.2 cu. ft. drawer is tall enough for an average 20 oz mug cup and up to a microwave and 30" trim kit. The 4 qt. casserole dish. The drawer may be installed in an island or below a wall oven in a flush install without impacting the built-in venting.



appliance package with our cost

effective and versatile built-in

2 cubic-feet capacity microwave

features 10 power levels, multiple

cooking modes, timer and sensors

for reheating and defrosting.

24" COUNTER-TOP



30" OVER THE RANGE

Our 30", 1.8 cubic-feet capacity over the range microwave features a contemporary "no handle" design which allows this unit to be used in combination with either our Distinto line or Professional styled products. Three-speed ventilation provides up to 450 CFM of extraction.

SPECIFICATIONS

FEATURES

Flexible installation Stainless steel design Incandescent interior light Touch control Built-in airflow control for flush mounting transparent door glass Accessible height allows you to easily lift hot foods

168 FULGOR MILANO

4

F7DMW24S2

	Senso
\approx	Powe
6	Touch
\bigcirc	Prese
Ĕ	950 V
<u>**</u>	Auto [
\cap	Child

or Cooking

r Selection

n Controls

ts

Vatts

Defrost

d Safety Lock

page

TECHNICAL DWG TECHNICAL DATA 258 308

DISTINTO MICROWAVE OVEN 24"


24" COUNTER-TOP MICROWAVE



CODE ID

4

F4MWO24S1



1200
1 2 3 4 5 4 7 8 9 8 4 6 1 2 3 4 5 4 7 8 9 8 4 8 10 10 10 10 10 10 10 10 10 10 10 10 10 1

DISTINTO MICROWAVE OVEN 30"

30" OVER-THE-RANGE MICROWAVE

NOTE

F4TK30MWO Trim Kit - for a built-in installation, 30" trim kit may be purchased separately

SPECIFICATIONS		page	SPECIFICATIONS	
FEATURES			FEATURES	VENTILATION
Family Size	TECHNICAL DWG	258	10 Power Levels	Ventilation Fan Speed:
11 Power Levels	TECHNICAL DATA	309	White LED Display & Digital Clock	Turbo/High/Low/Off (Max
No Handle - Push Button Open			99-Minutes, 99-Second Digital Timer	Ventilation type available:
Electronic Touch Control			LED lighting	1 Charcoal Filter / 2 Air Fi
Super Defrost			Recessed Cavity Type	
Sensor Cook Menu			Child-Safe Lock-Out Feature	
Audible Signal Elimination			Display On/Off (controlled via Clock key)	
Auto Start			Removable Glass Turntable for complete,	
Child Lock			even cooking	
Extra Minute				
4 Program Stages				

F4OTR30S1

	Sensor Cooking
\approx	Power Selection
5	Touch Controls
\bigcirc	Presets
٣	1100 Watts
<u>**</u>	Auto Defrost
	Child Safety Lock

COOKING

	page
TECHNICAL DWG	258
TECHNICAL DATA	309

MICROWAVE FUNCTIONS

4 Sensor Cook Menu (Frozen Entrée, Frozen Vegetable, Reheat, Potato) 2 Programmed Cook (Beverage, Popcorn) 4 Soften/Melt Menu (Butter, Chocolate, Icecream, Cheese) 6 Convenience Features (Turntable On-Off, Clock, Keep Warm, Time Cook, Power Level, Defrost (Time/Weight)) Express Cook (1~6 minutes) Kitchen timer (plus Sound On/Off for 3-sec holding)

w/Off (Max. 450 CFM) available: Front/Top/Rear er / 2 Air Filters



DISTINTO **COFFEE MACHINE**

the waste tray.

172 FULGOR MILANO

COOKING





Our built-in coffee machine is your personal barista: from storing coffee beans to grinding fresh beans for brewing, to automatically storing puck-grounds into

Enjoy barista-style coffee, from espresso to cappuccino, and your favorite Americano at the touch of a button right at home. This easy to use made in Italy quality unit it the perfect complement to your Fulgor Milano Italian cooking products.



DISTINTO 30" - 24" **COFFEE MACHINE**



30" BUILT - IN COFFEE MACHINE

30" Distinto style Frame kit is available. This unique frame kit allows our unit to be installed in combination with our other 30" built-in Distinto products.



24" BUILT - IN COFFEE MACHINE

- Shown in the above image is our unique low profile Distinto trim kit.
- This accessory allows our built-in coffee machine to be installed over our other Distinto built-in products, for a seamless look.



24" BLACK GLASS

Our coffee machine is also available in a black glass finish. The 24" Distinto built-in coffee machine allows for a smaller footprint when installed on its own.

DISTINTO COFFEE MACHINE

30" BUILT-IN COFFEE MACHINE



NOTE

Both codes are required and sold separately. F7BC24B1 Coffee Machine F7DTK30BC Frame Kit

SPECIFICATIONS

FEATURES

Espresso / 2 x Espresso Coffee / 2 x Coffee White coffee Latte macchiato Milk froth Warm milk Programmable Temperature Water heating Time 3 minutes Automatic cleaning cycle Stand-by (energy saving)

FUNCTIONS

3 different coffee temperature settings 5 coffee strength settings: extra-strong, strong, medium, light, extra-light 5 mug size settings: espresso, corto, medium, large, pot Cappuccino Steam and Hot water Stand-by (energy saving)



CODE ID

4

F7BC24B1 F7DTK30BC



LED Lighting

Cappuccino Maker

 $\hat{\mathbf{C}}$ 1 ≈≈



Programmable Temperature

Whole Beans and Ground Coffee

Automatic Coffee Grinder



nago

	page
TECHNICAL DWG	259
TECHNICAL DATA	311

SAFETY

Water hardness setting Coffee and water refill indicators Ground coffee container to empty indicator Cleaning indicator Limescale filter indicator

INCLUDED ACCESSORIES

Cappuccino Maker Container for the milk Telescopic rails Power cord with plug

DISTINTO COFFEE MACHINE

24" BUILT-IN COFFEE MACHINE



4 CODE ID

NEW

F7BC24S1



DISTINTO COFFEE MACHINE

24" BUILT-IN COFFEE MACHINE BLACK GLASS



TECHNICAL DWG	259
TECHNICAL DATA	312

page

SPECIFICATIONS

FEATURES

Espresso / 2 x Espresso Coffee / 2 x Coffee White coffee Latte macchiato Milk froth Warm milk Programmable Temperature Water heating Time 3 minutes Automatic cleaning cycle Stand-by (energy saving)

FUNCTIONS

3 different coffee temperature settings 5 coffee strength settings: extra-strong, strong, medium, light, extra-light 5 mug size settings: espresso, corto, medium, large, pot Cappuccino Steam and Hot water Stand-by (energy saving)

SAFETY

Water hardness setting Coffee and water refill indicators Ground coffee container to empty indicator Cleaning indicator Limescale filter indicator

INCLUDED ACCESSORIES

Cappuccino Maker Container for the milk Telescopic rails Power cord with plug

SPECIFICATIONS

FEATURES

Espresso / 2 x Espresso Coffee / 2 x Coffee White coffee Latte macchiato Milk froth Warm milk Programmable Temperature Water heating Time 3 minutes Automatic cleaning cycle Stand-by (energy saving)

FUNCTIONS

3 different coffee temperature settings 5 coffee strength settings: extra-strong, strong, medium, light, extra-light 5 mug size settings: espresso, corto, medium, large, pot Cappuccino Steam and Hot water Stand-by (energy saving)



CODE ID

4

F7BC24B1



LED Lighting

Cappuccino Maker

1 ≈ Programmable Temperature



Ĥ

Whole Beans and Ground Coffee

Automatic Coffee Grinder

page TECHNICAL DWG 259 **TECHNICAL DATA**

313

SAFETY

Water hardness setting Coffee and water refill indicators Ground coffee container to empty indicator Cleaning indicator Limescale filter indicator

INCLUDED ACCESSORIES

Cappuccino Maker Container for the milk Telescopic rails Power cord with plug



MILANO

FULGOR


PROGAS COOKTOP

STRONG, POWERFUL, DISTINCTIVE

With sleek lines, a continuous surface grate over powerful aluminum burners, this cooktop combines elegant design, responsive performance, and thoughtful convenience. Distinto cooktop enters a new realm with its low profile allowing design flexibility for your kitchen. Enjoy the power of a 20,000 BTUs Dual Aluminum Burner of this cooktop while using the additional 4 Dual Stack Burners, designed to surpass all of your expectations. Continuous cast iron grates offer an even cooking surface for easy movement of pans from burner to burner so that even your biggest cooking events can be handled with ease.



36" DISTINTO GAS COOKTOP

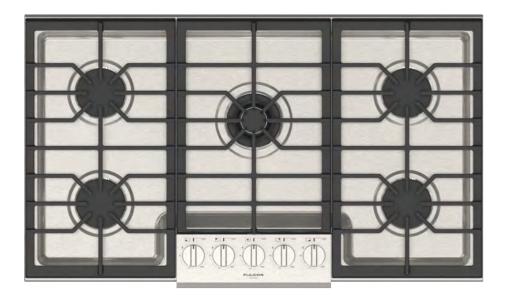



ð

CODE ID

F4PGK365S1

PRO COOKTOP 30"

30" DISTINTO GAS COOKTOP





SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Aluminum Dual Flame Burner with 20.000 BTU Max (NG) 2 Aluminum Stacked Burners with 15.000 BTU Max (NG) 1 Aluminum Rapid Burner with 12.000 BTU Max (NG) 1 Aluminum Burner with 8.000 BTU Max (NG) Heavy duty control panel Large cooking area Full pot stability Natural Gas (LP Convertible)



OPTIONAL ACCESSORIES		page
FMWOK FMSIM	Wok ring Simmer plate	232 232
TECHNICAL DWG TECHNICAL DATA		260 314

SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Aluminum Dual Flame Burner with 20.000 BTU Max (NG) 2 Aluminum Rapid Burners with 10.500 BTU Max (NG) 2 Aluminum Semi-rapid Burners with 8.000 BTU Max (NG) Heavy duty control panel Large cooking area Full pot stability Natural Gas (LP Convertible) ð

F4PGK305S1



(A) الم الم



- 1 Central Dual Burner
- Heavy Duty Grates



- Continuous Grate Surface
- Heavy Duty Control Panel





OPTIONAL ACCESSORIES

page

FMWOK	Wok ring	232
FMSIM	Simmer plate	232

NOTE:

Wok ring (FMWOK) to be used with centre burner only.

TECHNICAL DWG	260
TECHNICAL DATA	315

FULGOR MILANO

DISTINTO COCKTOPS 400 SERIES

The 400 series "Largo" cooktops utilize the most advanced technology available and combine this with a classic Italian design, resulting in a cooktop that not only performs magnificently but also looks spectacular. A design that lends itself to countless application possibilities, the 400 series cooktops also take cooking and maintenance needs into consideration. All grates are separated in sizes that make them easy to handle and remove for cleaning. The burners are well oriented for ease of use, with unique configurations like a wok burner and fifth burner on a 30" unit, making this cook top one of the most versatile in the category. Explore the Largo cooktop family and enjoy the possibilities; buon appetito!

COOKING



DISTINTO GAS COOKTOPS 400 SERIES





CONTINUOUS GRATE SURFACE

Move from one burner to the next with ease and safety.



DUAL BURNER

SPACE FOR WOK

Fulgor-Milano uses a dual-flame European-style sealed burner to deliver a wide range of heat. Our unique configurations allow you to have all the space needed for large pans or even a wok.

EUROPEAN SEALED BURNERS

Designed with only two removable parts, our sealed burners keep spills from leaking inside the cooktop. High quality aluminum.



44" GAS COOKTOP



ð

CODE ID

F4GK42S1

Heavy Duty Grates

Dual Burner

Stainless Steel



36" GAS COOKTOP



CIFICATIONS OPTIONAL ACCESSORIES		ACCESSORIES	page
GAS COOKTOP	FMWOK FMSIM	Wok ring Simmer plate	232 232
4 gas burners with 1 Dual Flame burner Electronic Ignition and Re-ignition	FMSPR	Small Pot Adapter	232
Flame-out Sensing Heavy duty cast iron grates	TECHNICAL	DWG	261
	TECHNICAL	DATA	316

SPECIFICATIONS

GAS COOKTOP

5 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing Heavy duty cast iron grates



F4GK36S1



Heavy Duty Grates



Dual Burner

Stainless Steel

page

FMWOKWok ring232FMSIMSimmer plate232FMSPRSmall Pot Adapter232TECHNICAL DWG261TECHNICAL DATA316

OPTIONAL ACCESSORIES

HNICAL DATA	316

COOKTOP 400 SERIES 30"

30" GAS COOKTOP



CODE ID

F4GK30S1



COOKTOP 400 SERIES 24"

24" GAS COOKTOP



SPECIFICATIONS	CATIONS OPTIONAL ACCESSORIES		page	
GAS COOKTOP	FMWOK	Wok Ring	232	
5 gas burners with 1 Dual Flame burner Electric Re-ignition system	FMSIM FMSPR	Simmer Plate Small Pot Adapter	232 232	
Flame-out Sensing Heavy duty cast iron grates	TECHNICAL		262 317	

SPECIFICATIONS

GAS COOKTOP

4 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing Heavy duty cast iron grates



CODE ID

F4GK24S1



Heavy Duty Grates

Continuous Grate Surface



Dual Burner


Stainless Steel


page

FMWOKWok Ring232FMSIMSimmer Plate232FMSPRSmall Pot Adapter232TECHNICAL DWG262

OPTIONAL ACCESSORIES

TECHNICAL DATA	317

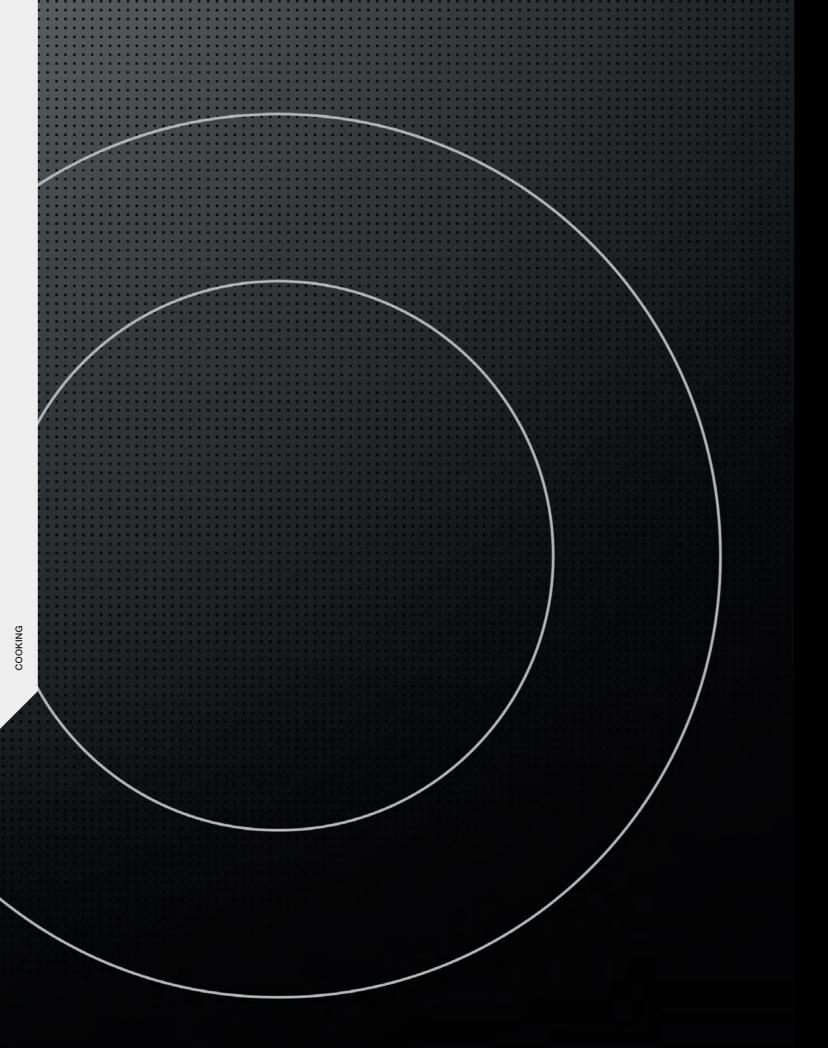

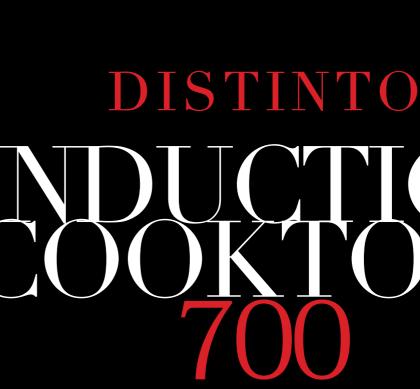

SERIES

Our 700 series induction cooktops follow the same design criteria of all our Fulgor-Milano products; style, function, and performance are at the heart of this product. Like our radiant touch cooktops, the induction units are finished with a subtle yet elegant aluminum trim that exudes luxury while offering all of the features you expect from a premium cooking appliance. Our induction cooktops offer the power and control of a gas cooktop with the cleanability of a radiant cooktop, giving you the best of both worlds. From tempering fine chocolate, braising a classic Ossobuco, or bringing a 15 quart stock pot to boil in minutes, the possibilities are endless with our induction technology.



DISTINTO **INDUCTION COOKTOPS** 700 SERIES





EXTRA LARGE ZONE AND BRIDGE ELEMENT

Maximum flexibility in how you use the cooktop.

SLIDE TOUCH CONTROLS

Each cooking zone has its own slide touch control for precise selection of power.

INDUCTION

The pan creating its own heat means cooking safely without compromise. Since there is no heat transfer from a conventional burner through the glass, induction cooking surfaces use the exact amount of energy needed - no more, no less!

FRAME

Aluminum frame stainless steel color: Sophisticated and functional! Adds a touch of elegance while protecting the glass edge.

COOKING

LOW TEMPERATURE FUNCTION

Low enough to temper chocolate or hold delicate sauces without using a double boiler.

INDUCTION COOKTOPS 700 SERIES 36"


36" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM

XXXX CODE ID

F7IT36S1

INDUCTION COOKTOPS 700 SERIES 30"

30" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM

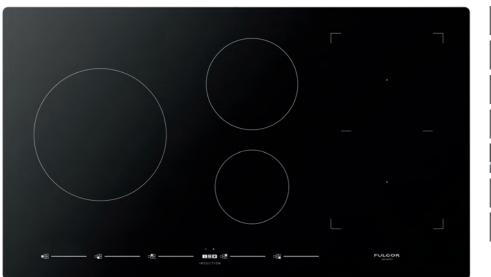





SPECIFICATIONS		OPTIONAL ACCESSORIES		page
INDUCTION COOKTOP		INDUKIT4	Pot Induction Adapter	234
5 Induction cooking zones	Pot Detection System			
11" large cooking zone	Child Lock Function	TECHNICAL	DWG	263
Bridge zone on the right side	Independent timer for each zone	TECHNICAL	DATA	318
Elegant Ceramic glass surface	Pause Function			
Premium induction technology	Booster function for each cooking zone			
for unsurpassed performance	Failure Codes Indication			
Melt and Simmering Functions	Digital Display for Power Level			
Residual heat and Power on Indicators Digital Minute Minder	Automatic Heat-up Time			

SPECIFICATIONS

INDUCTION COOKTOP

4 Induction cooking zones 11" cooking zone Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Melt and Simmering Functions Residual heat and Power on Indicators Digital Minute Minder

Pot Detection System Child Lock Function Independent timer for each zone. Pause Function Booster function for each cooking zone Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time

CODE ID

F7IT30S1



Easy Clean Ceramic Glass

Slide Touch Control

Pan Detection system

Residual Heat Sensor



Frame Creactive

Digital Minute Minder


G	
Ż	
š	
õ	
0	


 OPTIONAL ACCESSORIES		page
INDUKIT4	Pot Induction Adapter	234
TECHNICA TECHNICA		263 319



DISTINTO RADIANT COKTOPS 600 SERIES

Beautiful intuitive controls designed with elegance and precision. Radiant touch cooktops deliver quick and reliable performance with maximum flexibility. Touch controls with patented Peacock control sliding bar for power-level selection and fast boil with automatic power reduction.

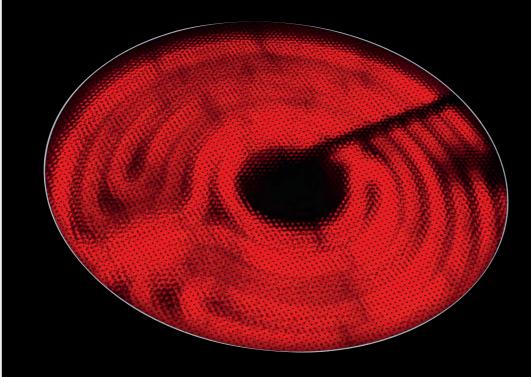

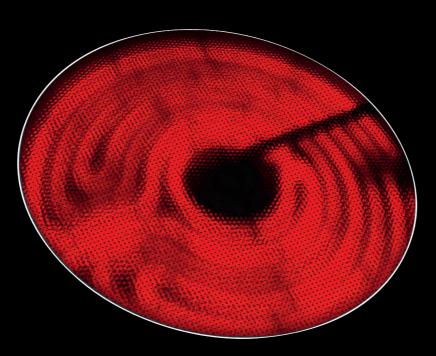

DISTINTO RADIANT COOKTOPS 600 SERIES





ELECTRONIC CONTROL

Fine-tuning of lower temperatures plus timer function is standard with our slide touch control bar and "Peacock" power display.

FRAME

Polished aluminum frame: Sophisticated and functional!

RADIANT COOKTOP 600 SERIES 36"

36" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM

F6RT36S2

RADIANT COOKTOP 600 SERIES 30"

30" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM





SPECIFICATIONS	page
RADIANT COOKTOP	TECHNICAL DWG 264
Digital Display for Power Level Low Power Scale for Delicate Cooking Control Display Lock Automatic Fast Boil Function Power and Hot surface Indication Timer Functions	TECHNICAL DATA 320
Timer Display Acoustic Buzzer Independent timer for each zone Booster function for each cooking zone Failure Codes Indication	

SPECIFICATIONS

RADIANT COOKTOP

Digital Display for Power Level Low Power Scale for Delicate Cooking Control Display Lock Automatic Fast Boil Function Power and Hot surface Indication Timer Functions Timer Display Acoustic Buzzer Independent timer for each zone. Booster function for each cooking zone Failure Codes Indication

4

CODE ID

F6RT30S2



Easy Clean Ceramic Glass

Peacock Touch Control



Double Radiant



Triple Radiant



Timer



Residual Heat Sensor

Frame Creactive

COOKING

page

TECHNICAL DWG

264 321

SERIES

Our 300 series cooktops offer the same elegant European design and family line as our radiant touch and induction cooktops but in a package that offers great value and performance to the consumer. The manual controls are reliable and accurate and continue to be the most user friendly of all control systems available today. Even the most discerning cooks will be impressed with the functionality and performance of this mainstay. Like all Fulgor-Milano cooktops the 300 series offers a shallow profile for countless installation options.

RADIANT COOKTOPS 300 SERIES 24"

24" RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM



SPECIFICATIONS

RADIANT COOKTOP

Power on Indication Hot surface Indication

202 FULGOR MILANO



CODE ID

F3RK24S2



Easy Clean Ceramic Glass



Double Radiant



Residual Heat Sensor Frame Creactive





page

TECHNICAL DWG	264
TECHNICAL DATA	322



DISTINTO REFRIGERATION & WINE

COLD TEMP. UNDER CONTROL.

The refrigeration system was developed to be optimized for complete integration and designed to offer maximum storage capacity. The dual-movement hinges ensure that all the fridge drawers extend fully when open. The interior is a brilliant white, for striking effect. Fulgor Milano Wine Cellars store wine under ideal conditions, designed to eliminate the four enemies of wine: heat, humidity, light, and vibration. With all of the functional and aesthetic features of our refrigerators, significant attention was paid to the added features of customized humidity and temperature control, ensuring the optimal environment for aging your wine collection.



DISTINTO **REFRIGERATION** WINE

DUOPRO

Dual variable speed compressors and two dedicated evaporators ensure smooth, quite, energy efficient operation.

SOFT-CLOSING SYSTEM

State-of-the-art mechanisms ensure the slow and silent closing of drawers and doors every time.





6









INTERIOR CONVENIENCE

Brilliant white aluminum interior walls combine with a powerful LED lighting system to create a striking effect and a bright interior. With a state of the art adjustable glass shelving system and door bins, convenience is key while the advanced refrigeration system keeps your food fresher longer.

OPTIVISION

The Optivision lighting system uses modern LED technology to ensure an optimal view of the interior. Ten LED arrays light the refrigerator compartment from above, while 7 individual spot lights illuminate distinct areas of the fridge and fresh food compartments and Flexzone drawer.

CUSTOM SIZED ICE

With the Ice Maker menu you can choose the size of the ice cubes produced automatically between large and medium.

WINE CELLAR

The electronic control enables the preferred humidity level to be chosen, between high, medium and low, ensuring the correct preservation of corks, a fundamental element for the storage of fine wine. Not just tasting temperature: the Cave storage compartment can also be used to store red wines to be aged over a long period thanks to the accurate temperature and humidity control.



BUILT-IN WINE CELLAR 24"

24" DISTINTO BUILT-IN WINE CELLAR



SPECIFICATIONS

WINE CELLAR

Overlay Panel Cave Storage Compartment, Natural Wood Shelves, for 36 bottles Wine Celler Compartment, Natural Wood Shelves, for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting Brilliant white aluminium interior Flexzone Bottom Drawer

CODE ID

F7IBW24O1-R (RIGHT HINGE)






OPTIONAL ACCESSORIES	page
REFHANDIS24 Distinto Wine Cellar Handle Kit	235
REFSBSINT60 Coupling kit	235
TECHNICAL DWG	267
TECHNICAL DATA	326
NOTE:	

Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer

BUILT-IN FRIDGE 36"

36" DISTINTO BUILT-IN FRIDGE

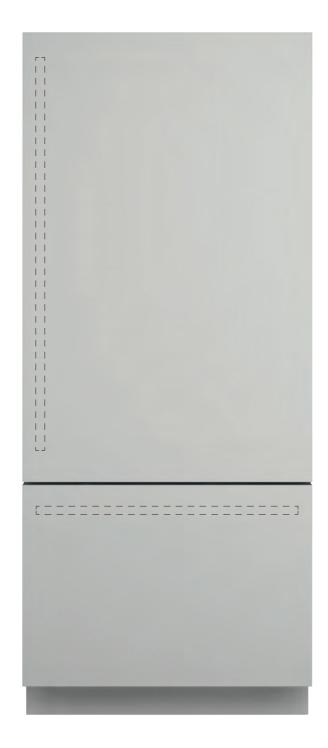

SPECIFICATIONS

FRIDGE

Overlay Panel Fridge Compartment Flexzone Bottom Drawer Total No Frost Stainless Steel Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior

CODE ID

F7IBM36O1-R (RIGHT HINGE)

CODE ID

F7IBM36O1-L (LEFT HINGE)



RIGHT HINGE


LEFT HINGE



Cool Zone 0°C



Deep-freezing





Total No Frost



Rapid Deep Freezing









LED lighting Noise Level 41 (dB) Integrated Installation Holiday Mode



OPTIONAL ACCESSORIES	page
REFHANDIS36 Distinto Fridge Handle Kit	235
REFSBSINT60 Coupling kit	235
TECHNICAL DWG TECHNICAL DATA	267 325

NOTE:

Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer

36" FRENCHDOOR REFRIGERATOR

The Fulgor Milano freestanding counter depth French-door unit opens wide to reveal features like an internal water dispenser, adjustable fresh zone drawer, tri-level slide-out freezer baskets and self-closing freezer drawer.



10.0

Once the Distinto Handle Kit is installed, our counter-depth french door fridge is a perfect complement to any of our Distinto ranges or Distinto built-in cooking appliances.



36" FRENCH DOOR FRIDGE

36" FRENCH DOOR FRIDGE SHOWN WITH DISTINTO HANDLE KIT



SPECIFICATIONS

FRIDGE

COUNTER-DEPTH STYLE

Limited on space and can't fit a

full height built-in fridge, or sim-

ply want to have the look without

blowing the budget? The new

Fulgor Milano counter-depth fri-

dge allows you to achieve a be-

autiful look without compromise.

Duo Cycling Cooling Ion Fresh Inner Digital Display Sabbath Mode Large Pantry Drawer Height Adjustable Cantilever Shelves Interior Filtered Water Dispenser Interior Theatre Lighting with LED lights

FREEZER FEATURES

Automatic Ice Machine Large Freezer Drawer

F6FBM36S2 F7HK36FFBS



Fingerprint-Proof Stainless Steel



ION Fresh



LED Lighting



Total No Frost



Holiday Mode

NOTE

F6FBM36S2 F7HK36FFBS French Door Fridge Distinto Handle Kit



REQUIRED ACCESSORIES	page
F7HK36FFBS Distinto French Door Fridge Handle Kit	235
TECHNICAL DWG	268
TECHNICAL DATA	327

DISTINTO VENTLATION 600-400 SERIES

As important as it is to have a cooking product give you the performance to create all of your cooking masterpieces, effective ventilation is essential to remove cooking odors and excessive heat from the kitchen. To compliment our line of cooking products we offer a complete range of ventilation products which are also hand crafted in Italy and meet all of the criteria one would expect. Quality, performance, fit and finish, are all embodied in our ventilation products. Let us help you find the best solution to meet your individual performance requirements and design needs.



VENTILATION

DISTINTO VENTILATION 600 - 400 SERIES



BAFFLE FILTER

Stainless steel and dishwasher safe, our baffle filters allow for perfect filtering of cooking vapors and grease while still offering efficient suction.

LED

For perfect illumination of your cooking surface.



PERFECT QUALITY

Smooth weld finished corner surface.

VENTILATION

34" INSERT HOOD





4

CODE ID

F6BP34S1

HOOD 400 SERIES 28"

28" INSERT HOOD



SPECIFICATIONS	OP1
INSERT HOOD	FMF
600 CFM	
69 dB sound rating	TEC
Pro Baffle Filters	TEC
LED Lighting	

OPTIONAL ACCESSORIES		page
FMFIL	Charcoal Filters	234
TECHNICAL DWG 265 TECHNICAL DATA 323		

SPECIFICATIONS

INSERT HOOD

600 CFM 69 dB sound rating Baffle Filters LED Lighting

F4BP28S1



CFM max 600





Noise Level 69 (dB)

Ceiling installation

OPTIONAL ACCESSORIES		page
FMFIL	Charcoal Filters	234
TECHNICAL DWG TECHNICAL DATA		265 323



36" UNDERCABINET HOOD



4

CODE ID

F4UC36S1

30" UNDERCABINET HOOD
FULCOR
distant

HOOD 400 SERIES 30"

ō	
E	
٩.	
Ξ	
ż	
ш	
~	

SPECIFICATIONS OPTIONAL ACCESSORIE		ESSORIES	page
INSERT HOOD	FMFIL	Charcoal Filters	234
450 CFM 69 dB sound rating Baffle Filters LED Lighting	TECHNICAL DV TECHNICAL DA		265 323

SPECIFICATIONS

INSERT HOOD

450 CFM 69 dB sound rating Baffle Filters LED Lighting

F4UC30S1



մե

CFM max 450

LED Lighting



- Noise Level 69 (dB)
- Ļ

Wall hung installation

OPTIONAL ACCESSORIES		page
FMFIL	Charcoal Filters	234
TECHNICAL DWG	ì	265
TECHNICAL DATA		323




DISTINTO CHIMNEY HOODS



Fulgor Milano has now added an elegant pyramid style chimney wall hood which features the same quality and finish you have come to expect. Like so many of our products this stylish vent hood will offer the power required to do the job and features elegant baffle style filters expected in a professional style product. Available in both 30" and 36" widths, both hoods come standard with 600 CFM performance but feature a power damping system to meet local code requirements for lower CFMs if needed.



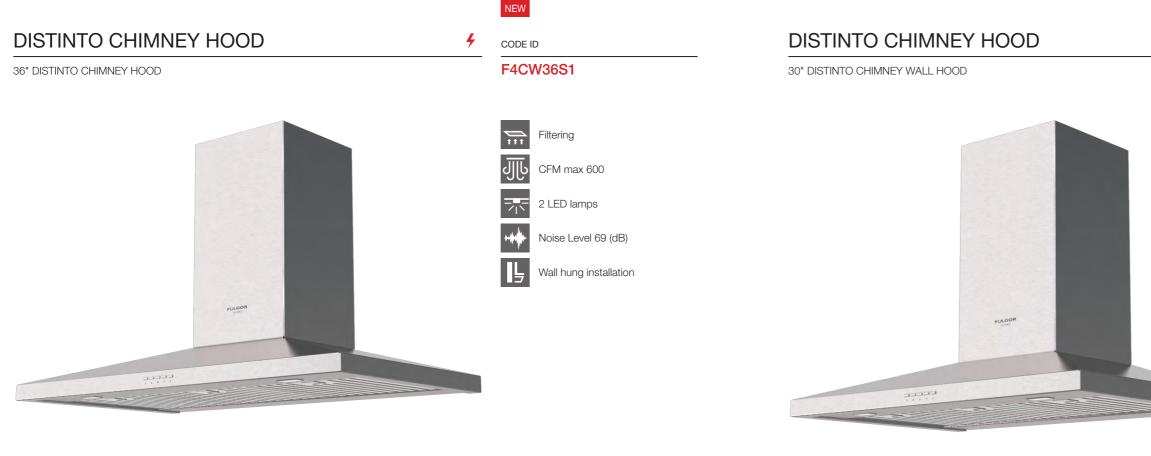

SPECIFICATIONS		ICATIONS OPTIONAL ACCESSORIES		page
CHIMNEY HOOD		FMFILCW	Carbon Filter	234
Scotch brite stainless steel				
Electronic controls		TECHNICAL DWG	ì	266
4 Speed Settings		TECHNICAL DAT	A	324
LED lighting				
Led 2x1,2 W - 3200 K				
Fan motor 600 CFM				
69 dB sound rating				
Baffle filter				
Minimum distance:				
- Electric hob 21" - 53 cm				
- Gas hob 24" - 61 cm				

SPECIFICATIONS

CHIMNEY HOOD

Scotch brite stainless steel Electronic controls 4 Speed Settings LED lighting Led 2x1,2 W - 3200 K Fan motor 600 CFM 69 dB sound rating Baffle filter Minimum distance: - Electric hob 21" - 53 cm - Gas hob 24" - 61 cm



CODE ID

4

F4CW30S1



Filtering

CFM max 600

2 LED lamps

++++

Wall hung installation

Noise Level 69 (dB)



OPTIONAL ACCESSORIES		page
FMFILCW	Carbon Filter	234
TECHNICAL DWG		266 324





DISHWASHERS

We love preparing meals for family and friends, but with that comes the clean up. To make life easier, Fulgor Milano offers two distinct styles of dishwashers maintaining the design integrity of your kitchen. Choose between Distinto, or Integrated which will accept a custom panel to match your cabinets. Our Italian built dishwashers offer all of the features that have become the standard in premium dishwashers models on the market today. Quiet performance, stainless interior, flow-through heater, adjustable upper racks and amazing washing results are just some of the features you can expect from our dishwashers.

DISHWASHERS

DETERGENT & WATER SOFTENING

You can use powder, liquid/gel or tablet detergents in the machine. Cleaning, rinsing and drying performance of your dishwasher will increase when water softening system is adjusted properly.



BASKET

The baskets have been redesigned to be more robust and flexible while providing easy loading for spotless dishes. Featuring three wash arms and a triple filtration system for precise cleaning.

WASH SYSTEM

The wash system automatically adjusts the water volume, pressure, and temperature according to load size, soil levels, and program setting.

ADJUSTABILITY

The height-adjustable upper rack easily accommodates a variety of glassware sizes and makes room for larger items below.

FUNCTIONS

Washing programs of your dishwasher are designed to obtain the best cleaning effect, considering the type of the soiling, soiling degree and properties of the dishes to be washed.



CUSTOMIZABLE

Offers flexibility while arranging dishes for wash. Thanks to this mechanism, you can use your basket in three different positions: namely lower, middle and upper positions.

24" DISHWASHER

24" STAINLESS STEEL BUILT-IN DISHWASHER SHOWN WITH DISTINTO HANDLE KIT



4 CODE ID

F6DWT24SS2 F7UHK24DISH



24" OVERLAY BUILT-IN DISHWASHER

24" OVERLAY DISHWASHER



NOTE

F6DWT24SS2 F7UHK24DISH

SPECIFICATIONS

DISHWASHER

Dishwasher Distinto Handle Kit



16 Place Settings 6 Programs 45 dB Silent Operations Flexible Rack Loading All-In-One single tablet Detergent Function Fast Function 5 Level Wash Flow-Through Heater 3 way Euro Filtering System Front Adjustable rear feet Adjustable Hinge System Built-in High Loop with Air Gap Double Motion Float System

REQUIRED ACCESSORIES	page
F7UHK24DISH Distinto Dishwasher Handle Kit	234

TECHNICAL DWG	
TECHNICAL DATA	

269

328

SPECIFICATIONS

FEATURES

16 Place Settings 6 Programs 45 dB Silent Operations Flexible Rack Loading All-In-One single tablet Detergent Function Fast Function 5 Level Wash Flow-Through Heater 3 way Euro Filtering System Front Adjustable rear feet Adjustable Hinge System Built-in High Loop with Air Gap Double Motion Float System

CODE ID

F6DWT24FI2



Noise Level 45 (dB)

 \square Steel Tub TITT



Fast Wash Cycle

1/2 Load Cycle

Flexible Rack Loading

page

TECHNICAL DWG TECHNICAL DATA

269 329



DISTINTO OPTIONAL ACCESSIORIES





Small pot reduction

CODE FMWOK

DISTINTO OVEN





For best results with a wok, use this accessory with the high-BTU

burner specifically creactiveed for wok cooking.

Wok ring

Uniquely creactiveed accessory allows you to use pans smaller than 4 inches on a stable, flat cooking surface

30" Telescopic Oven Rack

CODE FMTR630



Simmer plate

CODE FMSIM

CODE FMSPR


The cast-iron simmer plate provides a steady simmer temperature, evenly distributed across a stable heating surface.



24" Telescopic guides

CODE FMTELG

232 FULGOR MILANO

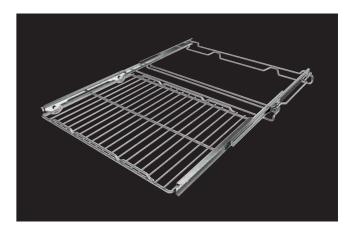


30" Telescopic Oven Rack

CODE FMTR130

DISTINTO HOOD

OPTIONAL ACCESSORIES

DISTINTO REFRIGERATION / WINE COOLER

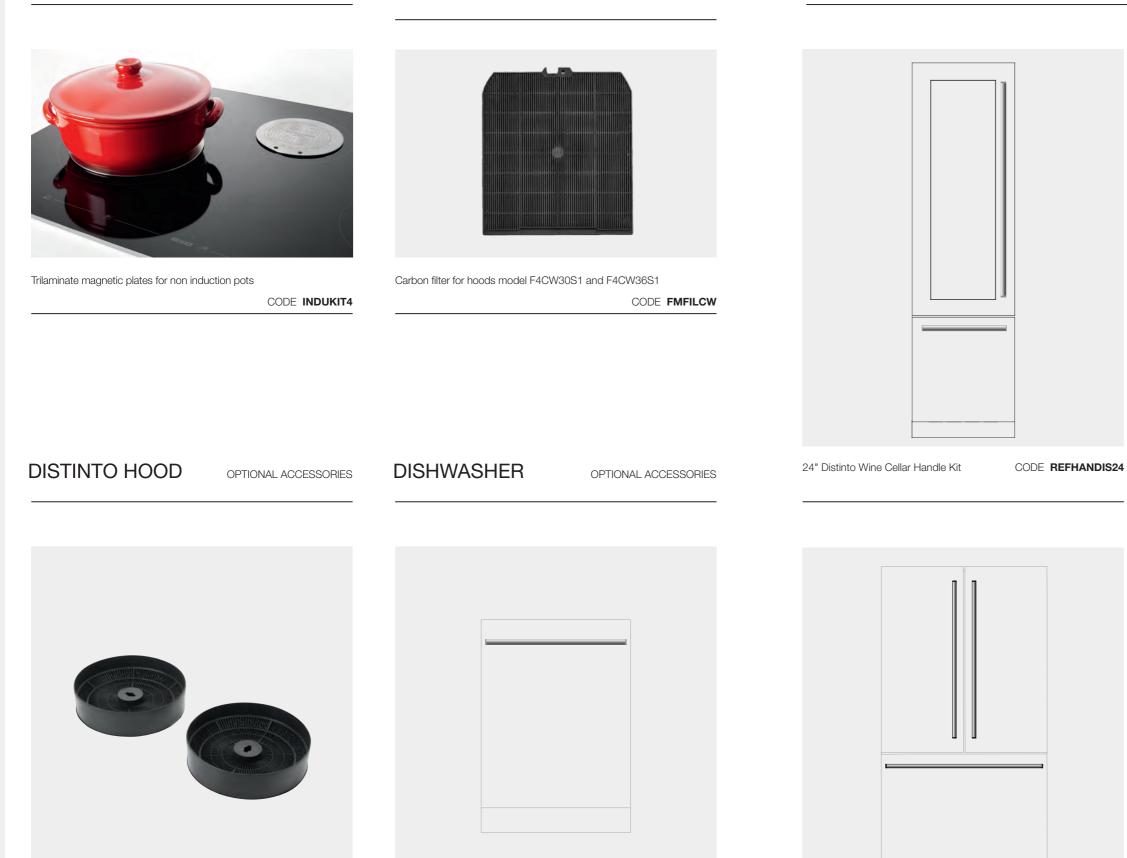

Charcoal filters (for recirculating installations)

CODE FMFIL

Distinto Dishwasher Handle Kit

CODE F7UHK24DISH

Distinto French Door Fridge Handle Kit


CODE F7HK36FFBS



36" Distinto Fridge Handle Kit

CODE REFHANDIS36

36" Built-In Fridge and 24" Built-In Wine Cellar Installation Kit. Handle kit is to be supplied by the installer. CODE **REFSBSINT60**

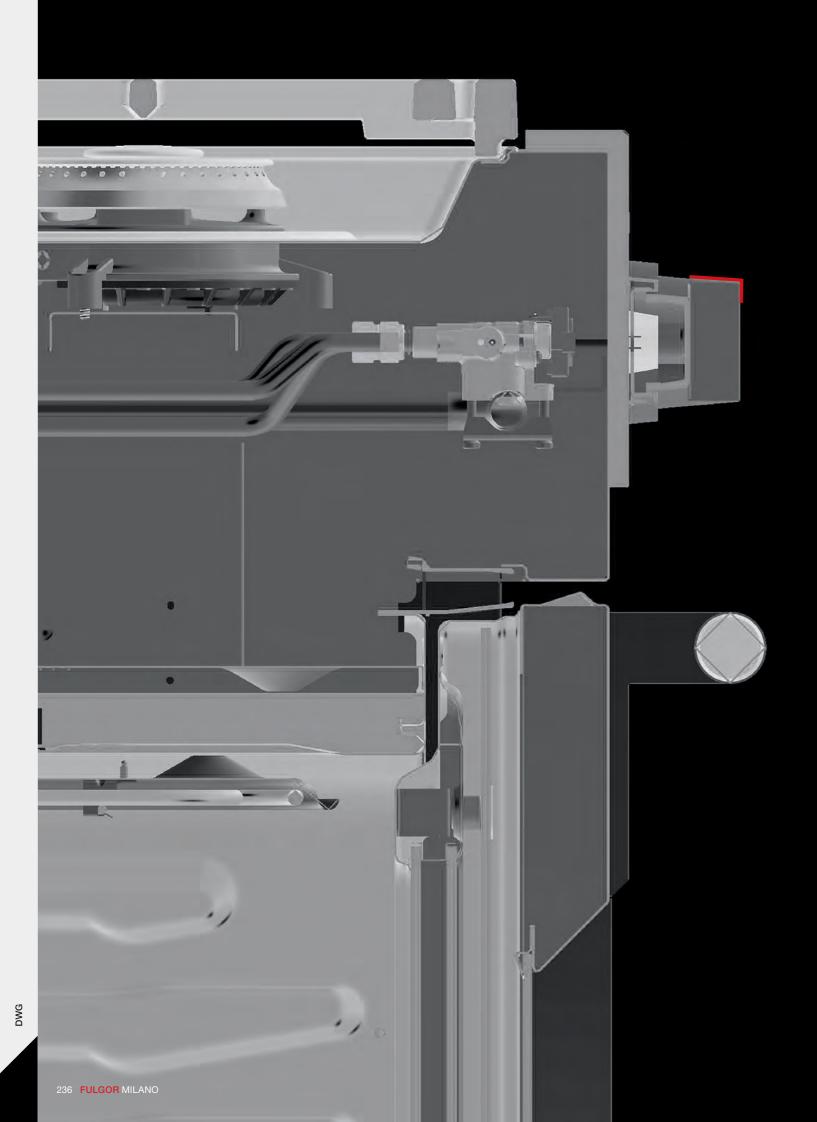

PROFESSIONAL





TECHNICAL DWG


SOFIA PROFESSIONAL RANGE


TECHNICAL DIMENSION

SOFIA / ACCENTO PROFESSIONAL RANGE

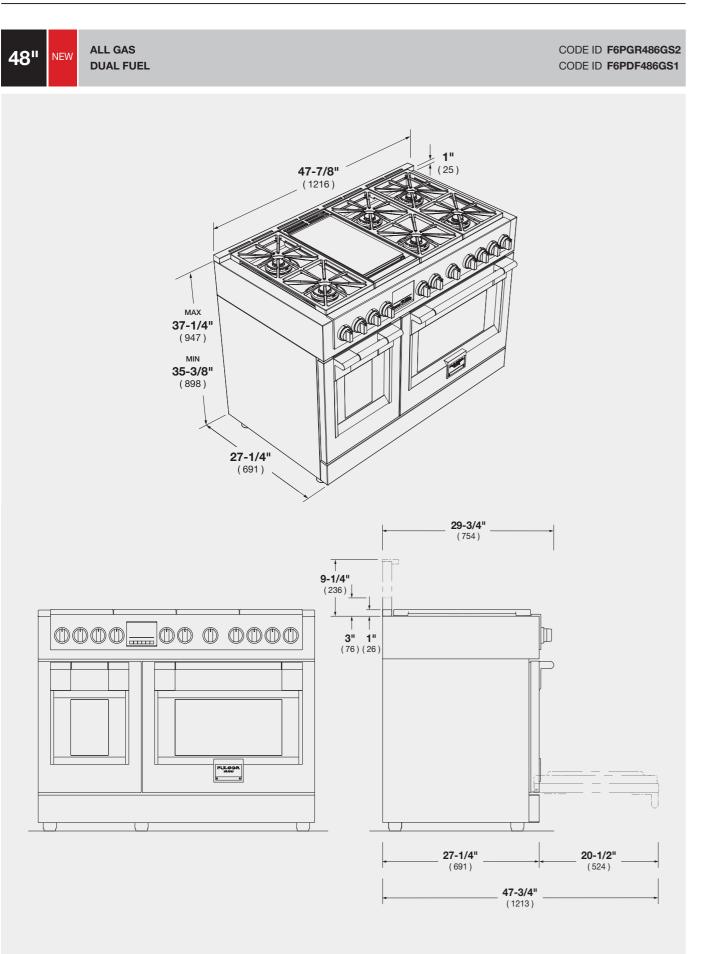

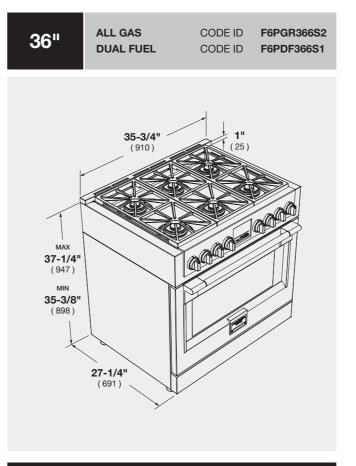

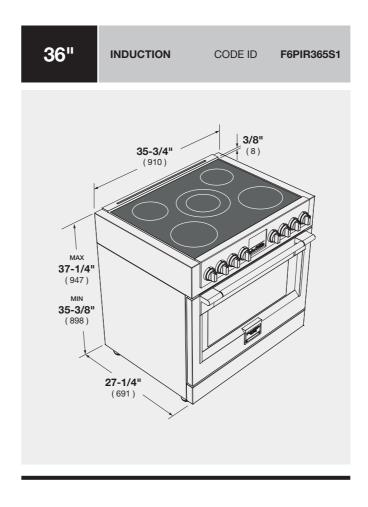

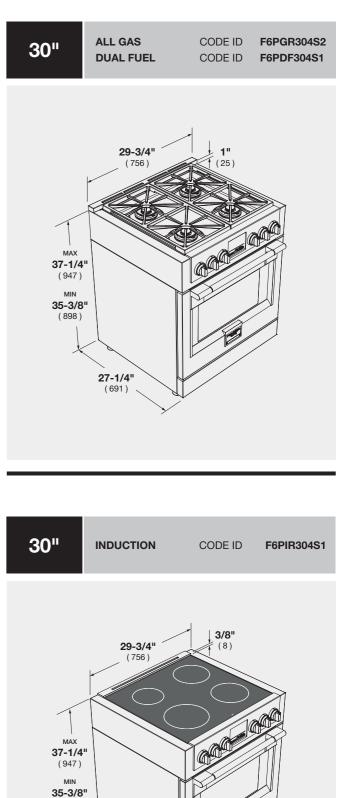

(898)

27-1/4"

(691)

ACCENTO RANGE

TECHNICAL DIMENSION



(1216)


27-1/4" (691)


1"

(25)

F

CC*

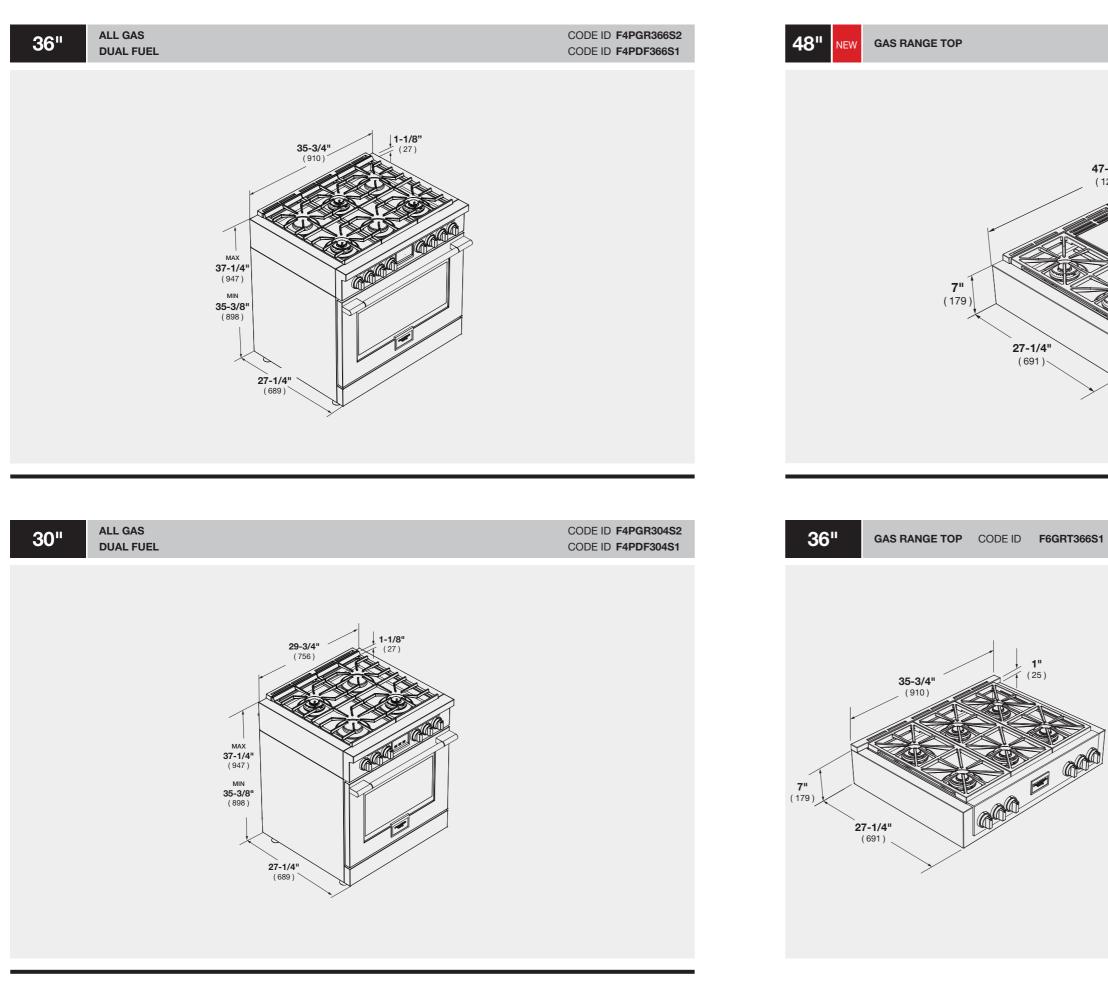


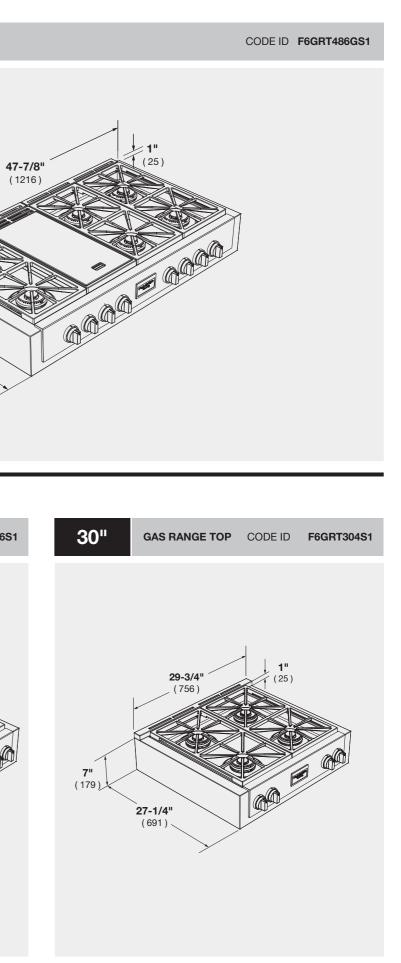



SOFIA PROFESSIONAL RANGE TOP


TECHNICAL DIMENSION

SOFIA PROFESSIONAL GAS COOKTOP

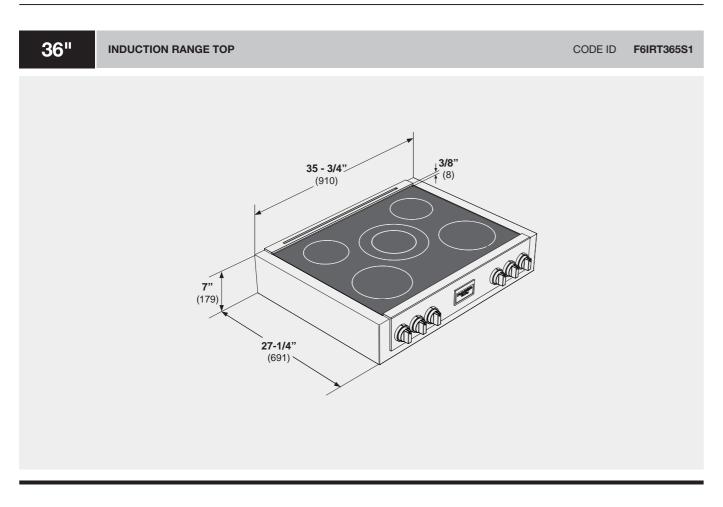

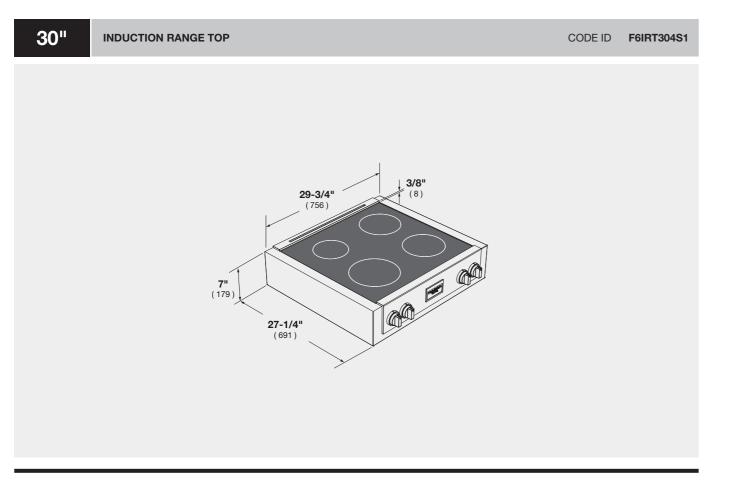

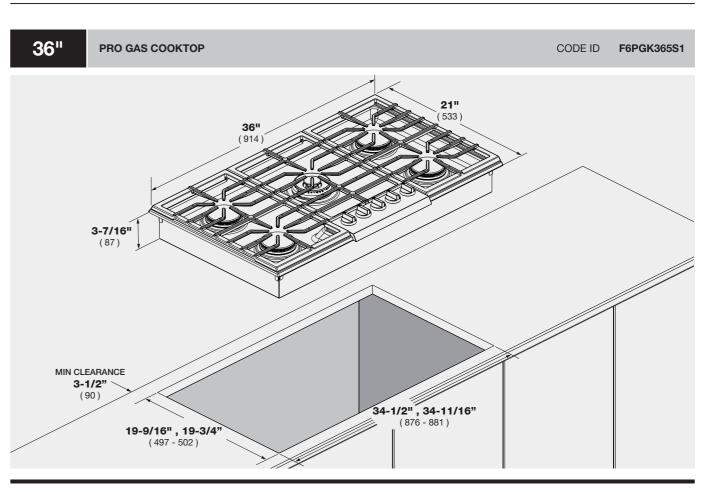

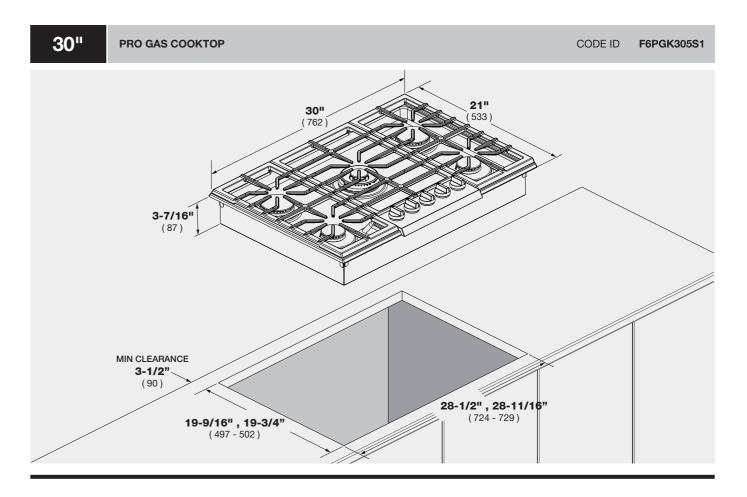

TECHNICAL DWG


)


SOFIA PROFESSIONAL OVEN / WARMING DRAWER


TECHNICAL DIMENSION


CODE ID F6PWD30S1

SOFIA PROFESSIONAL OVEN

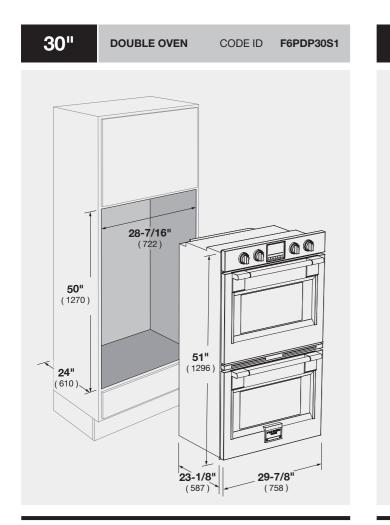

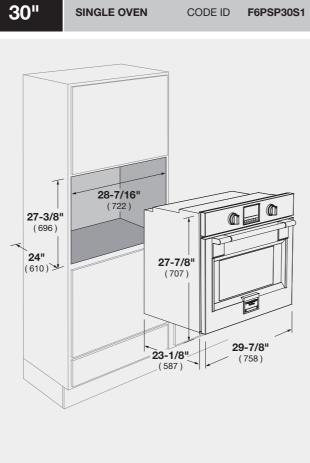


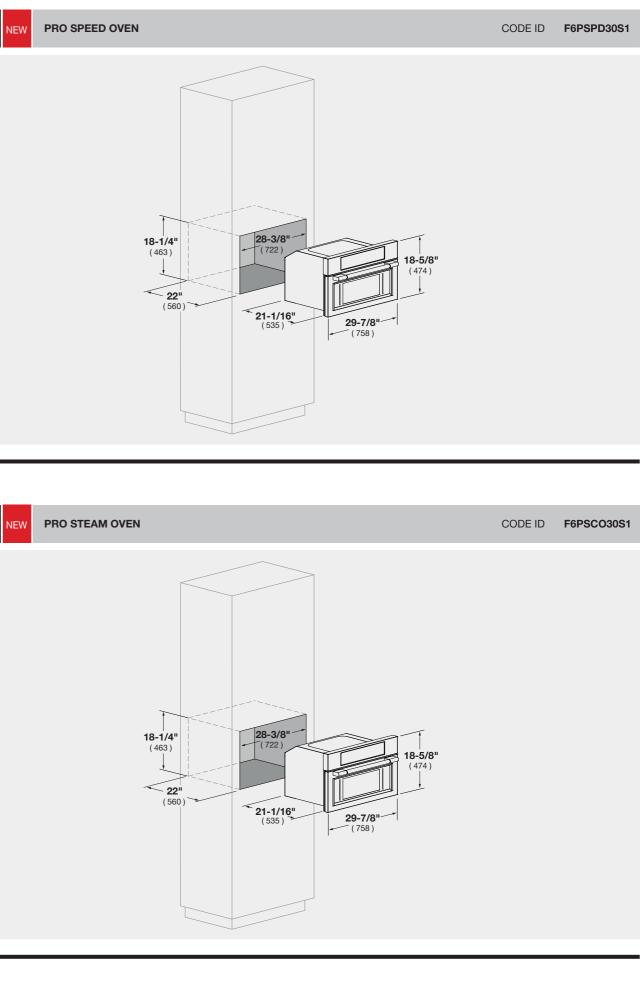

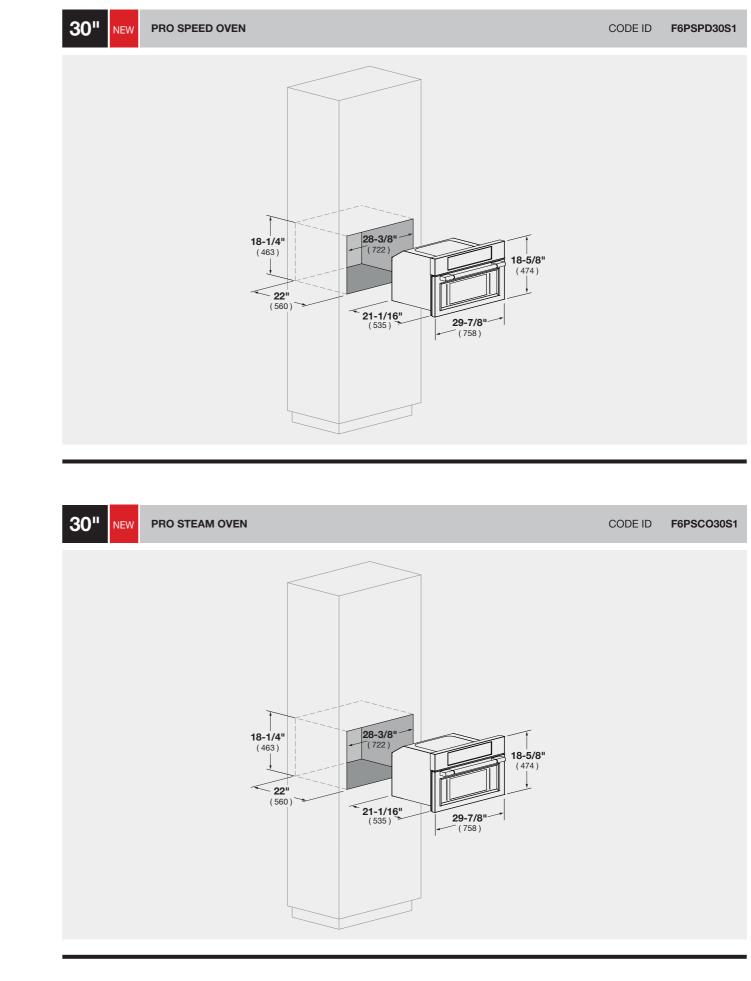

30"

WARMING DRAWER

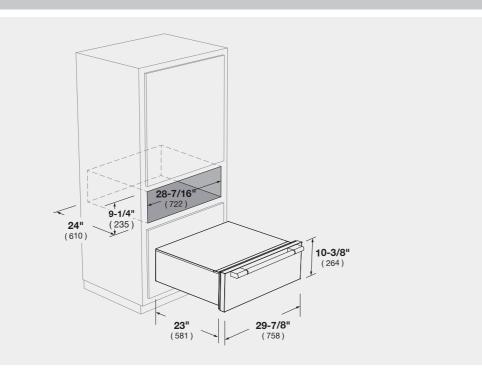


DWG TECHNICAL

SOFIA PROFESSIONAL COFFEE MACHINE / HOOD

TECHNICAL DIMENSION

SOFIA PROFESSIONAL VENTILATION

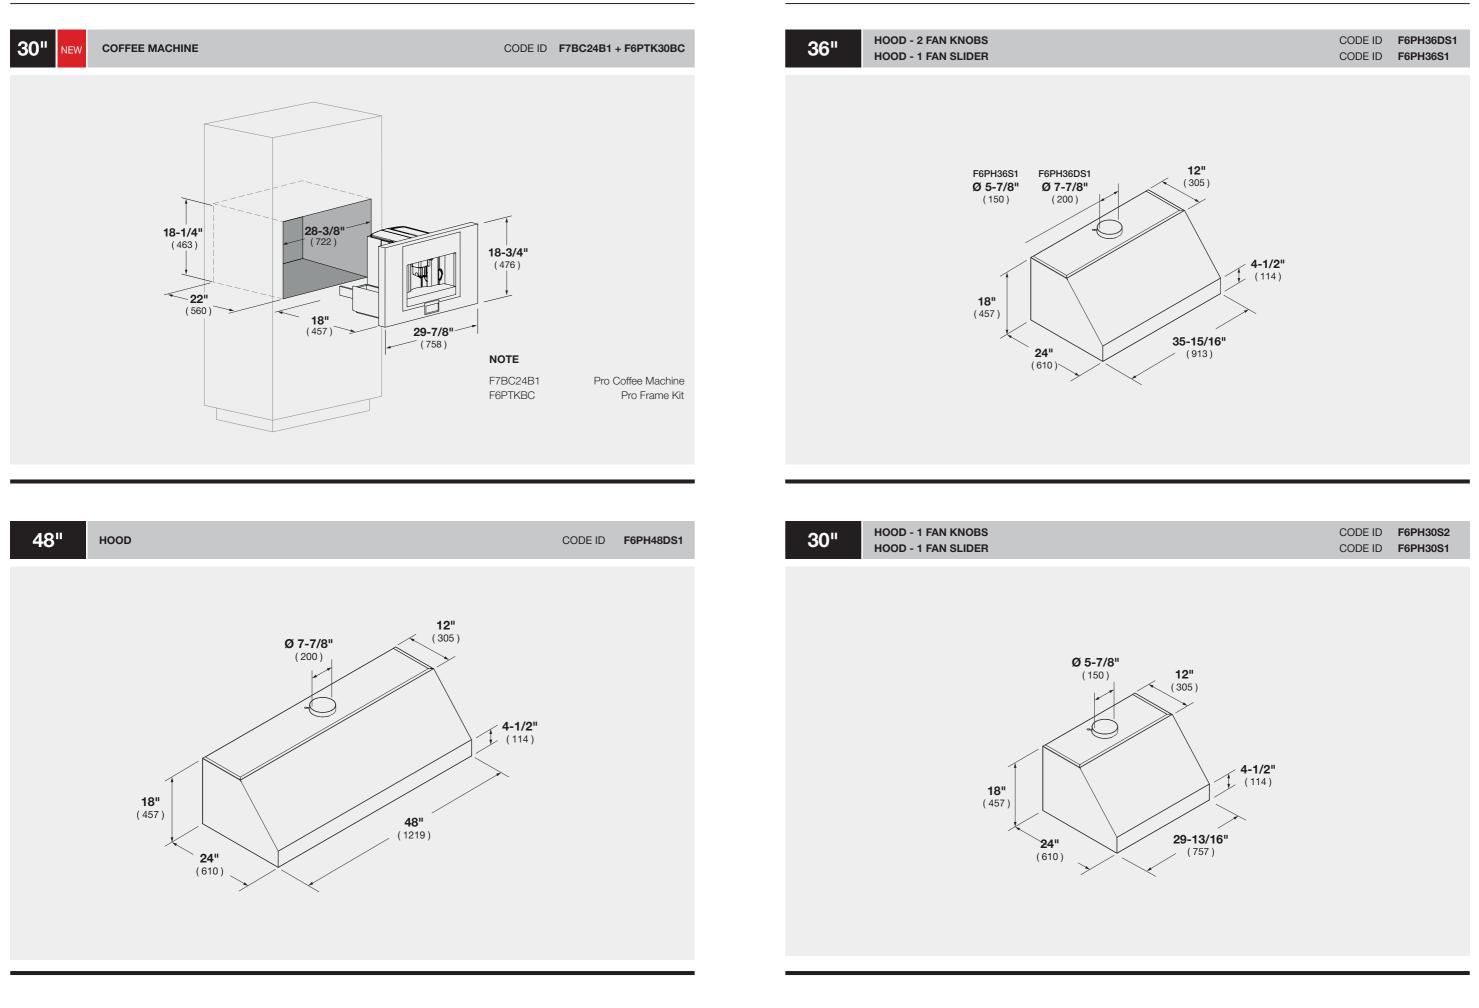


TECHNICAL DWG





SOFIA PROFESSIONAL CHIMNEY HOOD


TECHNICAL DIMENSION

SOFIA PROFESSIONAL VENTILATION

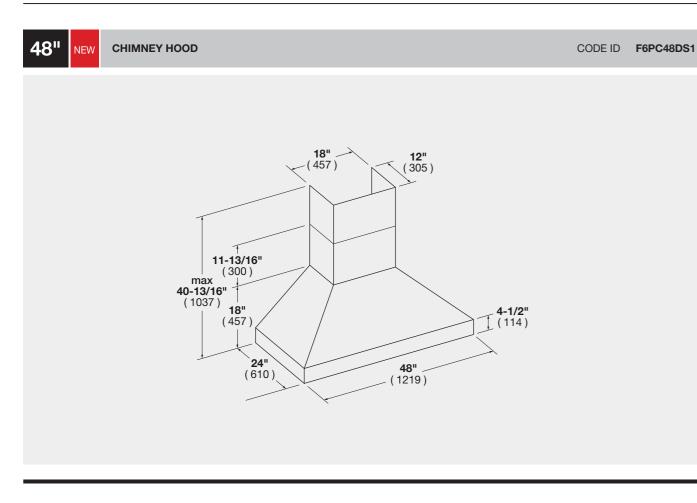

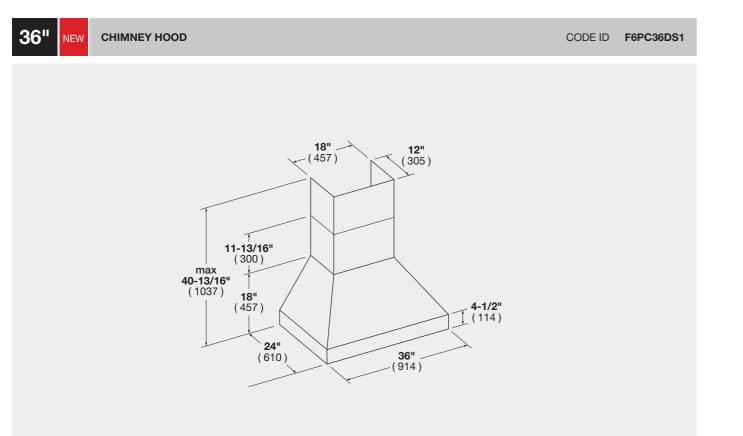

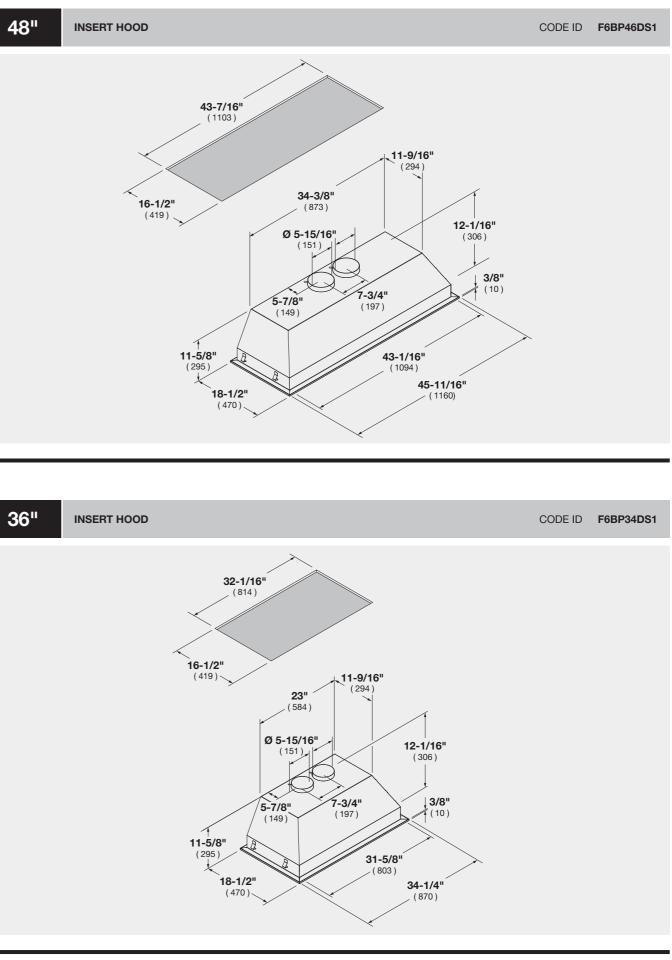

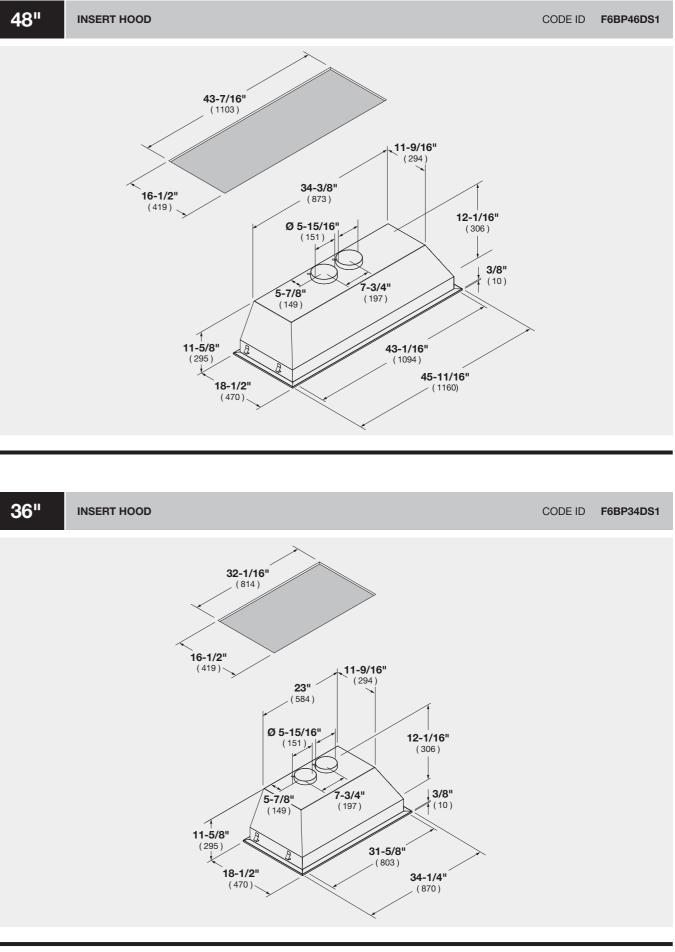



DWG TECHNICAL


PROFESSIONAL REFRIGERATION

TECHNICAL DIMENSION

PROFESSIONAL REFRIGERATION

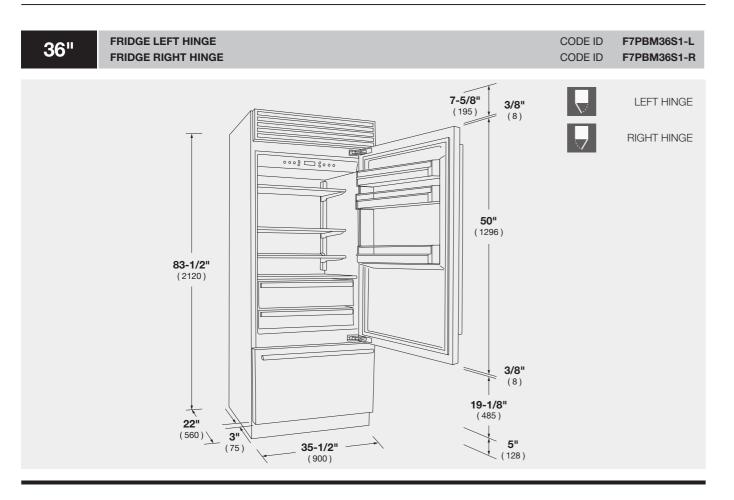

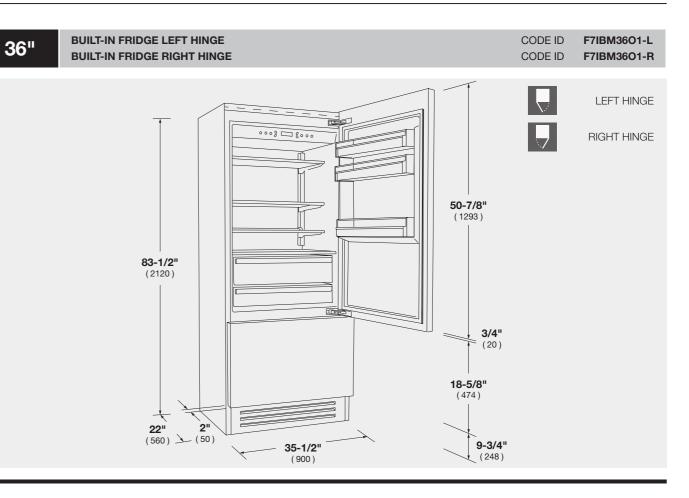

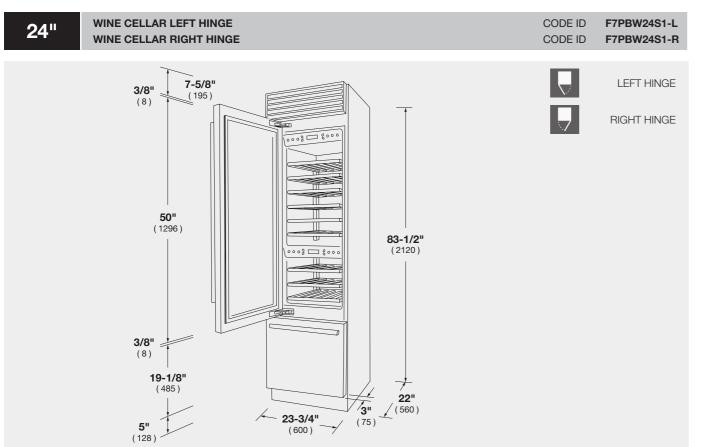

24" **BUILT-IN WINE CELLAR RIGHT HINGE** 50-7/8" (1293) 3/4" (20)


18-5/8"

9-3/4" (248)

(474)

BUILT-IN WINE CELLAR LEFT HINGE



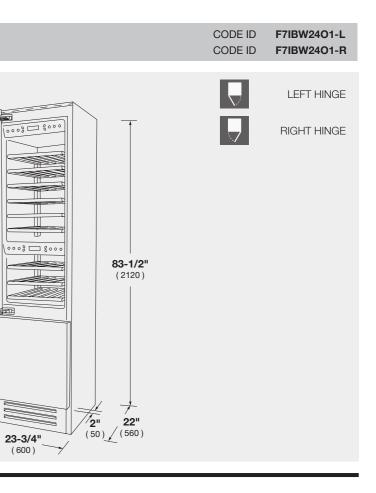

DWG TECHNICAL


REFRIGERATION / DISHWASHER


TECHNICAL DIMENSION

36"

FRENCH DOOR FRIDGE

CODE ID F6FBM36S2 + F6HK36FFBS

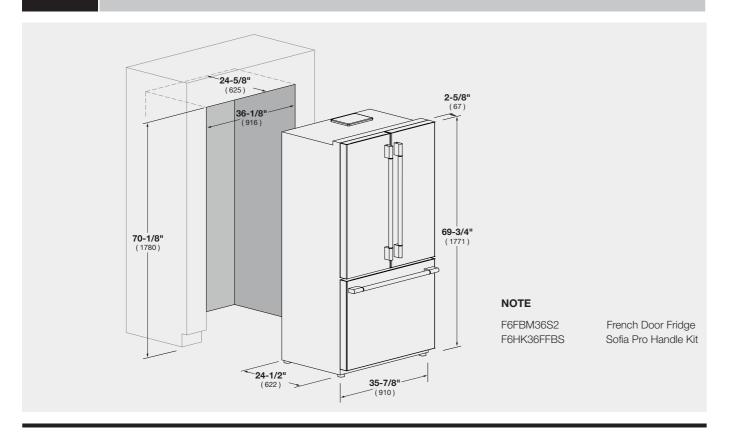

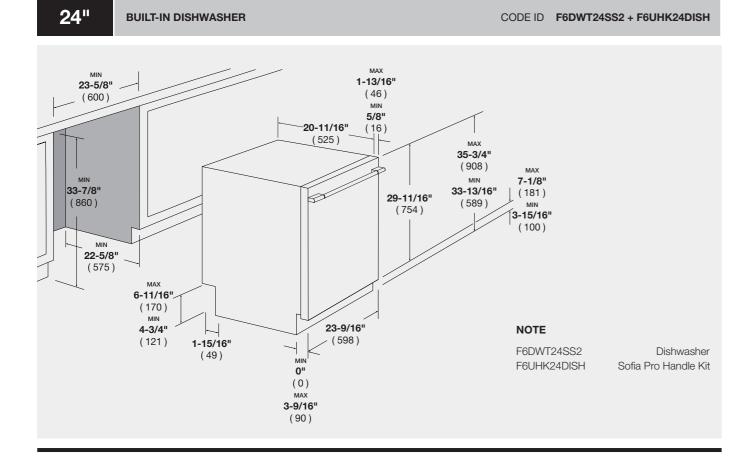



PRODUCTS DRAWINGS DISTINO




DISTINTO OVEN

CODE ID CODE ID F7SP30S1 F7SP30B1 SINGLE OVEN DOUBLE OVEN CODE ID F7DP30S1 SINGLE OVEN 30" 30" DOUBLE OVEN CODE ID F7DP30B1 SINGLE OVEN SINGLE OVEN CODE IDF7SP30W1CODE IDF4SP30S3 DOUBLE OVEN CODE ID F7DP30W1 28-7/16" 28-7/16" (722 (722) **27-3/8**" (695) 50" ~ (1270) **24"** (610) **27-7/8**" (707) **50-3/4"** (1290) 24" 29-3/4" 23-1/8" (610) (754) (587) 29-3/4" 23-1/8" r (754) (587)

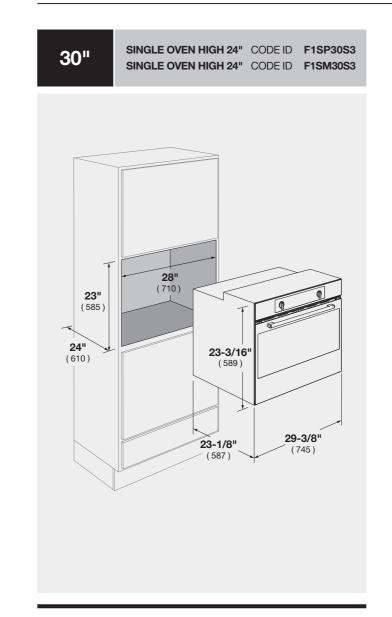


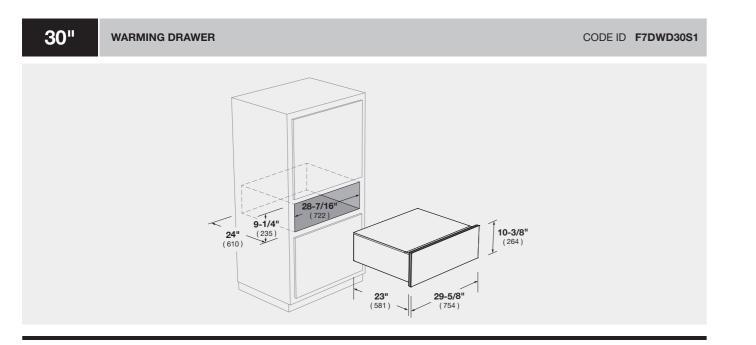

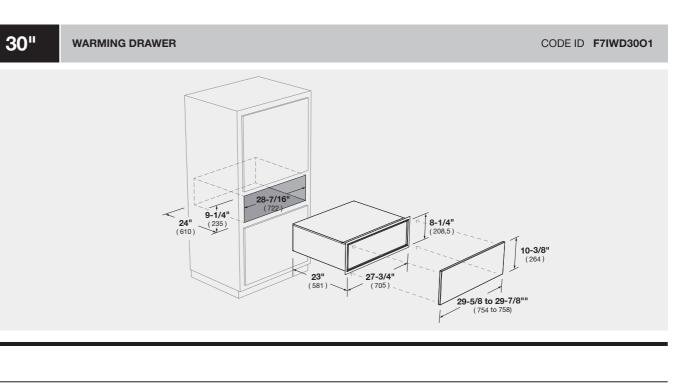


TECHNICAL DIMENSION

DISTINTO OVEN

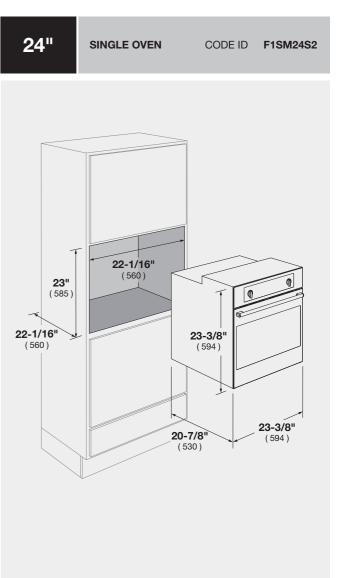


TECHNICAL DWG

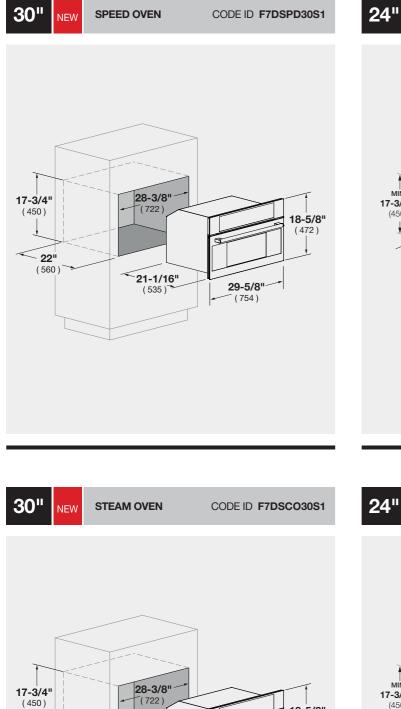


(722)

21-1/16" (535)

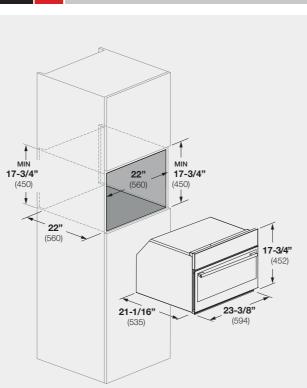


STEAM OVEN

IEV

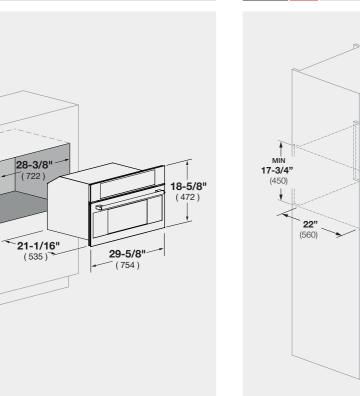


18-5/8" (472)


29-5/8" (754)

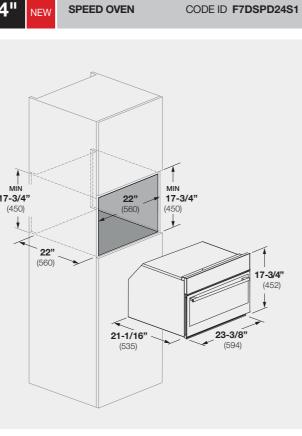

TECHNICAL DIMENSION

CODE ID F7SC024S1

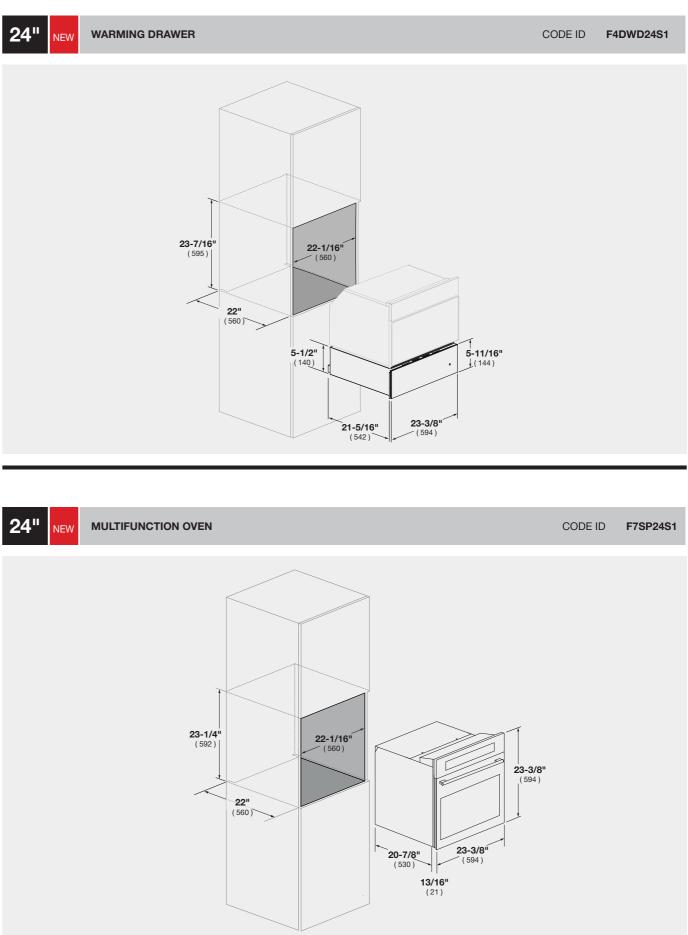

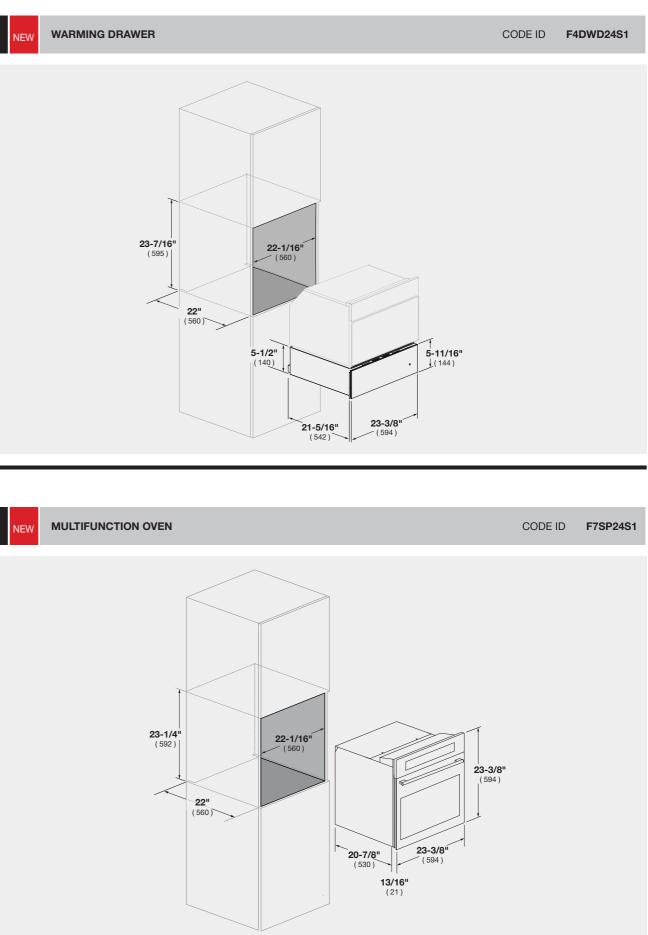

DISTINTO COMPACT COLUMN

DWG TECHNICAL <22"

(560)

DISTINTO MICROWAVES

TECHNICAL DIMENSION

CODE ID F40TR30S1

DISTINTO COFFEE MACHINE

COFFEE MACHINE

17-9/16"

(446)

~ 22"

(560)


28-3/8" (722)


18"


(457)


<


30"

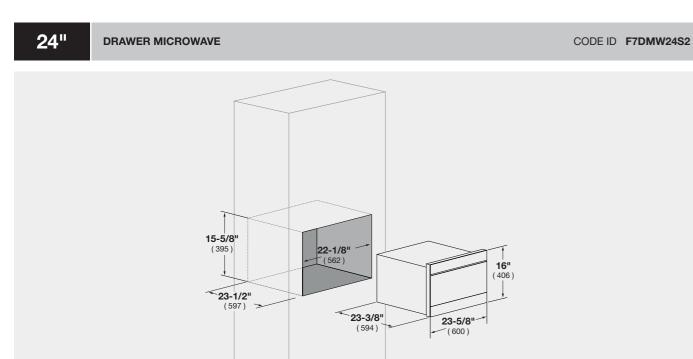


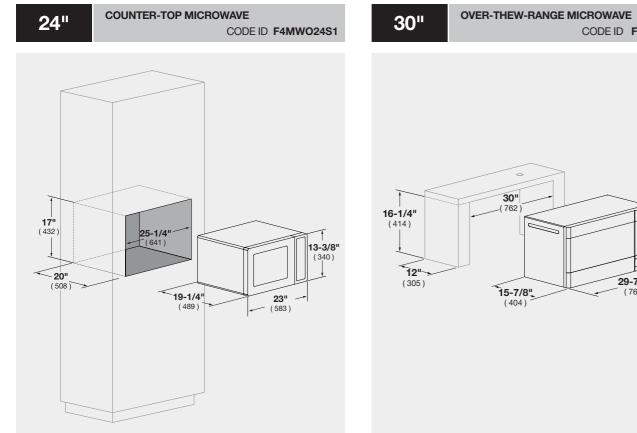



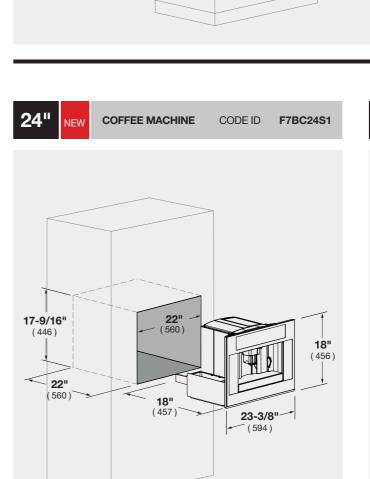

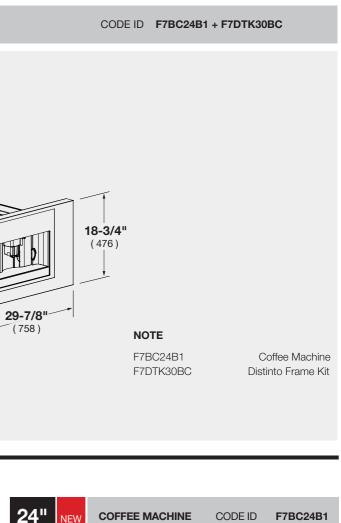

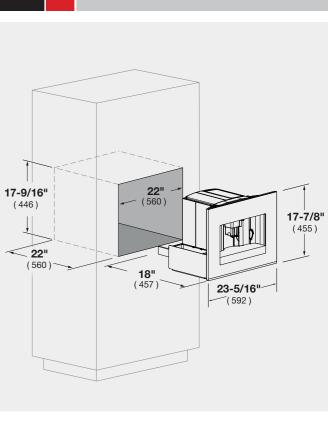



DWG TECHNICAL


DISTINTO PRO GAS COOKTOP


TECHNICAL DIMENSION

DISTINTO COOKTOP GAS

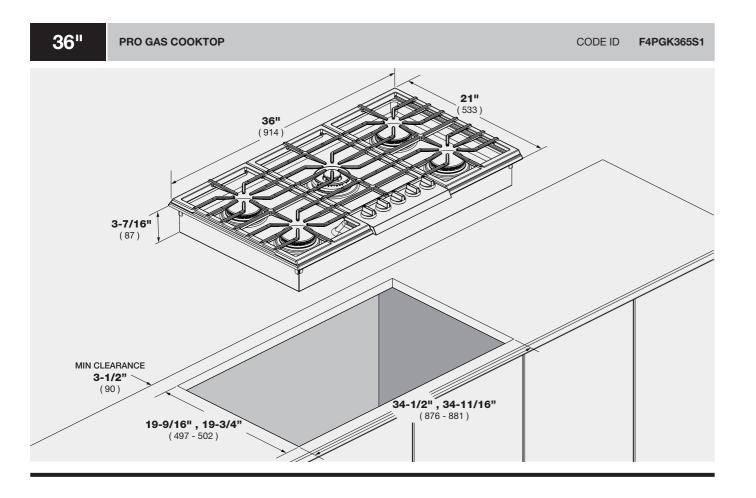

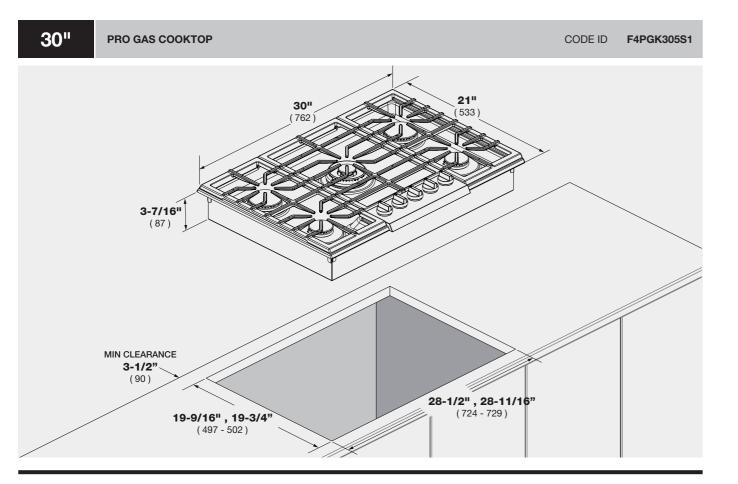

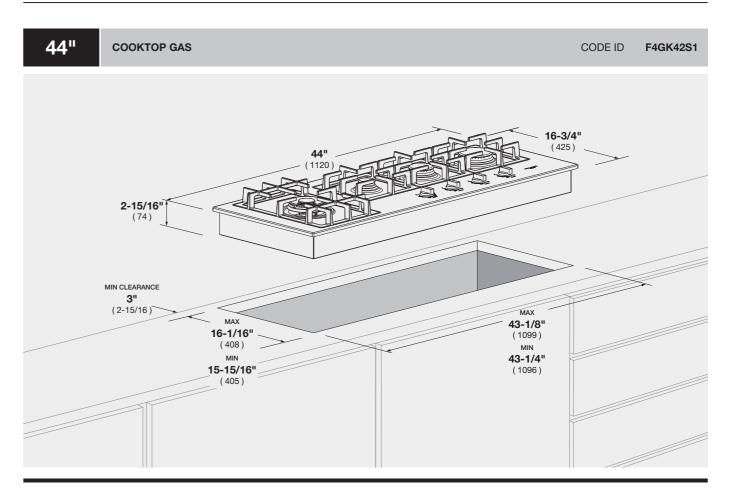

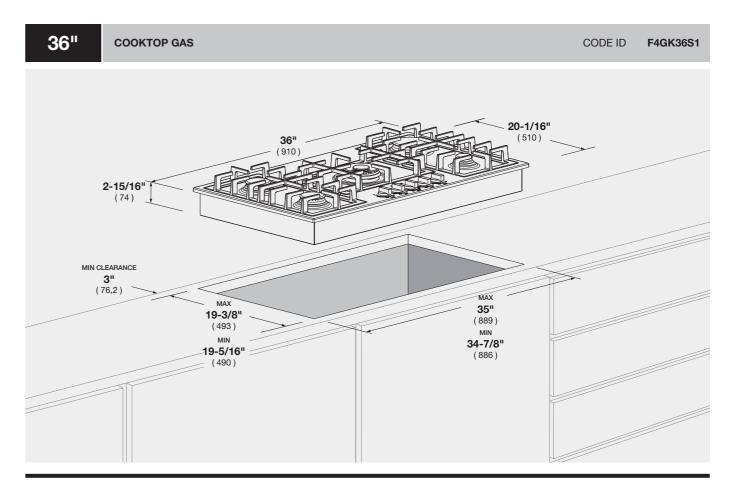



TECHNICAL DWG


DISTINTO COOKTOP GAS


TECHNICAL DIMENSION

DISTINTO COOKTOP INDUCTION

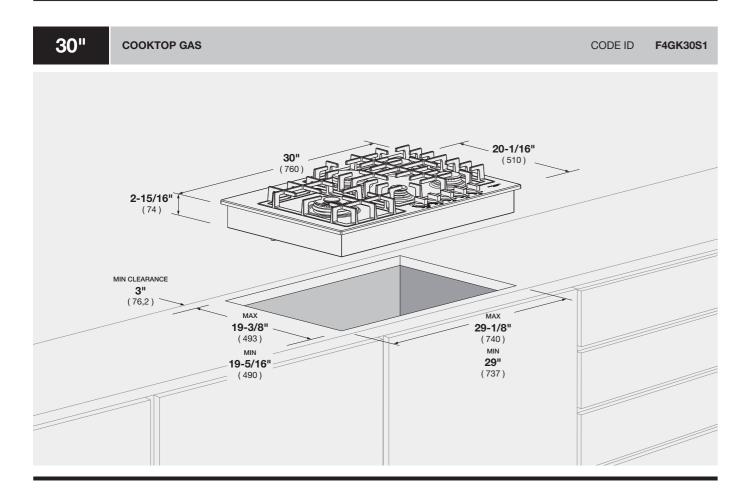

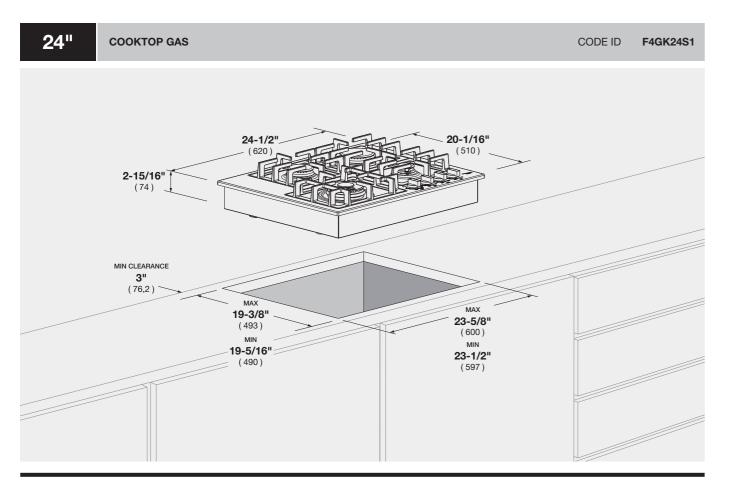

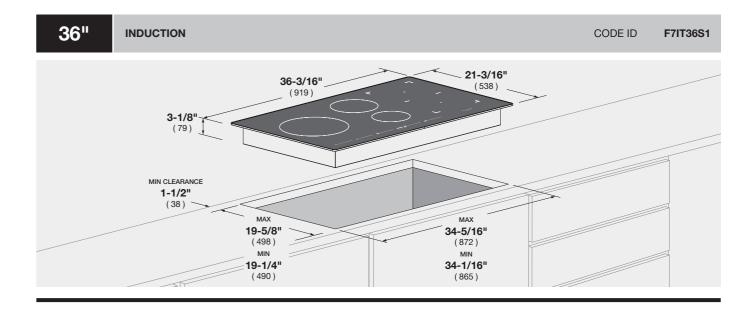


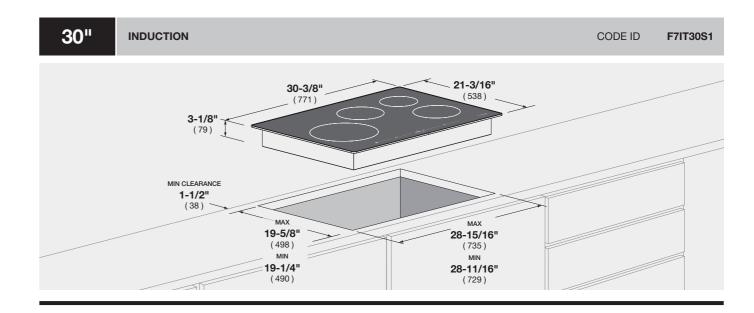



DISTINTO COOKTOP RADIANT


TECHNICAL DIMENSION


DISTINTO VENTILATION

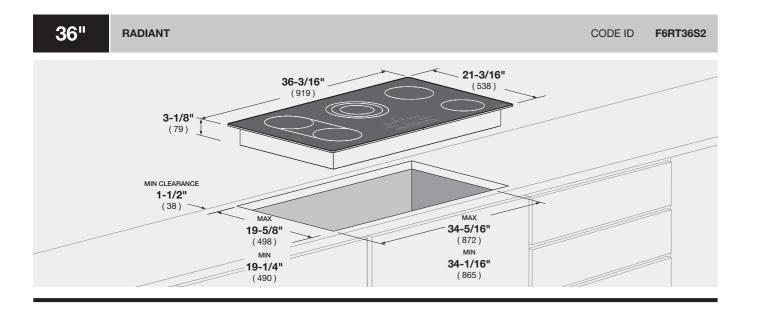


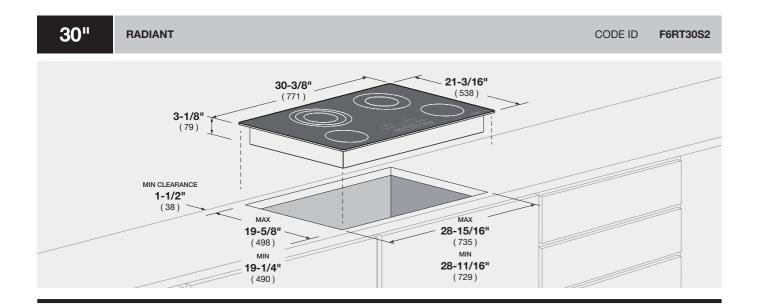

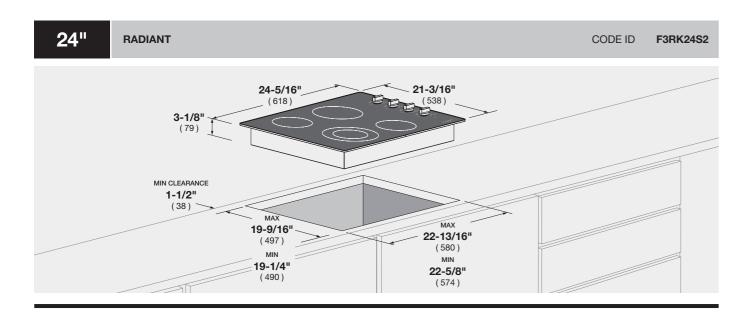


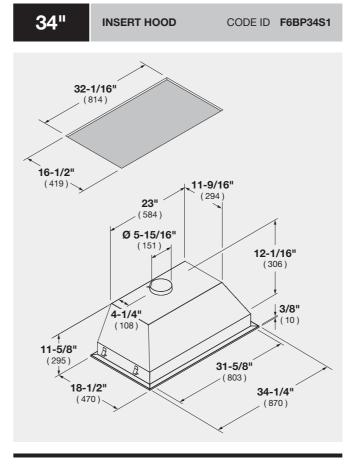

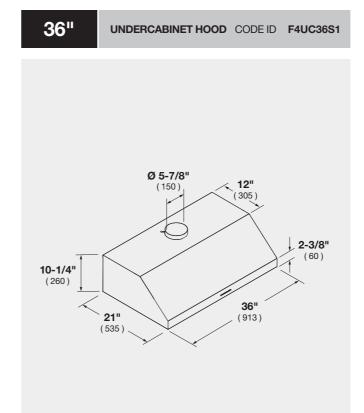

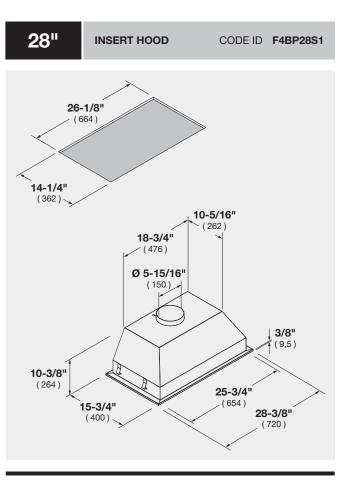


30" UNDERCABINET HOOD CODE ID F4UC30S1





DISTINTO VENTILATION


TECHNICAL DIMENSION

DISTINTO REFRIGERATION

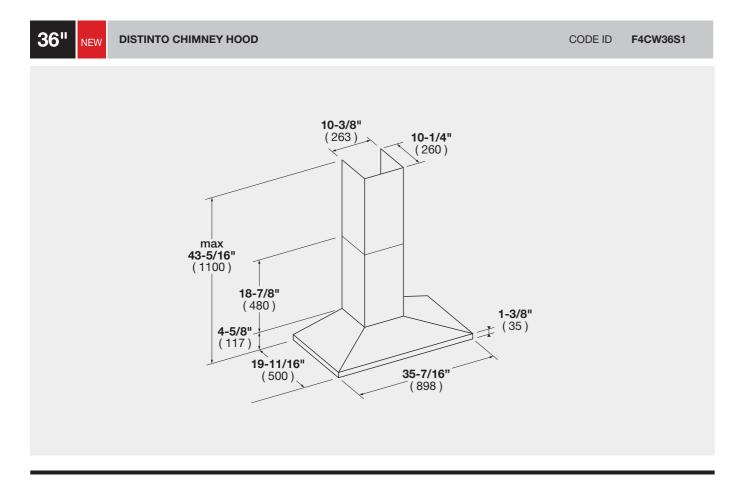

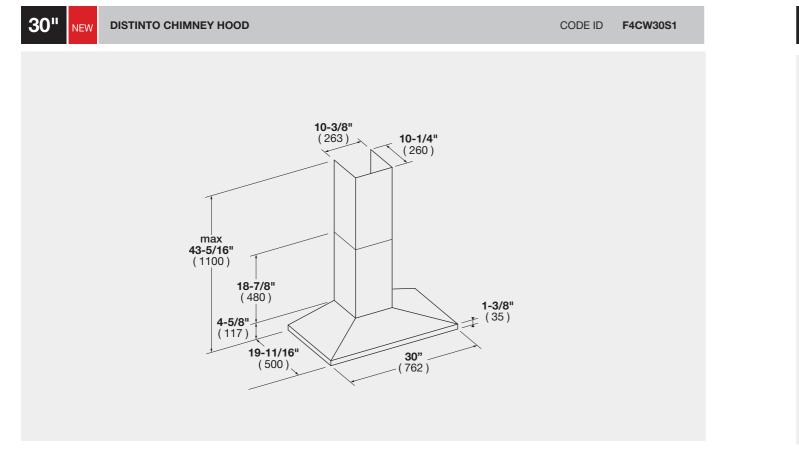

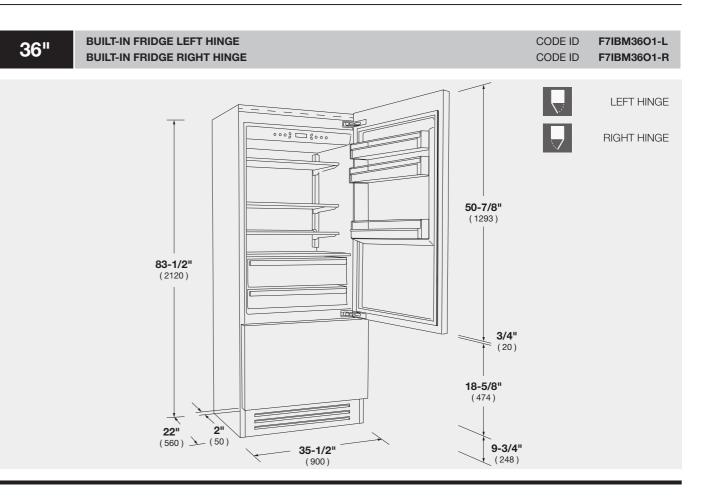

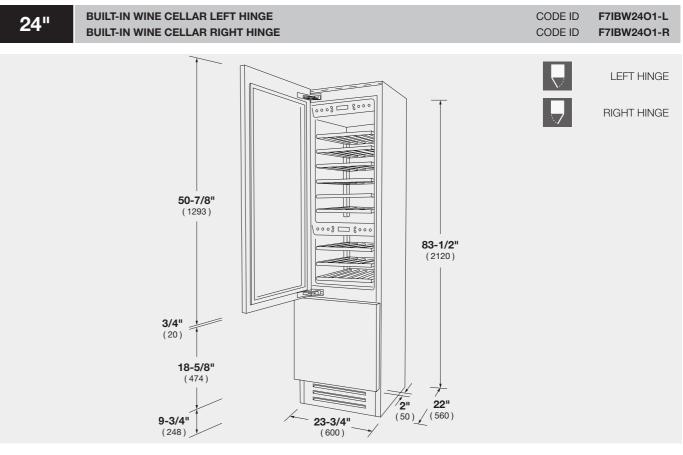



TECHNICAL DWG


REFRIGERATION

TECHNICAL DIMENSION

DISHWASHERS

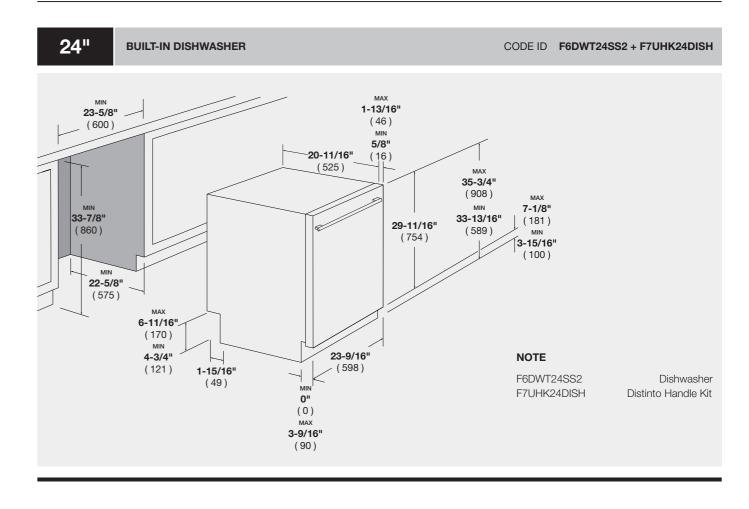

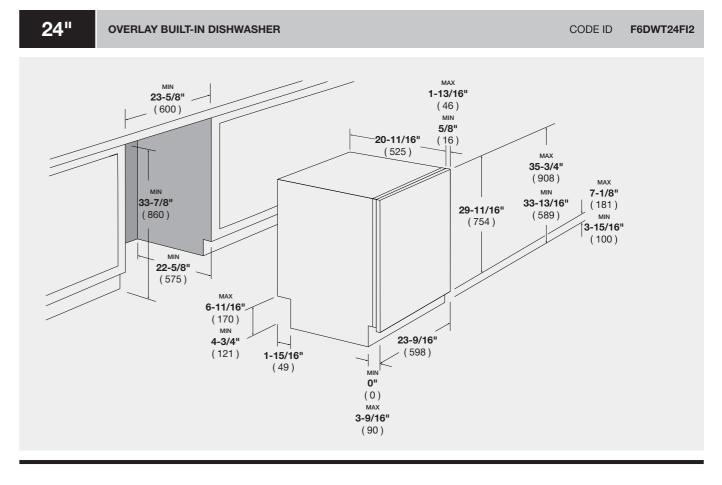

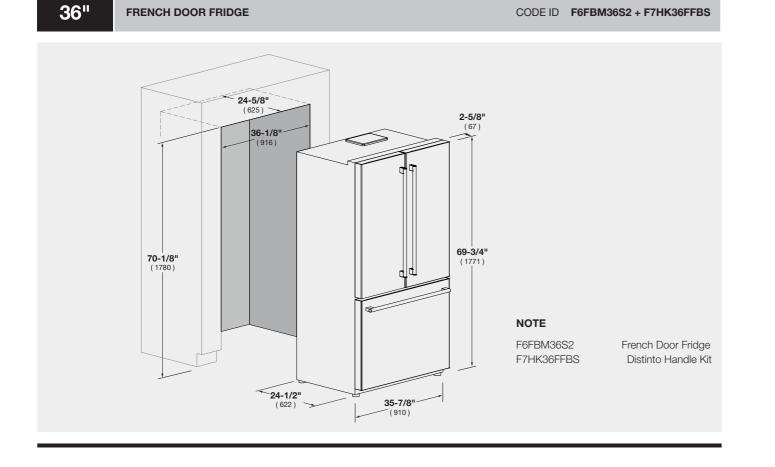

TECHNICAL DWG

TECHNICAL DWG



TECHNICAL DATA PROFESSIONAL

270 FULGOR MILANO

DUAL FUEL PROFESSIONAL RANGE



CODE ID	48" DUAL FUEL PROFESSIONAL RANGE F6PDF486GS1				
Series		6	00		
Finish		Professional Desig	gn - Stainless Steel		
CONTROL PANEL					
Control Type			Duty Knobs		
Oven Programming Display: Clock - Temperature - Function			n 6 Touch Keys e LED		
Language			alish		
COOKTOP		Eng	JII.011		
Туре		GAS (N	G or LP)		
Cooking Surface		Matte Bla	ck Enamel		
GAS COOKTOP FEATURES					
	Electric Re-ignition system Dual Crown Burners (Brass or Alluminum Flame-out sensing Griddle (flat or with rack				
		Mount Injectors	1	ssure Regulator	
		Conversion Kit	110	Source ricgulator	
Heavy Duty Cast Iron Grates			3		
Cooking Zones		6 Burner	+ Griddle		
Burners types			Simmer Burner		
Front-L/Front-R - Power (Max/Min) G20 - 5"			V / 750 (BTU/h) - 220W		
Front-L/Front-R - Power (Max/Min) G31 - 10"		15000 (BTU/h) - 4400V	V / 750 (BTU/h) - 220W		
Rear-L/Front Center "Right"/Rear Center "Right"/ Rear-R - Power (Max/Min) G20 - 5"		18000 (BTU/h) - 5300V	V / 750 (BTU/h) - 220W		
Rear-R/Front Center "Right"/Rear Center "Right"/					
Rear-R - Power (Max/Min) G31 - 10"		15000 (BTU/h) - 4400V	V / 750 (BTU/h) - 220W		
Griddle Burner (Center "Left")	Thermostat Co	ontrol Griddle Burner - 1150	0 (BTU/h) - 3370W / 2000 (BTI I/b) - 500W/	
Power (Max/Min) G20 - 5"/G31 - 10"				,	
OVEN		sory Oven)		in Oven)	
Type Temperature Regulation		ax 170/550°F - 75/290°C)	Electric Self-clean - Dual C Electronic Control (min/m		
OVEN FUNCTIONS		ax 110/0001 10/200 0j		ax 110/0001 10/200 0j	
	Pyrolytic Self-Clean	Bake	Pyrolytic Self-Clean	Daka	
	with automatic door latch	Баке	with automatic door latch	Bake	
	Convection Broil		Convection Broil	Broil	
ELECTRIC OVEN FEATURES	Pizza (Lower Convection)	Oven Lights	Pizza (Lower Convection)	Oven Lights	
ELECTRIC OVEN FEATORES	Preset/Last Used	Preheat Indicator	Preset/Last Used	Preheat Indicator	
	Temperature Memory	(25%, 50%, 75%, 100%)		(25%, 50%, 75%, 100%)	
	Child Door Lock	Control Display Lock		Control Display Lock	
	Automatic Fast Preheat	12/24 Hour Clock Formats	Automatic Fast Preheat	12/24 Hour Clock Formats	
	Sabbath Mode	Temperature Display °C/°F	Sabbath Mode	Temperature Display °C/°F	
			Meat Probe		
OVEN DOOR(S) Oven Glass Window	Deen Embo	ssed Window	Deen Embo	sed Window	
Door Cooling System		stant Glasses	Deep Embossed Window 4 Heat Resistant Glasses		
Door Hinges - Soft-closing System	Heavy Duty	/ Steady Tilt	Heavy Duty	Steady Tilt	
Handle Style	Stainless Steel Tube Ø	30mm, Metal End caps	Stainless Steel Tube Ø	30mm, Metal End caps	
OVEN CAVITY					
Gross Capacity (cbft)		.7		.4	
Usable Capacity (cbft) Cavity Enamel Color		.4 ack		.1 ack	
Rack Positions		6		30N 6	
Oven Lights	1	Halogen	-	Halogen	
HEATING ELEMENTS (@240V)					
Broil Upper Heating Element		100 W		500 W	
Upper Auxiliary Element		00 W		032 W	
Concealed Bake Lower Heating Element		750 W		W 000	
Convection Element OVEN ACCESSORIES	1 X 2	500 W	2 X I	300 W	
Chrome Racks		2		2	
Enameled Broiler Pan (basin + anti splash)		-		1	
Telescopic Chrome Rack		1		1	
DIMENSIONS/WEIGHT					
Overall dim - Width	47 - 3/-			6 mm	
Overall dim - Height (min - max)		8", 38 - 1/4"	923 mm - 97		
Overall dim - Depth	29 - 3/- 529 lbs			mm	
Gross Weight POWER / RATINGS (208/240 V, 60 HZ)	529 lbs		240	kg	
kW / Amps rating at 120-240V, 60Hz		7.00 kW	/ - 31.3A		
kW / Amps rating at 120-208V, 60Hz			/ - 29.5A		
Power Cable		Nema	14-50P		
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual		English / Frei	nch / Spanish		

SOFIA

DUAL FUEL PROFESSIONAL RANGE



CODE ID		DFESSIONAL RANGE F366S1		DFESSIONAL RANGE
Series	600		600	
Finish		gn - Stainless Steel		n - Stainless Steel
CONTROL PANEL				
Control Type	8 Heavy D	Duty Knobs	6 Heavy D	uty Knobs
Oven Programming		h 6 Touch Keys		n 6 Touch Keys
Display: Clock - Temperature - Function		e LED	White	
anguage	English / Fre	nch / Spanish	English / Frer	nch / Spanish
COOKTOP	CAS (N	G or LP)	CAS (N	G or LP)
ype Cooking Surface		ick Enamel	Matte Bla	
AS COOKTOP FEATURES	Matto Bia			
Electric Re-ignition system		•		•
lame-out sensing		•		
op Mount Injectors		•		
P. Conversion Kit		•		
Dual Crown Brass Burner		•		
leavy Duty Cast Iron Grates Cooking Zones		3		2
Jooking Zones Burners types		o /Simmer Burner		+ Simmer Burner
Power Front-L,Front-R (Max/Min) NG		N / 750 (BTU/h) - 220W	, an Dout Fidility	-
Power Front-R (Max/Min) NG		-	20000 (BTU/h) - 5900V	V / 750 (BTU/h) - 220W
Power (Max/Min) NG	18000 (BTU/h) - 5300V	N / 750 (BTU/h) - 220W		V / 750 (BTU/h) - 220W
Power (Max/Min) LP	15000 (BTU/h) - 4400V	N / 750 (BTU/h) - 220W	15000 (BTU/h) - 4400V	V / 750 (BTU/h) - 220W
DVEN				
ype		Convection (True Euro Conv.)	Electric Self-clean - Dual C	
emperature Regulation OVEN FUNCTIONS	Electronic Control (min/m	nax 170/550°F - 75/290°C)	Electronic Control (min/m	ax 170/550°F - 75/290°C
OVEN FUNCTIONS	Pyrolytic Self-Clean	Dehydrate	Pyrolytic Self-Clean	Dehydra
	True Convection	Thaw (Defrost)	True Convection	Thaw (Defro
	Convection Broil	Proof (Warm)	Convection Broil	Proof (War
	Convection Roast	Keep warm (Warm Plus)	Convection Roast	Keep warm (Warm Pl
	Pizza (Lower Convection)	Oven Lights	Pizza (Lower Convection)	Oven Ligi
	Bake	Broil	Bake	Bi
ELECTRIC OVEN FEATURES		1		
	Preset/Last Used	Preheat Indicator	Preset/Last Used	Preheat Indicat
	Temperature Memory	(25%, 50%, 75%, 100%)	Temperature Memory	(25%, 50%, 75%, 100
	Child Door Lock	Control Display Lock	Child Door Lock	Control Display Lo
	Fast Preheat Sabbath Mode	12/24 Hour Clock Formats Temperature Display °C/°F	Fast Preheat Sabbath Mode	12/24 Hour Clock Forma Temperature Display °C/
	Meat Probe	Temperature Display C/ F	Meat Probe	
OVEN DOOR(S)	Medit Hobe		Medit Hobe	
Oven Glass Window	Deep Embossed I	Extra Wide Window	Deep Embossed E	Extra Wide Window
Door Cooling System	4 Heat Resis	stant Glasses	4 Heat Resistant Glasses	
Door Hinges - Soft-closing System	Heavy Duty Steady Tilt			Steady Tilt
landle Style	Stainless Steel Tube	with Metal End caps	Stainless Steel Tube	with Metal End caps
OVEN CAVITY				
Gross Capacity (cbft) Jsable Capacity (cbft)		.7 .9		.41
Cavity Enamel Color		ack		ack
Aack Positions		6		6
Oven Lights		Halogen		Halogen
IEATING ELEMENTS (@240V)				
Broil Upper Heating Element		500 W		500 W
Ipper Auxiliary Element		032 W	1032 W	
Concealed Bake Lower Heating Element		000 W		000 W
Convection Element	2 x 1	300 W	2 x 13	300 W
OVEN ACCESSORIES Chrome Racks		2		2
nameled Broiler Pan (basin + anti splash)		<u> </u>		<u>-</u> 1
elescopic Chrome Rack		1		1
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 3/4"	910 mm	29 - 3/4"	758 mm
Overall dim - Height (min - max)	35 - 3/8", 37 - 1/4"	898 mm - 947mm	36 - 3/8", 38 - 1/4"	923 mm - 972 mm
Overall dim - Depth	29 - 3/4"	756 mm	29 - 3/4"	756 mm
Gross Weight	382 lbs	174 kg	326 lbs	148 kg
POWER / RATINGS (208/240 V, 60 HZ)	0.07114	1 16 0 4	0.07110	16.04
W / Amps rating at 120-240V, 60Hz W / Amps rating at 120-208V, 60Hz		/ - 16.9A / - 17.5A		- 16.9A - 17.5A
Power Cable		14-50P		- 17.5A 14-50P
NSTRUCTIONS FOR USE	1 verna		riverna	
			English / Erg	ach (On anich
Ise & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / English	nch / Spanish



TECHNICAL DATA

ALL GAS PROFESSIONAL RANGE



CODE ID	48" ALL GAS PROFESSIONAL RANGE F6PGR486GS2				
Series	600 Series				
Finish		Professional Desig	n - Stainless Steel		
CONTROL PANEL Control Type		11 Heavy [Duty Knobs		
Oven Programming		Electronic with	6 Touch Keys		
Display: Clock - Temperature - Function			LED		
COOKTOP		Eng	llish		
Туре			G or LP)		
Cooking Surface GAS COOKTOP FEATURES		Matte Bla	ck Enamel		
GAS COOKTOP FEATORES	Electric Re-ignition system Dual Crown Burners (Brass or Alluminum)				
	Flame-out sensing Griddle (flat or with rack)			ilat or with rack)	
		Mount Injectors Conversion Kit	Pre	ssure Regulator	
Heavy Duty Cast Iron Grates	L.I.		3		
Cooking Zones			+ Griddle		
Burners types Front-L/Front-R - Power (Max/Min) G20 - 5"			Simmer Burner V / 750 (BTU/h) - 220W		
Front-L/Front-R - Power (Max/Min) G20 - 3			V / 750 (BTU/h) - 220W		
Rear-L/Front Center "Right"/Rear Center "Right"/		18000 (BTU/h) - 5300V	V / 750 (BTU/h) - 220W		
Rear-R - Power (Max/Min) G20 - 5" Rear-R/Front Center "Right"/Rear Center "Right"/		· · · ·			
Rear-R - Power (Max/Min) G31 - 10"		15000 (BTU/h) - 4400V	V / 750 (BTU/h) - 220W		
Griddle Burner (Center "Left")	Thermostat Control Griddle Burner - 11500 (BTU/h) - 3370W / 2000 (BTU/h) - 590W				
Power (Max/Min) G20 - 5"/G31 - 10" OVEN		sory Oven)		*	
Туре		vith Single Fan	30" (Main Oven) Multifunction with Dual Convection		
Temperature Regulation			Electronic probe		
OVEN FUNCTIONS	Down Bake	Broil	Down Bake	Broil "Super Nova"	
	Dehydrate	Convection Roast		Convection Roast	
	Pizza (Lower Convection)	Oven Lights	Pizza (Lower Convection)	Sabbath Mode	
GAS OVEN FEATURES	Electric Flame Ignition	Flame out sensing	Electronic Temp. Control	Flame out sensing	
	Gas safety devices	Tiame out sensing		Timing Cooking Functions	
	L.P. Conversion Kit		Gas safety devices	12 Hour Clock Formats	
OVEN DOOR(S)			L.P: Conversion Kit	Pizza Function	
Oven Glass Window	Deep Embos	ssed Window	Deep Embos	ssed Window	
Door Cooling System		tant Glasses	4 Heat Resistant Glasses		
Door Hinges - Soft-closing System Handle Style		Steady Tilt 30mm, Metal End caps	Heavy Duty Steady Tilt Stainless Steel Tube Ø30mm, Metal End caps		
OVEN CAVITY				comm, motar End oupo	
Gross Capacity (cbft)		.7		.4	
Usable Capacity (cbft) Cavity Enamel Color		.4 ack	4.1 Black		
Rack Positions	(6	6		
Oven Lights BROIL BURNER	2x20W	Halogen	3x20W Halogen		
Power Natural Gas	8000 (BTL	J/h) - 2300W	14000 (BTU/h) - 4102W		
Power Propane		J/h) - 2300W	13000 (BTU/h) - 3800W		
BAKE BURNER Power Natural Gas	9500 (RTU)	/h) - 2800W	19000 (PTL)	/b) 5200W/	
Power Propane		/h) - 2800W	18000 (BTU/h) - 5300W 16000 (BTU/h) - 4700		
OVEN ACCESSORIES					
Chrome Racks Enameled Broiler Pan (basin + anti splash)		-		2	
Telescopic Chrome Rack		1		1	
DIMENSIONS/WEIGHT		4.11			
Overall dim - Width Overall dim - Height (min - max)	47 - 3/4 36 - 3/8	4" 3", 38 - 1/4"	121 923 mm - 97	6 mm 2 mm	
Overall dim - Depth	29 - 3/4			mm	
Gross Weight	529 lbs	; 	240	kg	
POWER / RATINGS (120 V, 60 HZ) Watts / Amps		1500 W	- 12.5 A		
Power Cable			5-15P		
INSTRUCTIONS FOR USE			ah / Chanist		
Use & Care Manual / Installation Manual		English / Frei	nch / Spanish		

SOFIA

ALL GAS PROFESSIONAL RANGE



CODE ID	DE ID 36" ALL GAS PROFESSIONAL RANGE F6PGR366S2			ESSIONAL RANGE
Series	61	00	60	00
Finish	Professional Desig	gn - Stainless Steel	Professional Design - Stainless Steel	
CONTROL PANEL				
Control Type Display: Temperature - Function		outy Knobs e LED		outy Knobs e LED
Ignition/Temperature control		e LED min/max 170/550°F)		e LED min/max 170/550°F)
COOKTOP				
Туре		G or LP)		G or LP)
Cooking Surface	Matte Bla	ck Enamel	Matte Bla	ck Enamel
GAS COOKTOP FEATURES Electric Re-ignition system				•
Flame-out sensing	•			•
Top Mount Injectors		•		•
L.P. Conversion Kit		•		•
Dual Crown Brass Burner		•		•
Heavy Duty Cast Iron Grates	3			2
Cooking Zones Burners types	6 All Dual Flame/Simmer Burner			4 /Simmer Burner
Power Front-L,Front-R (Max/Min) NG		V / 750 (BTU/h) - 220W		
Power Front-R (Max/Min) NG	20000 (210/1) 00000	-	20000 (BTU/h) - 5900V	- V / 750 (BTU/h) - 220W
Power (Max/Min) NG	18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W		18000 (BTU/h) - 5300V	V / 750 (BTU/h) - 220W
Power (Max/Min) LP	15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W		15000 (BTU/h) - 4400V	V / 750 (BTU/h) - 220W
OVEN		Ormunation		O
Type Temperature Regulation		Convection mostat control		Convection mostat control
OVEN FUNCTIONS	Electronic (ner		Electronic ther	
	Bake		Ba	ake
		roil	Broil	
	Piz	zza	Piz	zza
GAS OVEN FEATURES				
-		lame Ignition It Sensing		lame Ignition
-		it Auto-off		It Sensing
-		h Mode	Flame-out Auto-off Sabbath Mode	
-	L.P. Conversion Kit			version Kit
OVEN DOOR(S)				
Oven Glass Window		Extra Wide Window	· · ·	Extra Wide Window
Door Cooling System		stant Glasses		stant Glasses
Door Hinges - Soft-closing System Handle Style		v Steady Tilt with Metal End caps		v Steady Tilt with Metal End caps
OVEN CAVITY	Stainless Steel Tube	with Metal End caps	Stainless Steel Tube	with Metal End caps
Gross Capacity (cbft)	5	.7	4	.4
Usable Capacity (cbft)	4	.4		.6
Cavity Enamel Color		ack	Black	
Rack Positions		6	6	
	3x20W	Halogen	3x20W Halogen	
NOVA BROILER SYSTEM BURNER Power (Max) NG	19000 /071	l/h) - 5300W		(b) - 4102\W
Power (Max) NG Power (Max) LP		l/h) - 5300W	14000 (BTU/h) - 4102W 13000 (BTU/h) - 3800W	
BAKE BURNER			10000 (D10	,
Power (Max) NG		I/h) - 6300W		l/h) - 5300W
Power (Max) LP	21500 (BTU	l/h) - 6300W	16000 (BTU	l/h) - 4700W
OVEN ACCESSORIES				
Chrome Racks		2	2	
Enameled Broiler Pan (basin + anti splash) Telescopic Chrome Rack	1		1 1	
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 3/4"	910 mm	29 - 3/4"	758 mm
Overall dim - Height (min - max)	35 - 3/8", 37 - 1/4"	898 mm - 947 mm	36 - 3/8", 38 - 1/4"	923 mm - 972 mm
<u>j</u> ,	29 - 3/4"	756 mm	29 - 3/4"	756 mm
Overall dim - Depth	377 lbs	171 kg	322 lbs	146 kg
Overall dim - Depth Gross Weight	377 105			
Overall dim - Depth Gross Weight POWER / RATINGS (120 V, 60 HZ)		1 50	00011	
Overall dim - Depth Gross Weight POWER / RATINGS (120 V, 60 HZ) Watts / Amps	600W	V - 5A		V - 5A
Overall dim - Depth Gross Weight POWER / RATINGS (120 V, 60 HZ)	600W	V - 5A 5-15P		V - 5A 5-15P



TECHNICAL DATA

INDUCTION PROFESSIONAL RANGE





SOFIA

PROFESSIONAL OVEN



	-		1.0	
CODE ID		DFESSIONAL RANGE 365S1		DFESSIONAL RANGE 304S1
Series	60	00	600	
Finish	Professional Desig	n - Stainless Steel	Professional Desig	n - Stainless Steel
	0 Llagur D	ut Kasha	C Llagur D	ut Kasha
Control Type Oven Programming		uty Knobs n 6 Touch Keys		uty Knobs n 6 Touch Keys
Display: Clock - Temperature - Function		e LED		e LED
Language	Eng	llish	English / Frer	nch / Spanish
СООКТОР Туре	INDU	CTION	INDU	CTION
Cooking Surface		c Glass		c Glass
INDUCTION COOKTOP FEATURES				
	Pot Detection System Melting Function	Residual Heat Indication Simmering Function	Pot Detection System Melting Function	Residual Heat Indication Simmering Function
	113°F / 45°C	158°F / 70°C (113°F / 45°C	158°F / 70°C
	Digital Display	Booster/Fast Boil	Digital Display	Booster/Fast Boil
	for Power Level	Function for Each Zone	for Power Level	Function for Each Zone
	Failure Codes Indication Cooling Fan System	Power Levels: 1 to 9 Heat up time automatic	Failure Codes Indication Cooling Fan System	Power Levels: 1 to 9 Heat up time automatic
	Child Lock Function	Digital minute minder	Child Lock Function	Cooking Zones: 4
	Knob for power setting	Cooking Zones: 5	Knob for power setting	
Burners types (Front-L) - Power (Max/Booster) Burners types (Rear-L) - Power (Max/Booster)	Inductor 9" Inductor 7"	(230 mm) 2300W / 3700W (180 mm) 1850W / 3000W	Inductor 9" Inductor 6 - 1/2"	(230 mm) 2300W / 3700W (165 mm) 1400W / 2200W
Burners types (Center dual circuit) - Power (Max/Booster)		(280 mm) 3000W / 5500W		-
Burners types (Center single circuit) - Power (Max/Booster)	Inductor 7"	(180 mm) 1850W / 2600W		-
Burners types (Front-R) - Power (Max/Booster)	Inductor 9"	(230 mm) 2300W / 3700W	Inductor 7 - 3/4"	(200 mm) 1850W / 3000W
Burners types (Rear-R) - Power (Max/Booster)	Inductor 7"	(180 mm) 1850W / 3000W	Inductor 7 - 3/4"	(200 mm) 1850W / 3000W
Туре	Electric Self-clean - Dual C	onvection (True Euro Conv.)	Electric Self-clean - Dual C	Convection (True Euro Conv.)
Temperature Regulation	Electronic Control (min/m	ax 170/550°F - 75/290°C)	Electronic Control (min/max 170/550°F - 75/290°C)	
OVEN FUNCTIONS	Pyrolytic Self-Clean	Broil	Pyrolytic Self-Clean	Broil
	True Convection	Dehydrate	True Convection	Dehydrate
	Convection Broil	Thaw (Defrost)	Convection Broil	Thaw (Defrost)
	Convection Roast Pizza (Lower Convection)	Proof (Warm) Keep warm (Warm Plus)	Convection Roast Pizza (Lower Convection)	Proof (Warm) Keep warm (Warm Plus)
	Bake	Oven Lights	Bake	Oven Lights
ELECTRIC OVEN FEATURES	D 1/1 111 1			
	Preset/Last Used Temperature Memory	Preheat Indicator (25%, 50%, 75%, 100%)	Preset/Last Used Temperature Memory	Preheat Indicator (25%, 50%, 75%, 100%)
	Child Door Lock	Control Display Lock	Child Door Lock	Control Display Lock
	Automatic Fast Preheat	12/24 Hour Clock Formats	Fast Preheat	12/24 Hour Clock Formats
	Sabbath Mode Meat Probe	Temperature Display °C/°F	Sabbath Mode Meat Probe	Temperature Display °C/°F
OVEN DOOR(S)	Weat Flobe		Weat FIDDe	
Oven Glass Window		ssed Window		Extra Wide Window
Door Cooling System Door Hinges - Soft-closing System		tant Glasses	4 Heat Resistant Glasses Heavy Duty Steady Tilt	
Handle Style		v Steady Tilt e Ø30mm, Pro Style	Stainless Steel Tube with Metal End caps	
OVEN CAVITY		,		
Gross Capacity (cbft) Usable Capacity (cbft)		.7		.4
Cavity Enamel Color		.9 ack	4.1 Black	
Rack Positions		6	6	
Oven Lights	3x20W	Halogen	3x20W	Halogen
HEATING ELEMENTS (@240V) Broil Upper Heating Element	31	500 W	3500 W	
Upper Auxiliary Element		032 W		032 W
Concealed Bake Lower Heating Element		W 000		W 000
Convection Element OVEN ACCESSORIES	2 x 13	300 W	2 x 13	300 W
	2 Chrome Racks	1 Telescopic Chrome Rack	2 Chrome Racks	1 Telescopic Chrome Rack
	1 Enameled Broiler Pan		1 Enameled Broiler Pan	
DIMENSIONS/WEIGHT	(basin + anti splash)		(basin + anti splash)	
Overall dim - Width	35 - 3/4"	910 mm	29 - 3/4"	758 mm
Overall dim - Height (min - max)	35 - 3/8", 37 - 1/4"	898 mm - 947 mm	36 - 3/8", 38 - 1/4"	923 mm - 972 mm
Overall dim - Depth	29 - 3/4"	756 mm	29 - 3/4"	756 mm
Gross Weight POWER / RATINGS (208/240 V, 60 HZ)	382 lbs	174 kg	311 lbs	141 kg
kW / Amps rating at 120-240V, 60Hz		Maximum Output Amp.)		- 45.8A
kW / Amps rating at 120-208V, 60Hz		Maximum Output Amp.)		- 48.5A
Power Cable INSTRUCTIONS FOR USE	Nema	14-50P	Nema	14-50P
Use & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Fre	nch / Spanish
	igiloi17110			

CODE ID	30" PROFESSIONAL SINGLE OVEN F6PSP30S1		30" PROFESSIONAL DOUBLE OVEN F6PDP30S1	
Series	6	600	600	
Finish	Professional Desi	gn - Stainless Steel	Professional Desig	n - Stainless Steel
CONTROL PANEL				
Control Type	2 Heavy /	Duty Knobs	2 Heavy D	uty Knobs
Oven Programming		th 6 Touch Keys		6 Touch Keys
Display: Clock - Temperature - Timer		te LED	White	
Language		glish		lish
OVEN	En	gilsti	Ling	JIISH
Туре	Dual True	Convection	Dual True (Convection
Temperature Regulation		nax 170/550°F - 75/290°C)		ax 170/550°F - 75/290°C)
OVEN FUNCTIONS			(
	Pyrolytic Self-Clean	Broil	Pyrolytic Self-Clean	Bro
	True Convection	Dehydrate	True Convection	Dehydra
	Convection Bake	Thaw (Defrost)	Convection Bake	Thaw (Defros
· · · · · · · · · · · · · · · · · · ·	Convection Broil	Proof (Warm)	Convection Broil	Proof (Warr
	Convection Broast	Keep warm (Warm Plus)	Convection Broast	Keep warm (Warm Plu
	Pizza (Lower Convection)	Oven Lights	Pizza (Lower Convection)	Oven Ligh
	Bake	Overi Lights	Bake	Oven Ligi
ELECTRIC OVEN FEATURES	Dare	1	Dare	
	Preset/Last Used	Preheat Indicator	Preset/Last Used	Preheat Indicat
	Temperature Memory	(25%, 50%, 75%, 100%)	Temperature Memory	(25%, 50%, 75%, 100%
	Control Display Lock	(25%, 50%, 75%, 100%) Sabbath Mode	Control Display Lock	Sabbath Mod
	Child Door Lock	Temperature Display °C/°F	Child Door Lock	Temperature Display °C/
	Meat Probe	Temperature Display C/ P	Meat Probe (Upper Oven Only)	
OVEN DOOR(S)	Weat Flobe		Meat Probe (Opper Overt Only)	
		Through Class	Larga Caa Th	wayah Class
Oven Glass Window		Through Glass		nrough Glass
Door Cooling System		stant Glasses		tant Glasses
Door Hinges - Soft-closing System		y Steady Tilt	, ,	r Steady Tilt r Steel
Handle Style	Tubular Steel		Tubula	r Steel
OVEN CAVITY		4.4		4
Gross Capacity (cbft) Usable Capacity (cbft)		4.4		4
Cavity Enamel Color		4.1 Ioak	4	
Rack Positions		lack 6		ack S
Oven Lights		Halogen		Halogen
HEATING ELEMENTS (@240V)	3x2000	Halogen	3X2000	паюден
Broil Upper Heating Element		3500 W		00.11/
	-		3500 W	
Upper Auxiliary Element		032 W	1032 W	
Concealed Bake Lower Heating Element Convection Element		8000 W	3000 W 2 x 1300 W	
	2 X I	300 W	2 X 13	300 W
OVEN ACCESSORIES		2	2 1 1	
Chrome Racks		2	2 on bot	
Enameled Broiler Pan (basin + anti splash)		1	1 on bot	
Telescopic Chrome Rack		1	1 on bot	in ovens
DIMENSIONS/WEIGHT	00 44/20"	75.4		75.4
Overall dim - Width	29 - 11/16"	754 mm	29 - 11/16"	754 mm
Overall dim - Height	27 - 7/8"	707 mm	51"	1295 mm
Overall dim - Depth	24"	610 mm	24"	610 mm
Cut-out - Width	28 - 7/16"	722 mm	28 - 7/16"	722 mm
Cut-out - Height (min)	27 - 3/8"	696 mm	50"	1270 mm
Cut-out - Depth (min)	23 - 1/4"	590 mm	23 - 1/4"	590 mm
Gross Weight	198 lbs	90 kg	340 lbs	154 kg
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz		N - 16.9A		- 33.8A
kW / Amps rating at 208V, 60Hz		N - 17.5A		- 32.4A
Power Cable	Со	nduit	Con	Iduit
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish		English / French / Spanish	





PROFESSIONAL WARMING DRAWER

SOFIA

PROFESSIONAL OVEN



CODE ID	30" PROFESSIONAL F6PWI		
Туре	Warming	Drawer	
Front finish	Stainless Steel w	rith Pro - Handle	
Internal shelf	Inc	X	
Compatible with ovens	F6PSP30S1 -	F6PDP30S1	
PERFORMANCE			
Maximum temperature	194°F.	/ 90°C	
Cooking at low temperature (slow cooking)	٩		
Leavening	٩		
Heating dishes and food	•		
Slow close assistance	•		
Open / Close push - pull system	-		
CONTROL			
Thermostat	86°F - 194°F /	/ 30°C - 90°C	
Fan assisted	•		
Function Indicator / Thermostat on/off	•		
SAFETY			
Safety front	•		
ELECTRICAL SPECIFICATIONS			
Max power absorbed (W)	110	OW	
Power (V-Hz)	120/60		
Power cord	•		
Plug	•		
CAPACITY			
Volume (cbft-litri)	2,1	61.4	
DIMENSIONS			
Overall dim - Width	29 - 7/8"	758 mm	
Overall dim - Height	10 - 3/8"	264 mm	
Overall dim - Depth	23"	583 mm	
Door Depth with Overlay	2 - 1/8"	54 mm	
Door Depth with Pro Handle	4 - 11/16"	119 mm	
Cut-out - Width	28 - 7/16"	722 mm	
Cut-out - Height	9 - 1/4"	235 mm	
Cut-out - Depth	24"	610 mm	
WEIGHT			
Net Weight	68.5 lbs	31 Kg	
Gross Weight	75.2 lbs	34.1 Kg	

CODE ID		SPEED OVEN SPD30S1		STEAM OVEN 030S1
Туре	Microwav	e - Speed Oven	Steam + f	an assisted
Finish	Stai	nless steel	Stainle	ss steel
Temperature Regulation	Electronic		Elec	tronic
FUNCTIONS				
Microwave / Steam cook		•/-	-,	•
Steam reheat		-		•
Microwave / Steam convection		•		•
Steam clean / circuit		-		•
5 minute steam		-		•
Convection bake		-		•
Convection roast		•		•
Convection broil		•		•
Broil		•		•
Eco convection bake		-		
Recipes		•		•
Oven Lights		•		•
-		-		-
CONTROL PANEL		P. Electropia	MODULAD	Electropia
Control type		R - Electronic	MODULAR	
Display	TI	FT 3.5"	TFT	
Menu Recipes		•		•
Commands	Dual Full T	ouch Keyboard		ch Keyboard
Language		4	4	
SPECIAL FEATURES				
Manual Fast Preheat		-	•	
Meat Probe		-	•	
12/24 hour clock format		•		•
°C/°F		•		
OVEN DOOR(S)				
Cool door		•		•
OVEN CPACITY				
Gross Capacity (cuft)		1.2	1	.2
Usable Capacity (cuft)		1.0	1	.0
Cavity Enamel Color	Stainless Steel			ss Steel
Rack Positions	3			3
Oven Lights		V Halogen	1x20W	
Broil Upper Heating Element Steamer	1500W (240V)			(240V)
Lower Element Wattage	-			(240V) (240V)
Convection Element Wattage			2300W	<u> </u>
ACCESSORIES	2000	(2400)	2000	(2+01)
Chrome racks		1		1
Stainless Steel Tray		•		•
Telescopic chrome rack		-		-
SIZE				
Overall dim - width	29 - 7/8"	758 mm	29 - 7/8"	758 mm
Overall dim - height	18 - 5/8"	473 mm	18 - 5/8"	473 mm
Overall dim - depth	21"	533 mm	21"	533 mm
Cutout - width	25 - 3/4"	654 mm	25 - 3/4"	654 mm
Cutout - height (min)	18"	458 mm	18"	458 mm
Cutout - depth (min)	22"	560 mm	22"	560 mm
POWER / RATINGS KW/Amps rating at 240V, 60Hz	0 AL	W - 14A	3 0P/W	- 13.7A
KW/Amps rating at 2400, 60Hz		W - 14A W - 13A		- 13.7A - 11.9A
Microwave input power		850 W	2.40KVV	
Microwave output power		000 W		-
Frequency		50 MHz		-
Cable + Conduit		•		•
INSTRUCTION FOR USE				
Use & Care Manual / Installation Manual		, SP, FR	EN, S	2 52







CODE ID	30" PROFESSIONAL BUILT-IN COFFEE MACHINE F7BC24B1 (coffee machine) + F6PTK30BC (frame kit)				
Туре	Coffee mad	chine			
Finish	Stainless s	steel			
PERFORMANCE					
Total no. of modes	30				
Automatic modes	Coffee, Steam,	Hot water			
Programming	Full touch ele	ectonic			
Energy efficiency	А				
Annual energy consume (kWh)	45				
Water tank capacity	60 fl. oz	1,8 L			
Coffee container capacity	7 oz	200 g			
Automatic Coffee grinder with 13 levels regulations	•				
Cups of coffee nr.	2				
Coffee dispenser height regulation 3.14 - 3.93 in / 80 - 100 mm	•				
Retractable dispenser for steam and hot water	•				
LED lighting	•				
Filter	•				
Automatic cleaning program	•				
Milk container 25 fl.oz	•				
Drip tray	•				
Water tank refill warning light	•				
ELECTRICAL SPECIFICATION (120V, 60 HZ)					
Max rated power (W)	1350W	1			
Pump pressure (bar)	15				
SIZE					
Overall dim - width	29 - 7/8"	758 mm			
Overall dim - height	18 - 3/4"	476 mm			
Overall dim - depth	18 - 3/4"	476 mm			
Cutout - width	22"	560 mm			
Cutout - height (min)	18 - 1/4"	450 mm			
Cutout - depth (min)	28 - 3/8"	722 mm			
INSTRUCTION FOR USE					
Use & Care Manual / Installation Manual	EN, SP, F	FR			

PROFESSIONAL GAS RANGE TOP

CODE ID	48" PROFESSIONAL RANGE TOP F6GRT486GS1				
Series and Finish	Professional Desig	n - Stainless Steel			
СООКТОР					
Туре	NG - Natural Gas / L	.P - Liquid Propane			
Cooking Surface	Black Er	ameled			
GAS COOKTOP FEATURES					
	Electric Re-ignition system	Dual Brass Crown Burners			
	Flame-out sensing	Flat Griddle			
	Top Mount Injectors	Pressure Regulator			
	L.P. Conversion Kit	Heavy Duty Cast Iron Grates			
Knob with minute minder		N			
COOKING ZONES	6+0	Ariddle			
Front Left					
Power (Max/ Min) - NG	20000 (BTU/h) - 5850W				
Power (Max/ Min) - LP	15000 (BTU/h) - 4400W	/ / 750 (BTU/h) - 220W			
Rear Left					
Power (Max/ Min) - NG	18000 (BTU/h) - 5300W	/ / 750 (BTU/h) - 220W			
Power (Max/ Min) - LP	15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W				
Central Middle "Left" GRIDDLE					
Power (Max) - NG	11500 (BTU/h) - 3370W				
Power (Max) - LP	11500 (BTU/h) - 3370W				
Front Middle					
Power (Max/ Min) - NG	18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W				
Power (Max/ Min) - LP	15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W				
Rear Middle	13000 (010/11) - 440000 / 730 (010/11) - 22000				
Power (Max/ Min) - NG	18000 (BTI I/b) - 5300M	(/ 750 (BTI 1/b) - 220W/			
Power (Max/ Min) - LP	18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W				
	15000 (B10/II) - 44000	7750 (BT0/II) - 22000			
Front Right	00000 (DTL//-)				
Power (Max/ Min) - NG	20000 (BTU/h) - 5850W				
Power (Max/ Min) - LP	15000 (BTU/h) - 4400W	7 / 750 (BTU/h) - 220W			
Rear Right					
Power (Max/ Min) - NG	18000 (BTU/h) - 5300W				
Power (Max/ Min) - LP	15000 (BTU/h) - 4400W	/ / 750 (BTU/h) - 220W			
DIMENSION / WEIGHT					
Overall dim - width	47 - 7/8"	1216 mm			
Overall dim - height	7"	179 mm			
Overall dim - depth	29 - 3/4"	756 mm			
POWER / RATINGS (208/240 V, 60 HZ)		A			
kW / Amps rating at 120-240V, 60Hz	3,2				
Cable + Plug INSTRUCTIONS FOR USE	Nema	0-10M			
	Frankler / Frank	ah / Caasiah			
Use & Care Manual / Installation Manual	English / Fren	cn / Spanish			



PROFESSIONAL GAS RANGE TOP





SOFIA

PROFESSIONAL INDUCTION RANGE TOP



CODE ID	36" PROFESSIONAL GAS RANGE TOP F6GRT366S1		30" PROFESSIONAL GAS RANGE TOP F6GRT304S1		
Series	6	00	60	00	
Finish	Professional Desi	gn - Stainless Steel	Professional Desig	n - Stainless Steel	
CONTROL PANEL					
Control Type	6 Heavy [Duty Knobs	4 Heavy D	uty Knobs	
СООКТОР					
Туре	GAS (N	IG or LP)	GAS (N	G or LP)	
Cooking Surface	Matte Bla	ick Enamel	Matte Bla	ck Enamel	
GAS COOKTOP FEATURES					
Electric Re-ignition system		•		•	
Flame-out sensing		•		•	
Top Mount Injectors		•		•	
Dual Crown Brass Burner		•		•	
Simmer Plate	Optional		Optional		
Wok Ring	Optional		Optional		
Heavy Duty Cast Iron Grates	3		2		
Cooking Zones	6		4		
Burners types	All Dual Flame	/Simmer Burner	All Dual Flame/Simmer Burner		
Power Front-L, Front-R (Max/Min) NG	20000 (BTU/h) - 5900	W / 750 (BTU/h) - 220W		-	
Power Front-R (Max/Min) NG		-	20000 (BTU/h) - 5900W / 750 (BTU/h) - 220W		
Power (Max/Min) NG	18000 (BTU/h) - 5300\	W / 750 (BTU/h) - 220W	18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W		
Power (Max/Min) LP	15000 (BTU/h) - 4400	W / 750 (BTU/h) - 220W	15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W		
DIMENSIONS/WEIGHT					
Overall dim - Width	35 - 3/4"	910 mm	29 - 3/4"	758 mm	
Overall dim - Height	7"	179 mm	7"	179 mm	
Overall dim - Depth	29 - 3/4"	756 mm	29 - 3/4"	756 mm	
Cut-out - Width	36"	914 mm	30"	762 mm	
Cut-out - Height (min)	7"	179 mm	7"	179 mm	
Cut-out - Depth (min - max)	24", 25 - 1/2"	610 mm)- 650 mm	24", 25 - 1/2"	610 mm - 650 mm	
Gross Weight	121 lbs	55 kg	100 lbs	45 kg	
POWER / RATINGS (120 V, 60 HZ)					
Amps	0.	.1A	0.	0.1A	
Power Cable	Nema	a 5-15P	Nema	5-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Frer	nch / Spanish	

CODE ID	36" PROFESSIONAL INDUCTION RANGE TOP F6IRT365S1				30" PROFESSIONAL INDUCTION RANGE TOP F6IRT304S1			
Series	600				600			
Finish	Professional Design - Ceramic and Stainless Steel				Professional Design - Ceramic and Stainless Steel			
CONTROL PANEL								
Control Type	6	Heavy [Duty Knobs		4 Heavy Duty Knobs			
COOKTOP								
Туре		CTION		INDUCTION				
Cooking Surface		ic Glass		Ceramic Glass				
INDUCTION COOKTOP FEATURES								
Pot Detection System			•		•			
Child Lock Function		•		•				
Failure Codes Indication	•				•			
Knob for Power Setting (illuminated)	•				•			
Power Levels	1 to 9				1 to 9			
Digital Display for Power Level	•				Optional			
Melting Function 113°F / 45°C	•				2			
Warming Function 158°F / 70°C	•				4			
Booster/Fast Boil Function for Each Zone	•			•				
Automatic Heat-up Time	•			•				
Residual Heat Indication	•				•			
Cooking Zones	5				4			
Burners types (Front-L/Front-R) - Power (Max/Booster)	Inductor 9"		(230 mm)	2300W / 3700W	Inductor	9"	(230 mm)	2300W / 3700W
Burners types (Rear-L/Rear R) - Power (Max/Booster)	Inductor 7"		(180 mm)	1850W / 3000W	Inductor	6 -1/2"	(165 mm)	1400W / 2200W
Burners types (Inner Middle) - Power (Max/Booster)	Inductor 7"		(180 mm)	1850W / 2600W	-	-	-	-
Burners types (Outer Middle) - Power (Max/Booster)	Inductor 11"		(280 mm)	3000W / 5500W	Inductor	7 - 3/4"	(200 mm)	1850W / 3000W
DIMENSIONS/WEIGHT				1				
Overall dim - Width	35 - 3/4"		910 mm			29 -3/4"	758 mm	
Overall dim - Height	7"		179 mm		7"		179 mm	
Overall dim - Depth	29 -3	/4"	756 mm			29 -3/4"	756 mm	
Cut-out - Width	36"		916 mm			30"	762 mm	
Cut-out - Height (min)	7"		179 mm			7"	179 mm	
Cut-out - Depth (min - max)	24", 25 - 3/8" 610 - 644 mm		ו ו	24", 25 - 1/2" 610 - 644mm			1	
Gross Weight	96 lbs 43		43.5 kg			79 lbs 36 kg		
POWER / RATINGS (120 V, 60 HZ)			. 0				. 0	
kW / Amps rating at 240V, 60Hz	10.80 kW - 45A				7.2 kW - 30A			
kW / Amps rating at 208V, 60Hz	9.80 kW - 47A				-			
Power Cable	Conduit			Conduit				
INSTRUCTIONS FOR USE								
Use & Care Manual / Installation Manual	English / French / Spanish				English / French / Spanish			





PROFESSIONAL PRO GAS COOK TOP



CODE ID	36" PROFESSIONAL PRO GAS COOK TOP F6PGK365S1					
Series	600					
Finish	Stainless Steel					
CONTROL PANEL						
Control Type	Knobs					
СООКТОР						
Туре	GAS (NG or LP)					
Cooking Surface	Matte Black Enamel					
GAS COOKTOP FEATURES						
Electric Re-ignition system	•					
Flame-out sensing	•					
Dual Crown Brass Burner	•					
Simmer Plate	Optional					
Small Pot Insert (for single burners only)	Optional					
Wok Ring (for dual burner only)	Optional					
Heavy Duty Cast Iron Grates	3					
Cooking Zones	5					
Brass Burners types	All Brass Dual Flame/Simmer Burner					
Power (Max/Min) (Front-L)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W					
Power (Max/Min) (Rear-L)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W					
Power (Max/Min) (Front Center)	20000 (BTU/h) - 5880W / 750 (BTU/h) - 220W					
Power (Max/Min) (Rear-R)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W					
Power (Max/Min) (Front-R)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W					
DIMENSIONS/WEIGHT						
Overall dim - Width	36" 914 mm					
Overall dim - Height	3 - 7/16" 87 mm					
Overall dim - Depth	21" 533 mm					
Cut-out - Width (min - max)	34 - 1/2" , 34 - 11/16" 876 mm - 881 mm					
Cut-out - Height (min)	3 - 3/8" 87 mm					
Cut-out - Depth (min - max)	19 - 9/16" , 19 - 3/4" 497 mm - 502 mm					
Gross Weight	73 lbs 33.2 kg					
POWER / RATINGS (120 V, 60 HZ)						
Amps	0.1A					
Max Power	80000 (BTU/h) - 23480W					
Power Cable	Nema 5-15P					
INSTRUCTIONS FOR USE						
Use & Care Manual / Installation Manual	English / French / Spanish					

SOFIA

PROFESSIONAL PRO GAS COOK TOP

CODE ID	30" PROFESSIONAL PRO GAS COOK TOP F6PGK305S1					
Series	600					
Finish	Stainless Steel					
CONTROL PANEL						
Control Type	Knobs					
COOKTOP						
Туре	GAS (NG or LP)					
Cooking Surface	Matte Black Enamel					
GAS COOKTOP FEATURES						
Electric Re-ignition system	•					
Flame-out sensing	•					
Dual Crown Brass Burner	•					
Simmer Plate	Optional					
Small Pot Insert (for single burners only)	Optional					
Wok Ring (for dual burner only)	Optional					
Heavy Duty Cast Iron Grates	2					
Cooking Zones	5					
Burners types	All Brass Dual Flame/Simmer Burner					
Power (Max/Min) (Front-L)	8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W					
Power (Max/Min) (Rear-L)	10500 (BTU/h) - 3080W / 2200 (BTU/h) - 645W					
Power (Max/Min) (Center)	20000 (BTU/h) - 5880W / 750 (BTU/h) - 220W					
Power (Max/Min) (Rear-R)	10500 (BTU/h) - 3080W / 2200 (BTU/h) - 645W					
Power (Max/Min) (Front-R)	8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W					
DIMENSIONS/WEIGHT						
Overall dim - Width	30"	762 mm				
Overall dim - Height	3 - 7/16"	87 mm				
Overall dim - Depth	21"	533 mm				
Cut-out - Width (min - max)	28" - 1/2 , 28" - 11/16	724 mm - 729 mm				
Cut-out - Height (min)	3 - 3/8"	87 mm				
Cut-out - Depth (min - max)	19" - 9/16 , 19" - 3/4	497 mm - 502 mm				
Gross Weight	61 lbs	27.5 kg				
POWER / RATINGS (120 V, 60 HZ)						
Amps	0.1A					
Max Power	57000 (BTU/h) - 16730W					
Power Cable	Nema 5-15P					
INSTRUCTIONS FOR USE						
Use & Care Manual / Installation Manual	English / French / Spanish					



ACCENTO

36" DUAL FUEL PROFESSIONAL RANGE



CODE ID	F4PDF366S1 - 36" DUAL FUEL PROFESSIONAL RANGE			
Series and Finish	400 Series - Professional Design - Stainless Steel			
CONTROL PANEL				
Control Type		Electronic		
Display: Clock - Temperature - Function		White LED		
СООКТОР				
Cooking Surface		Black Enameled		
Type GAS COOKTOP FEATURES		GAS (NG or LP)		
	Electric Flame Ignition and			
	Re-ignition Flame-out sensing	L.P. Conversion Kit Dual Crown Aluminum Burner	Top Mount Injectors	
Cooking Zones	Flame-out sensing	Dual Crown Aluminum Burner	Pressure Regulator	
Burners types		Dual Flame/Rapid Burners		
Power Front L+R (Max/Min) G20-5" (NG)	1800	0 (BTU/h) - 5300W / 750 (BTU/h) -	220W	
Power Rear L+R (Max/Min) G20-5" (NG)		0 (BTU/h) - 4400W / 2200 (BTU/h) -		
Power Front Middle (Max/Min) G20-5" (NG)		00 (BTU/h) - 4400W / 2200 (BTU/h) -		
Power Rear Middle (Max/Min) G20-5" (NG)		0 (BTU/h) - 5300W / 750 (BTU/h) -		
Power Front L+R (Max/Min) G31-10" (LP)		0 (BTU/h) - 4400W / 750 (BTU/h) -		
Power Rear L+R (Max/Min) G31 - 10" (LP) Power Front Middle (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3500W / 2200 (BTU/h) - 0 (BTU/h) - 3800W / 2200 (BTU/h) -		
Power Front Middle (Max/Min) G31 - 10" (LP) Power Rear Middle (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3800W / 2200 (BTU/h) - 0 (BTU/h) - 4400W / 750 (BTU/h) -		
OVEN	1300	Electric Pyro	22000	
Oven Type	N	Iultifunction 2 Fans (True Euro Conv	.)	
Temperature Regulation		Electronic		
OVEN FUNCTIONS		-	-	
	Pyrolytic Self-Clean with automatic door latch	Pizza (Lower Convection)	Proof (Warm)	
	True European Convection Bake (Multi level)	Bake	Broil	
	Dehydrate	Thaw (Defrost)	Convection Broil	
	Convection Roast	Oven Lights	Keep warm (Warm Plus)	
	Fast Preheat			
ELECTRIC OVEN FEATURES				
	Preset/Last Used	Preheat bar	Automatic Fast Preheat	
	Temperature Memory	(25%, 50%, 75%, 100%)		
	Child Door Lock °F Degree unit	Sabbath Mode	Hour Clock Formats AM/PM	
OVEN DOOR(S)				
Oven Glass Window		Deep Embossed Window		
Door Cooling System	4 Pane Heat Resistant Glasses			
Door Hinges		Heavy Duty Steady Tilt		
Handle Style	Stainle	ess Steel Tube d30mm with Metal ter	rminals	
OVEN CAVITY				
Net Capacity (cbft) Cavity Enamel Color		5.7 Black		
Rack Positions	6			
Oven Lights	3x20W Halogen			
HEATING ELEMENTS (@240V)				
Broil Upper Heating Element		3500 W		
Upper Auxiliary Element Wattage	1032 W			
Concealed Bake Lower Heating Element	3000 W			
Convection Element OVEN ACCESSORIES		2 x 1300 W		
Chrome Racks		2		
Enameled Grill set (basin + anti splash)	2			
Telescopic Chrome Rack	Only as optional ACCESSORY			
Meat Probe	Only as optional ACCESSORY			
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 3/		10 mm	
Overall dim - Height (min - max)		/8", 37 - 1/4" 898 mm - 9		
Overall dim - Depth	29 - 3/	/4″ / 7	56 mm	
POWER / RATINGS (208/240 V, 60 HZ) kW / Amps rating at 120-240V, 60Hz		3.84 kW/ 16.0 A		
kW / Amps rating at 120-240V, 60Hz kW / Amps rating at 120-208V, 60Hz	3.84 kW - 16.9 A			
Power Cable	3.54 kW - 17.5 A Nema 14-50P			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual		English / French / Spanish		
		v		

ACCENTO

30" DUAL FUEL PROFESSIONAL RANGE

CODE ID	F4PDF304S1 - 30" DUAL FUEL PROFESSIONAL RANGE				
Series and Finish	400 Series - Professional Design - Stainless Steel				
CONTROL PANEL					
Control Type	6 Heavy Duty Knobs				
Display: Clock - Temperature - Function	White LED				
COOKTOP					
Cooking Surface Type		Black Enameled GAS (NG or LP)			
		GAS (NG OF LF)			
	Electric Flame Ignition and Re-ignition	L.P. Conversion Kit	Top Mount Injectors		
	Flame-out sensing	Dual Crown Aluminum Burner	Pressure Regulator		
Cooking Zones		4			
Burners Type		Rapid Burner			
Power Front-L, Rear-R (Max/Min) G20-5" (NG) Power Rear-L, Front-R (Max/Min) G20-5" (NG)		(BTU/h) - 4400W / 2200 (BTU/h) - 6 (BTU/h) - 5300W / 750 (BTU/h) - 2			
Power Rear-L, Pront-R (Max/Min) G20-5 (NG) Power Front-L, Rear-R (Max/Min) G31-10" (LP)		(BTU/h) - 3500W / 2200 (BTU/h) - 6			
Power Rear-L, Front-R (Max/Min) G31 - 10" (LP)		(BTU/h) - 4400W / 750 (BTU/h) - 2			
OVEN		Electric Pyro			
Туре		Multifunction 2 Fans			
Temperature Regulation		Electronic			
OVEN FUNCTIONS					
	Pyrolytic Self-Clean with automatic door latch True European Convection	Pizza (Lower Convection)	Proof (Warm)		
	Bake (Multilevel)	Bake	Broil		
	Dehydrate	Thaw (Defrost)	Convection Broil		
ELECTRIC OVEN FEATURES	Convection Roast	Oven Lights	Keep warm (Warm Plus)		
	Preset/Last Used Temperature Memory	Preheat Indicator (25%, 50%, 75%, 100%)	Automatic Fast Preheat		
	Child Door Lock	Sabbath Mode	Hour Clock Formats AM / PM		
	°F Degree unit	Cabbatti Mode			
OVEN DOOR(S)					
Oven Glass Window		Deep Embossed Window			
Door Cooling System		4 Pane Heat Resistant Glasses			
Door Hinges	01.11	Heavy Duty Steady Tilt			
Handle Style OVEN CAVITY	Stainie	ess Steel Tube d30mm with Metal ter	minais		
Net Capacity (cbft)		4.4			
Cavity Enamel Color		Black			
Rack Positions		6			
Oven Lights		3x20W Halogen			
HEATING ELEMENTS (@240V)					
Broil Upper Heating Element Upper Auxiliary Element Wattage		3500 W (240V)			
Concealed Bake Lower Heating Element		1032 W (240V) 3000 W (240V)			
Convection Element		2 x 1300 W (240V)			
OVEN ACCESSORIES		2 / 1000 10 (2101)			
Chrome Racks		2 rack without frontal bend			
Enameled Grill set (basin + anti splash)		1			
Telescopic Chrome Rack		Only as optional ACCESSORY			
		Only as optional ACCESSORY			
DIMENSIONS/WEIGHT (In or Lbs) Overall dim - Width	29 - 3/	// 33 72	59 mm		
Overall dim - Width Overall dim - Height (min - max)	29 - 3/ 39"		58 mm 93 mm		
Overall dim - Depth	29 - 3/		56 mm		
POWER / RATINGS (208/240 V, 60 HZ)	20 0				
kW / Amps rating at 120-240V, 60Hz		3.84 kW - 16.9Amps			
kW / Amps rating at 120-208V, 60Hz	3.54 kW - 17.5Amps				
Power Cable	Nema 14-50P				
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual		English / French / Spanish			



ACCENTO

36" ALL GAS PROFESSIONAL RANGE



CODE ID	F4PGR366S2 - 36" ALL GAS PROFESSIONAL RANGE			
Series and Finish	400 Series - Professional Design - Stainless Steel			
CONTROL PANEL	400 36	enes - i Tolessional Design - Stainles	3 01661	
Control Type	Valve			
Clock Display		•		
COOKTOP				
Cooking Surface		Matte Black Enameled		
Туре		GAS (NG or LP)		
GAS COOKTOP FEATURES		× , , , , , , , , , , , , , , , , , , ,		
	Electric Flame and Re-ignition	Top Mount Injectors	Dual Crown Aluminum Burner	
	Flame-out sensing	L.P. Conversion Kit	Pressure Regulator	
Heavy Duty Cast Iron Grates		3		
Cooking Zones		6		
Burners types		Dual Flame/Rapid Burners		
Power Front L+R (Max/Min) G20 - 5" (NG)		0 (BTU/h) - 5300W / 750 (BTU/h) -		
Power Rear L+R (Max/Min) G20 - 5" (NG)		0 (BTU/h) - 4400W / 2200 (BTU/h) ·		
Power Front Middle (Max/Min) G20 - 5" (NG)		0 (BTU/h) - 4400W / 2200 (BTU/h) ·		
Power Rear Middle (Max/Min) G20 - 5" (NG)		0 (BTU/h) - 5300W / 750 (BTU/h) ·		
Power Front L+R (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 4400W / 750 (BTU/h) -		
Power Rear L+R (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3500W / 2200 (BTU/h) ·		
Power Front Middle (Max/Min) G31 - 10" (LP)		0 (BTU/h) - 3500W / 2200 (BTU/h) -		
Power Rear Middle (Max/Min) G31 - 10" (LP)	1500	0 (BTU/h) - 4400W / 750 (BTU/h) -	- 220W	
OVEN				
Туре	r	Multifunction 2 Fans (True Euro Conv	.)	
Temperature Regulation		Thermostat		
		T-Zero		
OVEN FUNCTIONS	Down Bake	Broil		
GAS OVEN FEATURES	Down Bake	Broli		
GAS OVEN FEATORES	Electronic Flame Ignition	Gas safety devices	L.P. Conversion Kit	
	Flame-out Sensing		E.I. Conversion Rit	
OVEN DOOR(S)	Thame-out Genaing			
Oven Glass Window		Deep Embossed Window		
Door Cooling System		4 Pane Heat Resistant Glasses		
Door Hinges		Heavy Duty Steady Tilt		
Handle Style	Staj	nless Steel Tube d30mm, Metal term	inals	
OVEN CAVITY				
Gross Capacity (cbft)		5.7		
Cavity Enamel Color		Black		
Rack Positions		6		
Oven Lights		3x20W Halogen		
BOTTOM BURNER				
Power (Max) G20 - 5"	21500 (BTU/h) - 6300W			
Power (Max) G31 - 10"	21500 (BTU/h) - 6300W			
GRILL BURNER				
Power (Max) NG	18000 (BTU/h) - 5300W			
Power (Max) LP	17000 (BTU/h) - 5000W			
OVEN ACCESSORIES				
Chrome Racks	2 racks without frontal bend			
Enameled Grill set (basin + anti splash)	1			
Telescopic Chrome Rack	only as optional ACCESSORY			
DIMENSIONS/WEIGHT				
Overall dim - Width	29 - 3/4" 758 mm			
Overall dim - Height (min - max)		/8", 37 - 1/4" 898 mm - 9		
Overall dim - Depth	29 - 3/	/4" 7	56 mm	
POWER / RATINGS (120 V, 60 HZ)		00011/ 51		
KW/Amps rating rating at 120V, 60Hz		600W - 5A		
Cable + Plug		Nema 5-15P		
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual		English / French / Spanish		

ACCENTO

30" ALL GAS PROFESSIONAL RANGE

CODE ID	F4PG
Series and Finish	40
CONTROL PANEL	
Control Type	
Commands	
COOKTOP	
Cooking Surface	
Туре	
GAS COOKTOP FEATURES	
	Electric Flame and Re-ignition
	Flame-out sensing
Heavy Duty Cast Iron Grates	
Cooking Zones	
Burners types	
Power Front-L,Rear-R (Max/Min) G20-5" (NG)
Power Rear-L, Front-R (Max/Min) G20-5" (NG	
Power Front-L,Rear-R (Max/Min) G31 - 10" (LP)	1
Power Rear-L, Front-R (Max/Min) G31 - 10" (LP)	
OVEN	
Туре	
Temperature Regulation	
Injection Oven	
OVEN FUNCTIONS	
	Down Bake
GAS OVEN FEATURES	
	Electronic Flame Ignition
	Flame-out Sensing
OVEN DOOR(S)	
Oven Glass Window	
Door Cooling System	
Door Hinges	
Handle Style	St
OVEN CAVITY	
Gross Capacity (cbft)	
Cavity Enamel Color	
Rack Positions	
Oven Lights	
BOTTOM BURNER	
Power (Max) G20 - 5"	
Power (Max) G31 - 10"	
GRILL BURNER	
Power (Max) NG Power (Max) LP	
OVEN ACCESSORIES Chrome Racks	
Enameled Grill set (basin + anti splash)	
Telescopic Chrome Rack	
Meat probe	-
DIMENSIONS/WEIGHT	
Overall dim - Width	29
Overall dim - Height (min - max)	39
Overall dim - Depth	29
POWER / RATINGS (120 V, 60 HZ)	
KW/Amps rating rating at 120V, 60Hz	
KW/Amps rating rating at 120V, 60Hz Cable + Plug	
KW/Amps rating rating at 120V, 60Hz	



GR304S2 - 30" ALL GAS PROFESSIONAL RANGE					
00 Se	ries - Professional	Design - Stainless	s Steel		
	1/-1				
	Val 2 Kr				
	2 10	003			
	Matte Black	Enameled			
	GAS (NO	G or LP)			
on	Top Moun	t Injectors	Dual Crown Aluminum Burner		
	L.P. Conv	ersion Kit	Pressure Regulator		
	2				
	4				
1500	Dual Flame/R		NAENNI		
12000	0 (BTU/h) - 4400W 0 (BTU/h) - 5300W	/ 2200 (BTU/n) - 6	045VV 220W/		
12000	0 (BTU/h) - 3500W	/ / 730 (BTU/h) - 2	250V		
	0 (BTU/h) - 4400W				
10000	0 (D10/11) 44000		2011		
Ν	Jultifunction 2 Fan	s (True Euro Conv.)		
	Therm		, 		
	T-Z	ero			
	Br	oil			
	0 ()	1.1			
	Gas safet	y devices	L.P. Conversion Kit		
	Deen Embos	sed Window			
	4 Pane Heat Re				
	Heavy Duty				
tainle	ss Steel Tube d30		minals		
	4.				
	Bla				
	0.000//				
	3x20W I	halogen			
	18000 (BTU	/h) - 5300W			
	16000 (BTU				
		,			
	14000 (BTU	/h) - 4102W			
	13000 (BTU	/h) - 3800W			
	0 1 11	6 1 1 1			
	2rack without frontal bend				
	only as optional ACCESSORY				
	only as optional ACCESSORY				
9 - 3/	4"	75	58 mm		
9"		99	93 mm		
9 - 3/	4"	75	56 mm		
	600W - 5A				
	Nema 5-15P				
	English /E	ab / Onerist			
	English / Frer	icii / spanisn			

SOFIA

PROFESSIONAL HOOD





CODE ID	48" PROFESSIONAL HOOD F6PH48DS1			ESSIONAL HOOD PH36DS1
Series	6	00		600
Finish	Professional Desig	gn - Stainless Steel	Professional De	esign - Stainless Steel
CONTROL PANEL				
Control Type	4 speed mech	nanical control	4 speed m	echanical control
PERFORMANCES				
Output (CFM)	10	000		1000
Sound Level (dB)	7	75		75
Motor	Twin	Motor	Tv	vin Motor
Venting Type	Ducted and	recirculating	Ducted a	nd recirculating
FEATURES				
Filter Style	Pro Baffle		P	ro Baffle
Lighting	6 x 1.2	W LED	4 x	1.2W LED
Single duct diameter	7 - 7/8"	200 mm	7 - 7/8"	200 mm
DIMENSIONS/WEIGHT				
Overall dim - Width	47 - 7/8"	1216 mm	35 - 7/8"	910 mm
Overall dim - Height	18"	460 mm	18"	460 mm
Overall dim - Depth	24"	610 mm	24"	610 mm
Gross Weight	90 lbs	41 kg	70 lbs	30 kg
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	540W - 4.70A		540	W - 4.70A
Power Cable	Nema 5-15P		Ne	ma 5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Free	nch / Spanish	English /	French / Spanish

SOFIA

PROFESSIONAL HOOD

CODE ID		MNEY HOOD 48DS1	F6PC36DS1 - 36" PF	RO CHIMNEY HOOD
Series and Finish	Professional Desig	gn - Stainless Steel	Professional Desig	n - Stainless Steel
CONTROL PANEL				
Control Type	3 Contro	ol Knobs	3 Contro	ol Knobs
PERFORMANCES				
Output (CFM)	10	000	10	00
Sound Level (dB)	7	5	7	5
Motor	Twin	Motor	Twin	Votor
FEATURES				
Filter Style	Pro E	Baffle	Pro Baffle	
Lighting	6 x 1.2	W LED	4 x 1.2W LED	
Duct dimension (width x depth)	18" x 12"	457 x 305 mm	18" x 12"	457 x 305 mm
DIMENSIONS/WEIGHT				
Overall dim - Width	48'	1219 mm	36'	914 mm
Overall dim - Height	40-13/16"	1037 mm	40-13/16"	1037 mm
Overall dim - Depth	24"	610 mm	24"	610 mm
Gross Weight	100 lbs	45 kg	86 lbs	39 kg
POWER / RATINGS (120 V, 60 HZ)				
Watts	540W		54	W
Power Cable	Nema 5-15P		Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Frei	nch / Spanish	English / Frer	nch / Spanish

NFW


SOFIA

PROFESSIONAL HOOD





CODE ID	36" PROFESSIONAL HOOD F6PH36S1			SIONAL HOOD - F6PH30S2
Series	60	00	6	00
Finish	Professional Desig	n - Stainless Steel	Professional Desig	gn - Stainless Steel
CONTROL PANEL				
Control Type	4 speed mech	nanical control		hanical control ol (F6PH30S2)
PERFORMANCES				
Output (CFM)	60	00	6	00
Sound Level (dB)	7	2	1	72
Motor	-	ne	-	ne
Venting Type	Ducted and	recirculating	Ducted and	recirculating
FEATURES				
Filter Style	Pro Baffle			Baffle
Lighting	2 x 1.2W LED		2 x 1.2W LED 4 x 1.2W LED (F6PH30S2)	
Duct diameter	5 - 15/16"	150 mm	5 - 15/16"	(150 mm)
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 7/8"	910 mm	29 - 13/16"	760 mm
Overall dim - Height	18"	460 mm	18"	460 mm
Overall dim - Depth	24"	610 mm	24"	610 mm
Gross Weight	70 lbs	30 kg	61 lbs	28 kg
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	430W - 3.8A		430W	- 3.8A
Power Cable	Nema 5-15P		Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish	English / Fre	nch / Spanish



CODE ID	48" PROFESSION F6BP4		36" PROFESSIONA F6BP34		
Series	60	0	600)	
Finish	Stainles	s Steel	Stainless	Steel	
CONTROL PANEL					
Control Type	3 knobs +4 speed r	nechanical control	3 knobs +4 speed m	echanical control	
PERFORMANCES					
Output (CFM)	100	00	100	0	
Sound Level (dB)	75	5	75		
Motor	Dual N	lotor	Dual M	otor	
Venting Type	Duc	ted	Ducte	Ducted	
FEATURES					
Filter Style	Pro B	affle	Pro Baffle		
Lighting	6 x 1.2\	V LED	4 x 1.2W LED		
Duct diameter for each motor	8"	203.2 mm	8"	203.2 mm	
DIMENSIONS/WEIGHT					
Overall dim - Width	45 - 3/4"	116 mm	34 - 1/4"	87 mm	
Overall dim - Height	13 - 1/8"	33 mm	13 - 1/8"	33 mm	
Overall dim - Depth	18 - 1/2"	47 mm	18 - 1/2"	47 mm	
Cut-out (w x d)	43 - 7/16" x 16 - 1/2"	1092 x 419 mm	32 - 1/16" x 16 - 1/2"	814 x 419 mm	
Gross Weight	68 lbs	31 kg	60 lbs	27 kg	
Net Weight	57 lbs	26 kg	51 lbs	23 kg	
POWER / RATINGS (115 V, 60 HZ)					
Watts / Amps	540W - 4.70A		540W - 4	4.70A	
Power Cable	Nema	5-15P	Nema 5	-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / French / Spanish		English / Frenc	h / Spanish	





SOFIA

PROFESSIONAL FRIDGE BUILT-IN FRIDGE



CODE ID	36" PROFESSIONAL FRIDGE F7PBM36S1-L (LEFT HINGE) F7PBM36S1-R (RIGHT HINGE)		F7IBM36O1-L	IN FRIDGE (LEFT HINGE) (RIGHT HINGE)	
Series	70	00	70	00	
Finish	Professional Desig	n - Stainless Steel	Professional Desig	gn - Overlay Panel	
PERFORMANCES/CAPACITY		·		<u> </u>	
Anual Energy Usage	\$69 (57	'1 kWh)	\$70 (58	30 kWh)	
Noise Level db		0	4	.0	
Fridge compartment capacity (cbft)	14	1.7	14	1.7	
Flexzone Bottom-Drawer capacity (cbft)	3	.8	3	.8	
FEATURES					
Fridge Compartment					
Glass Shelves	1	2		2	
Adjustable Door Shelves		3		3	
Micro shot-peened Stainless Steel Drawers	2 Low	Temp	2 Low	Temp	
Flexzone Bottom-Drawer					
White Painted Drawers		1		1	
Internal Drawers	1+1i	ce tray	1 + 1 ice tray		
LED lighting		•	•		
Ice Maker	•			•	
Equipment					
No Frost	•			•	
Flexzone		•		•	
TruPivot hinges	•			•	
DIMENSIONS/WEIGHT					
Width in	35 - 3/8"	900 mm	35 - 3/8"	900 mm	
Height in	83 - 1/2"	2121 mm	83 - 1/2"	2121 mm	
Depth without handle in	25"	635 mm	24"	610 mm	
Minimum niche height in	84"	2134 mm	84"	2134 mm	
Door clearance in	57 - 7/8"	1470 mm	57 - 7/8"	1470 mm	
Door opening angle	105°		105°		
Net Weight	540 lbs (245 kg)		474 lbs	(215 kg)	
POWER / RATINGS (115 V, 60 HZ)					
Watts / Amps		- 4.8A		552W - 4.8A	
Power Cable	Nema	5-15P	Nema	5-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish	English / Frer	nch / Spanish	

SOFIA

PROFESSIONAL WINE CELLAR BUILT-IN WINE CELLAR



CODE ID	F7PBW24S1-L	IAL WINE CELLAR - (LEFT HINGE) (RIGHT HINGE)	F7IBW2401-L	WINE CELLAR . (LEFT HINGE) (RIGHT HINGE)	
Series	7	00	7	00	
Finish	Professional Desig	gn - Stainless Steel	Professional Desi	ign - Overlay Panel	
PERFORMANCES/CAPACITY		<u> </u>		<u> </u>	
Noise Level db	4	41		41	
Riserva Compartment capacity (bottles)	3	36		36	
Wine Cellar Compartment capacity (bottles)	1	18		18	
Flexzone Bottom-Drawer capacity (cbft)		2		2	
FEATURES					
Riserva storage compartment					
Natural wood shelves		6		6	
Wine Cellar Compartment					
Natural wood shelves		3		3	
Flexzone Bottom-Drawer					
White Painted Drawers		1		1	
Internal Drawers		1	1		
LED lighting		•		•	
Glass door		•		•	
Equipment					
TriplePlay Refrigeration	•			•	
No Frost		•		•	
Flexzone		•		•	
TruPivot hinges		•		•	
DIMENSIONS/WEIGHT					
Width in	23 - 5/8"	600 mm	23 - 5/8"	600 mm	
Height in	83 - 1/2"	2121 mm	83 - 1/2"	2121 mm	
Depth without handle in	25"	635 mm	24"	610 mm	
Minimum niche height in	84"	2134 mm	84"	2134 mm	
Door clearance in	46"	1168 mm	46"	1168 mm	
Door opening angle	105°		105°		
Net Weight	463 lbs 210 kg		386 lbs	175 kg	
POWER / RATINGS (115 V, 60 HZ)				~ ~	
Watts / Amps	472W	/ - 4.1A	472W	/ - 4.1A	
Power Cable	Nema 5-15P		Nema	Nema 5-15P	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Fre	nch / Spanish	



FRIDGE

FRENCH DOOR FRIDGE



CODE ID	36" FRENCH DOOR + PROFESSIONAL HANDLE KIT F6FBM36S2 + F6HK36FFBS
Finish	Stainless Steel
CONTROLS	
Cooling System	Duo Frost Free Cooling
Control system	Electronic System
CAPACITIES	
Total Net Volume, cu. ft.	19.86
Fresh Food Net Volume, cu. ft.	13.3
Freezer Net Volume, cu. ft.	6.56
FRIDGE FEATURES	
IonFresh	•
Carbon Filter	•
Interior Filtered Water Dispenser	•
Electronic Control Display Type	Hidden Digital Display on Front Top Trim
Auto Defrost	•
Inner Illumination	Side Walls, Ceiling and Fresh Food Compartment
Shelves	4 Safety Glass
Crispers	2
Door Racks	6
Compressor	Variable Speed VCC
Large Pantry Drawer	•
Fan Ventilation	•
FREEZER FEATURES	
Automatic Ice Maker	•
Auto Defrost	•
Interior LED Lighting	Ceiling
TECHNICAL FEATURES	
Supply Voltage, V/Hz	120V / 60Hz
Rated Current, A	2.2A
Noise Level, dBA	44
DIMENSIONS	
H x W x D, in.	69 - 3/4" x 35 - 3/4" x 26 - 13/16"
H x W x D, cm	177.1 x 90.8 x 68
Product Weight, lbs.	289 lbs
Product Weight, kg	135 Kg
PERFORMANCE	
Energy Star Qualified	•
Climatic Class	Т
Annual Energy Consumption, wh/year	566
Cooling Gas	R600
INSTRUCTIONS FOR USE	
Use & Care Manual / Installation Manual	English / French / Spanish

DISHWASHER

DISHWASHER

CODE ID	24" STAINLESS STEEL BUILT-IN DISHWASHER + PROFESSIONAL HANDLE KIT F6DWT24SS2 + F6UHK24DISH		
Finish	Stainless steel		
PERFORMANCES			
Position	Top of door		
Туре	Electronic		
DISPLAY			
Rinse Aid Indicator	LED Icon		
LED Spot	Floor Illuminating Led Spotlight		
MAIN FEATURES			
Loading Capacity (Place settings)	16		
Tub Material	Stainless Steel		
Inner Door Material	Stainless Steel		
Overflow Protection	•		
5 Level Wash	•		
Delay Timer	1 -24 Hours		
3-way Euro Filter	•		
Drying Fan Assisted	Fan Assisted Condensation		
Brushless DC [™] Motor	•		
Turbidity Sensor	•		
Silent Operation	45 dB(A)		
Interior High Loop with Air Gap	•		
Self Clean Cycle	•		
FUNCTION			
Half Load Function	•		
Sanitize Function	•		
RapidClean	•		
ExtraRinse	•		
PROGRAMS			
Number of Programs	6		
Pots and Pans+ (167° F rinse temp.)	•		
MixWash+ (142 - 145° F rinse temp.)	•		
Regular Wash (142 - 145° F rinse temp.)	•		
Daily Wash	•		
Quick Wash (131° F)	•		
Rinse & Hold	•		
TECHNICAL FEATURES			
Permissible Water Pressure	4.35 - 145 psi (0.3 - 10 bars)		
Electrical Connection	120 V, 12 A, 60Hz		
Total Power	1400 W (watts)		
Heater Power	1100 W (watts)		
RACK SYSTEM			
Cutlery Basket	Sliding		
Upper Rack (Inset Shelves)	2		
Adjustable Upper Rack	Able to raise/lower the rack when fully loaded		
3rd Rack	Full-width		
ENVIRONMENTAL			
ENERGY STAR® Qualified	•		
Energy Consumption, Wh/year	255		
Water Consumption gal/cycle	3.5 - 5.0		
RoHS compliant (Lead Free)	•		
DIMENSION/WEIGHT			
H x W x D, in.	33 - 7/8" x 23 - 9/16" x 22 - 1/2"		
H x W x D, cm	86.1 x 59.8 x 57		
Product Weights, Ibs	154 lbs		
Product Weights, kg	70 kg		
INSTRUCTIONS FOR USE	×		





TECHNICAL DISTINTO

296 FULGOR MILANO

FULGOR MILANO 297

TOUCH CONTROL OVEN







DISTINTO

TOUCH CONTROL OVEN



CODE ID	30" TOUCH CONTROL SINGLE OVEN F7SP30			
	F7S	P30		
Series	700			
	S2 - Stainless Steel			
Finish		- Black Glass - White Glass		
CONTROL PANEL				
Control Type	Creactive Electro	nic Touch Control		
Display: Clock - Temperature - Function		3.5"		
_anguage	English (USA) / English (UK) / Fr Control Interface	ench / Spanish / Italian / German Chime Volume Setting		
	Full Touch: Functions -	y		
	Recipes - Settings Menu	Date Format		
	Brightness Setting	Demo Mode		
OVEN				
		Convection		
Temperature Regulation OVEN FUNCTIONS	Electronic Control (MIN/ff	nax 170/550°F - 75/290°C)		
	Pyrolytic Self-Clean	Broil		
	True Convection	Dehydrate		
	Convection Broil	Thaw (Defrost)		
	Convection Roast	Proof (Warm)		
	Pizza (Lower Convection) Bake	Keep warm (Warm Plus) Oven Lights		
ELECTRIC OVEN FEATURES	Dake	Oven Lights		
	Preset default temperature	Display instantaneous temperature		
	Child Door Lock	Control Display Lock		
	Sabbath Mode	12/24 Hour Clock Formats		
	Automatic Fast Preheat Meat Probe	Temperature Display °C/°F Event Logs (for Service)		
OVEN DOOR(S)	Weat FIDDE	Event Logs (for Service)		
Dven Glass Window	Large See T	hrough Glass		
Door Cooling System		stant Glasses		
Door Hinges	Heavy Dut	y Steady Tilt		
DVEN CAVITY Gross Capacity (cbft)	Λ	.4		
Jsable Capacity (cbft)				
Cavity Enamel Color	Black			
Rack Positions		6		
	3x20W	Halogen		
IEATING ELEMENTS (@240V) Broil Upper Heating Element	0	500 W		
Jpper Auxiliary Element		032 W		
Concealed Bake Lower Heating Element		000 W		
Convection Element	2 x 1	300 W		
OVEN ACCESSORIES		0		
Chrome Racks Enameled Broiler Pan (basin + anti splash)		2		
Felescopic Chrome Rack		1		
DIMENSIONS/WEIGHT				
Overall dim - Width	29 - 11/16"	754 mm		
Overall dim - Height	27 - 7/8"	707 mm		
Dverall dim - Depth Cut-out - Width	24"	610 mm 722 mm		
Cut-out - Width Cut-out - Height (min)	<u>28 - 7/16"</u> 27 - 3/8"	695 mm		
Cut-out - Depth (min)	23 - 1/4"	590 mm		
Gross Weight	183 lbs	83 kg		
POWER / RATINGS (208/240 V, 60 HZ)				
	3.70kW - 15.4A			
xW / Amps rating at 120-240V, 60Hz	0.5011	3.50kW - 16.8A		
kW / Amps rating at 120-208V, 60Hz				
		/ - 16.8A nduit		

CODE ID	30" TOUCH CONTROL DOUBLE OVEN F7DP30		
Series	700		
	S1 -	Stainless Steel	
Finish		Black Glass	
	W1 -	White Glass	
CONTROL PANEL			
Control Type		nic Touch Control	
Display: Clock - Temperature - Function	TFT		
Language	English (USA) / English (UK) / Fre		
	Control Interface	Chime Volume Setting	
	Full Touch: Functions -	Date Format	
	Recipes - Settings Menu	Dama Mada	
	Brightness Setting	Demo Mode	
OVEN Trace	Dual True (Convection	
Type Temperature Regulation	Electronic Control (min/m		
OVEN FUNCTIONS	Electronic Control (Min/M	ax 110/000 F = 10/290 Oj	
OVENTONOTIONS	Pyrolytic Self-Clean	Broil	
	True Convection	Dehydrate	
	Convection Broil	Thaw (Defrost)	
	Convection Bron	Proof (Warm)	
	Pizza (Lower Convection)	Keep warm (Warm Plus)	
	Bake	Oven Lights	
ELECTRIC OVEN FEATURES	Build		
	Preset default temperature	Display instantaneous temperature	
	Child Door Lock	Control Display Lock	
	Sabbath Mode	12/24 Hour Clock Formats	
	Automatic Fast Preheat	Temperature Display °C/°F	
	Meat Probe (Upper Oven Only)	Event Logs (for Service)	
OVEN DOOR(S)		• • · · /	
Oven Glass Window	Large See Th	nrough Glass	
Door Cooling System	4 Heat Resis	tant Glasses	
Door Hinges	Heavy Duty	Steady Tilt	
OVEN CAVITY			
Gross Capacity (cbft)	4.		
Usable Capacity (cbft)	4.		
Cavity Enamel Color		ick	
Rack Positions	6		
Oven Lights	3x20W	Halogen	
HEATING ELEMENTS (@240V)			
Broil Upper Heating Element		500 W	
Upper Auxiliary Element		032 W	
Concealed Bake Lower Heating Element		000 W	
Convection Element	2 x 13		
OVEN ACCESSORIES			
Chrome Racks	2		
Enameled Broiler Pan (basin + anti splash) Telescopic Chrome Rack	1		
DIMENSIONS/WEIGHT			
Overall dim - Width	29 - 11/16"	754 mm	
Overall dim - Width Overall dim - Height	<u>29 - 11/16</u> 50 - 13/16"	1290 mm	
Overall dim - Depth	24"	610 mm	
Cut-out - Width	28 - 7/16"	722 mm	
Cut-out - Height (min)	50"	1270 mm	
Cut-out - Depth (min)	23 - 1/4"	590 mm	
Gross Weight	326 lbs	148 kg	
POWER / RATINGS (208/240 V, 60 HZ)	020103		
kW / Amps rating at 120-240V, 60Hz	7.50kW	- 31 2A	
kW / Amps rating at 120-2400, 60Hz	6.30kW		
Power Cable		duit	
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / From	nch / Spanish	





TECHNICAL DATA

COMBI SPEED OVEN





DISTINTO

COMBI STEAM OVEN



CODE ID		SPEED OVEN PD30S1		SPEED OVEN PD24S1
Туре	Microwave -	Speed Oven	Microwave	- Speed Oven
Finish	Stainle	ess steel	Stainle	ess steel
Temperature Regulation	Elec	tronic	Elec	stronic
FUNCTIONS				
Microwave	•			•
Convection roast		•		•
Convection broil		•		•
Broil		•		•
Recipes				•
Oven Lights		•		•
CONTROL PANEL		•		•
Control type		yboard - Electronic		eyboard - Electronic
Display		3.5"		3.5"
Menu Recipes		•		•
Language	· · · · · · · · · · · · · · · · · · ·	4		4
SPECIAL FEATURES				
12/24 hour clock format		•	•	
°C/°F		•	•	
OVEN DOOR(S)				
Cool door		•	•	
OVEN CPACITY				
Gross Capacity (cuft)	1.2		1	.2
Usable Capacity (cuft)	1.0		1	.0
Cavity Enamel Color	Stainle	ss Steel	Stainle	ss Steel
Rack Positions	3			3
Oven Lights		Halogen		Halogen
Broil Upper Heating Element		/ (240V)	1500W (240V)	
Convection Element Wattage	2300W	/ (240V)	2300W (240V)	
ACCESSORIES		4		4
Chrome racks		•		•
Stainless Steel Tray		•		•
Overall dim - width	29 - 7/8"	758 mm	23 - 3/8"	594 mm
Overall dim - height	18 - 5/8"	473 mm	17 - 3/4"	452 mm
Overall dim - depth	21"	533 mm	21 - 1/2"	546 mm
Recess (LxHxP) in/mm	(25 - 3/4" x 18" x 22")	(654 x 458 x 560 mm)	(23 - 3/8" x 18" x 22")	(560 x 458 x 560 mm)
POWER / RATINGS	(((00000000000000000000000000000000000000
KW/Amps rating at 240V, 60Hz	3.4kW - 14A		3.4kW - 14A	
KW/Amps rating at 208V, 60Hz	2.7kW - 13A		2.7kW - 13A	
Microwave input power	1850 W		1850 W	
Microwave output power	900 W		900 W	
Frequency		MHz) MHz
Cable + Conduit		•		•
INSTRUCTION FOR USE				
Use & Care Manual / Installation Manual	EN, S	SP, FR	EN, \$	SP, FR

CODE ID	30" COMBI S F7DSC		24" COMBI S F7SC0	
Series	700		700	
Finish	Stainles	ss Steel	Stainles	ss Steel
CONTROL PANEL				
Programming	MODULAR	- Electronic	MODULAR	- Electronic
Control Type	Dual Full Tou	ch Keyboard	Single Full To	uch Keyboard
Automatic Cooking		•	Ŭ	
Auto power off		•		•
OVEN				
Туре	Steam	Oven	Steam	Oven
Interiors	Stainles	ss Steel	Stainles	ss Steel
Pull-down Door		•		•
MAIN FEATURES				
Gross Capacity (cu.ft)	1.	2	1.	.2
Usable Capacity (cu.ft)	1.	.0	1.	
Tangential cooling ventilation		•		•
Total no. of modes	1	2	1	2
PERFORMANCE	•			
Maximum cooking temperature	230°C	C / 446°F	230°C	C / 446°F
Automatic Cooking		•	•	
Steam 210°F / 270°F		•	•	
Steam Injection 210°F		•	•	
Steam + Fan Assisted		•	•	
Assisted Cleaning (CLEAN)	•		•	
Power Output Grill (W)	1	500	1500	
Oven Lights	1x20W			Halogen
Broil Upper Heating Element	1500W		1500W	
Steamer	1500W		1500W	()
Lower Element Wattage	300W		300W	<u> </u>
Convection Element Wattage	2300W	<u> </u>	2300W	
SAFETY	200011		200011	(2101)
Safety Door/ no. Panes of Glass	•)	/3	•/	/3
Control Lock				•
ACCESSORIES				
No. of Lights (20 W halogen)	-	1		1
Removable tank (liters / fl oz)		/ 45	1.4 / 45	
No./Type of Gastronorm Trays	2 / Stainl		2 / Stainless Steel	
Grey Metal Flat/no. of Supports	1/		1/	
DIMENSIONS / WEIGHT	• •	•	.,	·
Width in/mm	29 - 7/8"	758 mm	23 - 3/8"	594 mm
Height in/mm	18 - 5/8"	473 mm	17 - 3/4"	452 mm
Depht in/mm	21"	533 mm	21 - 1/2"	546 mm
Recess (LxHxP) in/mm	(25 - 3/4" x 18" x 22")	(654 x 458 x 560 mm)	(23 - 3/8" x 18" x 22")	(560 x 458 x 560 mm)
POWER / RATINGS	(20 0/7 / 10 / 22)			
KW/Amps rating at 240V, 60Hz	3.3kW	- 13 7Δ	3.31/1/	- 13 7Δ
KW/Amps rating at 2400, 60Hz	2.48kW		3.3kW - 13.7A 2.48kW - 11.9A	
Power Cord		Conduit	Cable + Conduit	
INSTRUCTIONS FOR USE	Cable +	Conduit	Cable +	oonduit





OVEN 700



DISTINTO

WARMING DRAWER

CODE ID	24" MULTIFUNCTION SELF-CLEANING OVEN F7SP24S1		
Series	700 - PYRO		
Finish	Stainles	s Steel	
CONTROL PANEL			
Programming	MODULAR - Electronic		
Automatic Cooking			
Auto power off	•	1	
OVEN			
Туре	Elect	ronic	
Interiors	Black E	namel	
Pull-down Door	•	·	
MAIN FEATURES			
Gross Capacity (cu.ft)	2.	6	
Usable Capacity (cu.ft)	2.	4	
Tangential cooling ventilation	•		
Total no. of modes	1:	5	
PERFORMANCE			
Maximum cooking temperature	250	°C	
Automatic Cooking	•		
Defrosting /Time/Weight)	•		
Sabbath Mode	•		
Assisted Cleaning (CLEAN)	•		
Power Output Grill (W)	3450		
SAFETY			
Door with Safety Lock	•		
Safety Door/ no. Panes of Glass	•/	4	
Control Lock	•		
ACCESSORIES			
No. of Lights (20 W halogen)	1		
No./Type of Gastronorm Trays	1 / Black	Enamel	
Grey Metal Flat/no. of Supports	5)	
DIMENSIONS / WEIGHT			
Width in/mm	23 - 3/8"	594 mm	
Height in/mm	23 - 3/8"	594 mm	
Depht in/mm	21 - 7/8"	556 mm	
Recess (LxHxP) in/mm	(22 - 1/6" x 23" x 22 - 1/6")	(560 x 595 x 560 mm)	
POWER / RATINGS			
KW/Amps rating at 240V, 60Hz	3.40kW	- 14.2A	
KW/Amps rating at 208V, 60Hz	2.50kW	/ - 12A	
Power Cord	Cable + Conduit		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		

CODE ID	24" WARMING DRAWER F4DWD24S1		
Туре	Warmin	g Drawer	
Front finish	Pa	nel	
Internal shelf	Stainle	ss Steel	
Compatible with ovens	F7SP24S1 - F1SM24S2 - F	7SC024S1 - F7DSPD24S1	
PERFORMANCE			
Maximum temperature	185°F	/ 85°C	
Cooking at low temperature (slow cooking)		•	
Leavening		•	
Heating dishes and food		•	
Slow close assistance		-	
Open / Close push - pull system		•	
CONTROL			
Thermostat	86°F - 185°F	/ 30°C - 85°C	
Fan assisted	•		
Function Indicator / Thermostat on/off	•		
SAFETY			
Safety front	•		
ELECTRICAL SPECIFICATIONS			
Max power absorbed (W)	400 W		
Power (V-Hz)	120 V	/ 60 Hz	
Power cord	•		
Plug		•	
CAPACITY			
Volume (cbft-litri)	0,53	15	
DIMENSIONS			
Overall dim - Width	23 - 7/16"	595 mm	
Overall dim - Height	6"	153 mm	
Overall dim - Depth	21 - 7/16"	545 mm	
Cut-out - Width	22 - 1/16"	560 mm	
Cut-out - Height	5 - 1/2"	140 mm	
Cut-out - Depth	22 - 1/16"	560 mm	
WEIGHT			
Net Weight	29 lbs	13 Kg	
Gross Weight	34 lbs	15 Kg	



OVEN 400



CODE ID	30" OVEN 400 F4SP30S3		
Series	400		
Finish	Stainles		
CONTROL PANEL	Otalines		
Control Type	Elect	ronic	
Display: Clock - Temperature - Timer	White		
Language	Eng		
OVEN	3		
Туре	True Co	nvection	
Temperature Regulation	Electronic Control (min/m		
OVEN FUNCTIONS			
	Pyrolytic Self-Clean	Bake	
	True Convection	Broil	
	Convection Bake	Thaw (Defrost)	
	Convection Broil	Oven Lights	
	Convection Roast		
ELECTRIC OVEN FEATURES			
	Temperature	Display °C/°F	
OVEN DOOR(S)			
Oven Glass Window	Large See Th		
Door Cooling System	4 Heat Resis		
Door Hinges	Heavy Duty	Steady Tilt	
OVEN CAVITY			
Gross Capacity (cbft)	4.4		
Usable Capacity (cbft)	4.1		
Cavity Enamel Color	Black 6		
Rack Positions		-	
Oven Lights	3x20W	Halogen	
HEATING ELEMENTS (@240V)	010	0.11/	
Broil Upper Heating Element Upper Auxiliary Element	3100 W		
Lower Auxiliary Element	1032 W 600 W		
Concealed Bake Lower Heating Element	140		
Convection Element	250		
OVEN ACCESSORIES	230	0 W	
Chrome Racks	2)	
Enameled Broiler Pan (basin + anti splash)			
Telescopic Chrome Rack	Opti	onal	
DIMENSIONS/WEIGHT			
Overall dim - Width	29 - 11/16"	754 mm	
Overall dim - Height	27 - 7/8"	707 mm	
Overall dim - Depth	24"	610 mm	
Cut-out - Width	28 - 7/16"	722 mm	
Cut-out - Height (min)	27 - 1/4"	692 mm	
Cut-out - Depth (min)	23 - 1/4"	590 mm	
Gross Weight	181 lbs	82 kg	
POWER / RATINGS (208/240 V, 60 HZ)			
kW / Amps rating at 120-240V, 60Hz	3.70kW		
kW / Amps rating at 120-208V, 60Hz	3.49kW		
Power Cable	Con	duit	
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish	

DISTINTO

WARMING DRAWER

CODE ID		NG DRAWER VD30S1	30" WARMIN F7IWD	
Туре	Warmir	ig Drawer	Warming Drawer	
Front finish	Stainle	ess Steel	Over	lay
Internal shelf	lı lı	וסג	Inc	X
Compatible with ovens	F7SP30S1 - F7DSPD30S1	- F7DSCO30S1 - F4SP30S3	F7SP30S1 - F7DSPD30S1 -	F7DSCO30S1 - F4SP30S3
PERFORMANCE				
Maximum temperature	194°F	/ 90°C	194°F /	90°C
Cooking at low temperature (slow cooking)		•	•	
Leavening		•	•	
Heating dishes and food		•	•	
Slow close assistance		-	-	
Open / Close push - pull system		•	•	
CONTROL				
Thermostat	86°F - 194°F	/ 30°C - 90°C	86°F - 194°F / 30°C - 90°C	
Fan assisted		•	•	
Function Indicator / Thermostat on/off		•	•	
SAFETY				
Safety front	•		•	
ELECTRICAL SPECIFICATIONS				
Max power absorbed (W)	1100W		1100	W
Power (V-Hz)	120/60		120/	60
Power cord	•		•	
Plug	•		•	
CAPACITY				
Volume (cbft-litri)	2,1	61.4	2,1	61.4
DIMENSIONS				
Overall dim - Width	29 - 5/8"	754 mm	29 - 5/8" to 29 - 7/8"	754 mm to 758 mm
Overall dim - Height	10 - 3/8"	264 mm	10 - 3/8"	264 mm
Overall dim - Depth	23"	583 mm	23"	583 mm
Door Depth with Overlay	15/16"	24 mm	7/8"	22 mm
Cut-out - Width	28 - 7/16"	722 mm	28 - 7/16"	722 mm
Cut-out - Height	9 - 1/4"	235 mm	9 - 1/4"	235 mm
Cut-out - Depth	24"	610 mm	24"	610 mm
WEIGHT		·		
Net Weight	67.2 lbs	30.5 Kg	62.8 lbs	28.5 Kg
Gross Weight	74.1 lbs	33.6 Kg	69.7 lbs	31.6 Kg





MULTIFUNCTION SELF-CLEAN OVEN



CODE ID	30" MULTIFUNCTION		
	F1SP	30S3	
Series	10	00	
Finish	Stainles	s Steel	
CONTROL PANEL			
Control Type	Elect	ronic	
Display: Clock - Timer - Temperature	White	EED	
Language	Eng	lish	
OVEN			
Туре	Elect	ronic	
Temperature Regulation	Electronio (min/max 120/48		
OVEN FUNCTIONS			
	Pyrolytic Self-Clean	Bake	
	True Convection	Broil	
	Convection Bake	Thaw (Defrost)	
	Convection Broil	Oven Lights	
	Convection Roast		
GAS OVEN FEATURES			
	Temperature	e Display °C/°F	
OVEN DOOR(S)			
Oven Glass Window	Large See Th		
Door Cooling System	4 Heat Resis		
Door Hinges	Heavy Duty		
Handle Style	Tubula	r Steel	
OVEN CAVITY Gross Capacity (cbft)	3.	0	
Usable Capacity (cbft) Cavity Enamel Color	2.8 Black		
Rack Positions	4		
Oven Lights	2x20W Halogen		
HEATING ELEMENTS (@240V)			
Broil Upper Heating Element	31	00 W	
Upper Auxiliary Element	1032 W		
Lower Auxiliary Element	600 W		
Concealed Bake Lower Heating Element		00 W	
Convection Element	25	500 W	
OVEN ACCESSORIES			
Chrome Racks	2	2	
Enameled Broiler Pan (basin + anti splash)	t		
Telescopic Chrome Rack	Opti	onal	
DIMENSIONS/WEIGHT			
Overall dim - Width	29 - 3/8"	745 mm	
Overall dim - Height	23 - 3/16"	589 mm	
Overall dim - Depth	22 - 1/16"	560 mm	
Cut-out - Width	28"	710 mm	
Cut-out - Height (min)	23"	585 mm	
Cut-out - Depth (min)	24"	610 mm	
Gross Weight	148 lbs	67 kg	
POWER / RATINGS (208/240 V, 60 HZ) kW / Amps rating at 120-240V, 60Hz	0.001344	15.64	
kW / Amps rating at 120-240V, 60Hz kW / Amps rating at 120-208V, 60Hz	3.63kW 3.53kW		
Power Cable	Con		
INSTRUCTIONS FOR USE	Con		
Use & Care Manual / Installation Manual	English / Frer	och / Spanish	
	Eligiisi / Flei		

DISTINTO

MULTIFUNCTION EASY-CLEAN OVEN



CODE ID		N EASY-CLEAN OVEN M30S3		N EASY-CLEAN OVEN 124S2	
Series	100		100		
Finish	Stainle	ess Steel	Stainle	Stainless Steel	
CONTROL PANEL	C tall to				
Control Type	2 Knobs / 3	Touch Buttons	2 Knobs / 3 Touch Buttons		
Display: Clock - Timer		e LED		e LED	
OVEN					
Туре	Elec	tronic	Flect	tronic	
		nanical Control		anical Control	
Temperature Regulation		640°F - 50/285°C)		80°F - 50/250°C)	
OVEN FUNCTIONS					
	Convection	Bake	Convection	Bake	
	Convection Bake	Oven Lights	Convection Bake	Oven Lights	
	Convection Broil	Broil	Convection Broil	Broil	
	Convection Boast		Convection Broast		
OVEN DOOR(S)	Convoluon nudai	<u> </u>	Convection notast		
Oven Glass Window	Large Coo T	hrough Glass	Large Soo T	hrough Glass	
Door Cooling System		stant Glasses		stant Glasses	
Door Hinges		y Steady Tilt		/ Steady Tilt	
Handle Style	,	ar Steel	· · ·	ar Steel	
OVEN CAVITY	Tubu		Tubula		
Gross Capacity (cbft)		3.0	2	6	
Usable Capacity (cbft)			2.6		
Cavity Enamel Color	2.8		Black		
Rack Positions	Black 4			аск 5	
	2x20W Halogen			-	
Oven Lights HEATING ELEMENTS (@240V)	2X20VV	Halogen	1x20vv	Halogen	
	01/	20.14/	100	0.14/	
Broil Upper Heating Element	3100 W 1032 W			00 W	
Upper Auxiliary Element	10.	-		00 W	
Lower Auxiliary Element	-			-	
Concealed Bake Lower Heating Element	2100 W			00 W	
Convection Element			230	0 W	
OVEN ACCESSORIES		<u></u>		2	
Chrome Racks		2		2	
Enameled Broiler Pan (basin + anti splash)		sin only)		1	
Telescopic Chrome Rack	Opt	tional	Opt	ional	
DIMENSIONS/WEIGHT	00 0/0#	745	00.0/0#	504	
Overall dim - Width	29 - 3/8"	745 mm	23 - 3/8"	594 mm	
Overall dim - Height	23 - 3/16"	589 mm	23 - 3/8"	594 mm	
Overall dim - Depth	22 - 1/16"	560 mm	21 - 7/8"	556 mm	
Cut-out - Width	28"	710 mm	22 - 1/16"	560 mm	
Cut-out - Height (min)	23"	585 mm	23"	585 mm	
Cut-out - Depth (min)	24"	610 mm	22 - 1/16"	560 mm	
Gross Weight	148 lbs	67 kg	90 lbs	41 kg	
POWER / RATINGS (208/240 V, 60 HZ)					
kW / Amps rating at 120-240V, 60Hz		V - 15.6A	2.35kW - 9.8A		
kW / Amps rating at 120-208V, 60Hz		V - 13.7A		V - 8.6A	
Power Cable	Co	nduit	Cor	nduit	
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / Fre	ench / Spanish	English / Fre	nch / Spanish	





MICROWAVES



CODE ID	24" BUILT-IN MICROWAVE F7DMW24S2		
MW Types	Drawer		
Drawer Opening	Open/Close Button		
Finish	Stainless Steel / Black Glass		
Oven Floor	Patterned Glass		
CONTROL PANEL			
Control Panel Location	Center Top		
Control Panel Type	Touch Control		
Display Type			
Display Color	White on Black Background		
CAPACITIES	White on Black Background		
Cavity Size (cu.ft)	1.2		
FEATURES	1.2		
Timer/Setting	•		
Power Selection	11 levels		
Output Power (watts)	950		
	Incandescent		
Interior Light Start/+30 Sec	incandescent		
Clock			
Multi-Stage Cooking	4		
Control Lock	•		
Demo Mode	•		
Microwave ON Indicator			
	•		
End of Cooking Reminder Auto Start			
Standby Mode			
Sensor	Popcorn / Reheat		
Sensor Cook Menu	11 (Baked Potatoes, Sweet Potatoes, Fish/ Seafood, Brown Rice, White Rice, Quick Fresh Vegetables, Longer Fresh Vegetables, Steamer Bag, Frozen Vegetables, Ground Meat, Frozen Entrees)		
Melt, Soft & Warm Options	5 (Butter, Chocolate, Ice Cream, Cream Cheese, Syrup, Dessert Topping)		
Defrost	6 (Ground Meat, Steaks/Chops, Boneless Poultry, Bone-in Poultry, Roast, Casserole or Soup)		
Other Menus	3 (Beverage Reheat, Hot Water, Hot Cereal)		
TECHNICAL FEATURES			
Supply Voltage, V/Hz	120V/ 60Hz		
Rated Current, A	14.5 A		
DIMENSIONS			
Cavity Dimension (WxDxH)	17-5/16" x 16-9/16" x 7-1/8"		
Exterior Dimension (WxDxH)	23-7/8" x 23-3/8" x 16"		
Carton Dimension (WxDxH)	29-1/4" x 27-7/8" x 21-1/2"		
Net Weight / Gross Weight	74.0 lbs / 85.8 lbs		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French		

DISTINTO

MICROWAVES

CODE ID	24" COUNTER-TOP MICROWAVE F4MW024S1	
Handle	No Handle - Push Button Open	
Installation	CounterTop or with Trim Kit	
Finish	Stainless Steel	
CONTROL PANEL		
Control System	Electronic - Touch Control	
Display & Digital Clock	2 Lines LCD - Segment Style	
Color	White Fonts on Black Background	
CAPACITIES		
Cavity Size (cu.ft)	2.0	
FEATURES		
Power Selection	11 levels	
Sensor Cook Menu	11 (Baked Pototates, Fish Seafood, Fresh Vegetables, Frozen Entrees, Frozen Snacks, Frozen Vegetables, Meat, Rice, Sensor Reheat, Popcorn, Poultry)	
Breakfast Menu	5 (Scrambled Eggs, Bacon, Hot Cereal, Heat Rolls/Muffins, Frozen Breakfast Foods)	
Lunch Menu	5 (Meal in a Cup, Hot Dogs in Buns, Soup, Microwave Pizza, Frozen Sandwich)	
Dinner Menu	5 (Saucy Chicken, Hawaiian Pork, Fiesta Chili, Glazed Salmon, Healthy Frittata)	
Quick Recipes	5 (Beef Wraps, Mexican Chicken, Italian Salad, Tuna Macaroni, Garden Medley)	
Defrost	4 (Steaks Chops or Fish, Chicken Pieces, Roast, Casserole/Soup)	
(Super) Defrost	3 (Ground Meat, Boneless Poultry, Bone-in Chicken Pieces)	
Beverage	2 (to make Coffee or Tea, to sensor Reheat Beverage)	
Help Menu	5 (Child Lock, Audible Signal Elimination, Auto Start, Language / Weight Selection, Clock On/Off)	
Oven Light	1 Incandescent	
TECHNICAL FEATURES		
Supply Voltage, V/Hz	120V/ 60Hz	
Rated Current, A	2.2 A	
DIMENSIONS		
Cavity Dimension (WxDxH)	17 - 3/8" x 18 - 5/8" x 10 - 1/4"	
Exterior Dimension (WxD*H)	23 - 15/16" x 19 - 1/4" x 13 - 3/8"	
Net Weight / Gross Weight	51.1 lbs / 64.1 lbs	
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French	



MICROWAVES



DISTINTO

COFFEE MACHINE

CODE ID	30" MICROWAVE OVEN F40TR30S1	
MW Types	Turn Table / Recessed Cavity	
Finisj	Stainless Steel	
CONTROL PANEL		
Control System	Electronic - Touch Control	
Display & Digital Clock	White LED	
CAPACITIES		
Cavity Size (cu.ft)	1.8	
TT Diameter	12.8" (ø 325mm)	
FEATURES		
Timer	99 min. 99 sec. (plus Sound On/Off for 3 sec holding)	
Power Selection	10 levels	
Charcoal Filter	1	
Air Filters	2	
Ventilation Type Available	Front / Top / Rear	
Ventilation Fan Speed	Turbo / High / Low / Off (max 450 CFM)	
Sensor Cook Menu	4 (Frozen Entrée, Frozen Vegetable, Reheat, Potato)	
Programmed Cook	2 (Beverage, Popcorn)	
Soften/ Melt Menu	4 (Butter, Chocolate, Icecream, Cheese)	
Defrost	Time/ Weight	
Keep Warm	•	
Chrome Rack	1 ea	
Oven Light	1 LED (On/Off)	
CookTop Light	1 LED (On/Off)	
Turnable	On/ Off	
Display On/Off	Clock key	
Security	Child-Safe Lock-Out Feature	
Express Cook	1~6 minutes	
Extra Seconds	+30 sec	
TECHNICAL FEATURES		
Supply Voltage, V/Hz	120V/60Hz	
Rated Current, A	2.2 A	
Noise Level, dBA	44	
DIMENSIONS/WEIGHT		
Cavity Dimension (W x D x H)	20 - 5/8" x 14 - 7/8" x 10"	
Exterior Dimension (W x D x H)	29 - 9/10" x 15 - 9/10" x 16 - 3/10"	
Carton Dimension (W x D x H)	33 - 5/16" x 18 - 13/16" x 20 - 5/16"	
Net Weight / Gross Weight	51.1 lbs / 64.1 lbs	
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French	

CODE ID	30" BUILT-IN COFFEE MACHINE + FRAME KIT F7BC24B1 + F7DTK30BC		
Туре		Coffee machine	
Finish		Stainless steel	
PERFORMANCE			
Total no. of modes		30	
Automatic modes	Coff	ee, Steam, Hot water	
Programming		ull touch electronic	
Energy efficiency		A	
Annual energy consume (kWh)		45	
Water tank capacity	60 fl. oz	1.8 L	
Coffee container capacity	7 oz	200 g	
Automatic coffee grinder with 13 levels regulations		•	
Cups of coffee nr.		2	
Coffee dispenser height regulation 3.14 - 3.93 in / 80 - 100 mm	•		
Retractable dispenser for steam and hot water	•		
LED lighting		•	
Filter		•	
Automatic cleaning program		•	
Milk container 25 fl.oz		•	
Drip tray		•	
Water tank refill warning light		•	
ELECTRICAL SPECIFICATION (120V, 60 HZ)			
Max rated power (W)		1350 W	
Pump pressure (bar)		15	
SIZE			
Overall dim - width	29 -7/8"	758 mm	
Overall dim - height	18 - 3/4"	476 mm	
Overall dim - depth	18 - 3/4"	476 mm	
Cutout - width	28 - 3/8" 722 mm		
Cutout - height (min)	18 - 1/4" 463 mm		
Cutout - depth (min)	22" 560 mm		
INSTRUCTION FOR USE			
Use & Care Manual / Installation Manual		EN, SP, FR	

NEW



COFFEE MACHINE



CODE ID		COFFEE MACHINE 3C24S1	
Туре	Coffe	e machine	
Finish	Bla	ck Glass	
PERFORMANCE			
Total no. of modes		30	
Automatic modes	Coffee, Ste	eam, Hot water	
Programming	Full touc	ch electronic	
Energy efficiency		A	
Annual energy consume (kWh)		45	
Water tank capacity	60 fl. oz	1.8 L	
Coffee container capacity	7 oz	200 g	
Automatic coffee grinder with 13 levels regulations		•	
Cups of coffee nr.		2	
Coffee dispenser height regulation 3.14 - 3.93 in / 80 - 100 mm	•		
Retractable dispenser for steam and hot water	•		
LED lighting		•	
Filter		•	
Automatic cleaning program	•		
Milk container 25 fl.oz	•		
Drip tray		•	
Water tank refill warning light		•	
ELECTRICAL SPECIFICATION (120V, 60			
Max rated power (W)	13	350 W	
Pump pressure (bar)		15	
SIZE			
Overall dim - width	23 - 3/8"	594 mm	
Overall dim - height	18"	456 mm	
Overall dim - depth	18 - 3/4"	475 mm	
Cutout - width	22" 560 mm		
Cutout - height (min)	18" 458 mm		
Cutout - depth (min)	22" 560 mm		
INSTRUCTION FOR USE			
Use & Care Manual / Installation Manual	EN, SP, FR		

DISTINTO

COFFEE MACHINE

CODE ID	24" BUILT-IN COFFEE MACHINE F7BC24B1		
Туре		Coffee machine	
Finish		Black Glass	
PERFORMANCE			
Total no. of modes		30	
Automatic modes	Co	offee, Steam, Hot water	
Programming		Full touch electronic	
Energy efficiency		Α	
Annual energy consume (kWh)		45	
Water tank capacity	60 fl. oz	1.8 L	
Coffee container capacity	7 oz	200 g	
Automatic coffee grinder with 13 levels regulations		•	
Cups of coffee nr.	2		
Coffee dispenser height regulation 3.14 - 3.93 in / 80 - 100 mm	•		
Retractable dispenser for steam and hot water	•		
LED lighting		•	
Filter		•	
Automatic cleaning program		•	
Milk container 25 fl.oz		•	
Drip tray		•	
Water tank refill warning light		•	
ELECTRICAL SPECIFICATION (120V, 60 HZ)			
Max rated power (W)		1350 W	
Pump pressure (bar)		15	
SIZE			
Overall dim - width	23 - 3/8"	595 mm	
Overall dim - height	17 - 7/8"	455 mm	
Overall dim - depth	18 - 3/4" 475 mm		
Cutout - width	22" 560 mm		
Cutout - height (min)	18" 458 mm		
Cutout - depth (min)	22" 560 mm		
INSTRUCTION FOR USE			
Use & Care Manual / Installation Manual		EN, SP, FR	

NEW



PRO GAS COOKTOP



CODE ID	36" PRO GAS COOK TOP F4PGK365S1			
Finish	Stainless Steel			
CONTROL PANEL				
Control Type	Kno	bbs		
СООКТОР				
Туре	GAS (NO	G or LP)		
Cooking Surface	Matte Blac	ck Enamel		
GAS COOKTOP FEATURES				
Electric Re-ignition system	•			
Flame-out sensing	•			
Dual Crown Brass Burner	•			
Simmer Plate	Opti	onal		
Small Pot Insert (for single burners only)	Opti	onal		
Wok Ring (for dual burner only)	Opti	onal		
Heavy Duty Cast Iron Grates	3			
Cooking Zones	5			
Brass Burners types	Aluminum Dual Fla	me/Simmer Burner		
Power (Max/Min) (Front-L)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W			
Power (Max/Min) (Rear-L)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W			
Power (Max/Min) (Front Center)	20000 (BTU/h) - 5880W / 750 (BTU/h) - 220W			
Power (Max/Min) (Rear-R)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W			
Power (Max/Min) (Front-R)	15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W			
DIMENSIONS/WEIGHT				
Overall dim - Width	36"	914 mm		
Overall dim - Height	3 - 7/16"	87 mm		
Overall dim - Depth	21"	533 mm		
Cut-out - Width (min - max)	34 - 1/2" , 34 - 11/16"	876 mm - 881 mm		
Cut-out - Height (min)	3 - 3/8"	87 mm		
Cut-out - Depth (min - max)	19 - 9/16" , 19 - 3/4"	497 mm - 502 mm		
Gross Weight	73 lbs	33.2 kg		
POWER / RATINGS (120 V, 60 HZ)				
Amps	0.1A			
Max Power	80000 (BTU/h) - 23480W			
Power Cable	Nema 5-15P			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish			

DISTINTO

PRO GAS COOKTOP

CODE ID	30" PRO GAS COOK TOP F4PGK305S1		
Finish	Stainless Steel		
CONTROL PANEL			
Control Type	Kno	bbs	
COOKTOP			
Туре	GAS (NO	G or LP)	
Cooking Surface	Matte Blac	ck Enamel	
GAS COOKTOP FEATURES			
Electric Re-ignition system		•	
Flame-out sensing		•	
Dual Crown Brass Burner			
Simmer Plate	Opti	onal	
Small Pot Insert (for single burners only)	Opti	onal	
Wok Ring (for dual burner only)	Opti	onal	
Heavy Duty Cast Iron Grates	2		
Cooking Zones	5		
Burners types	Aluminum Dual Fla	me/Simmer Burner	
Power (Max/Min) (Front-L)	8000 (BTU/h) - 2345W	/ 1300 (BTU/h) - 382W	
Power (Max/Min) (Rear-L)	10500 (BTU/h) - 3080W	/ 2200 (BTU/h) - 645W	
Power (Max/Min) (Center)	20000 (BTU/h) - 5880W	/ 750 (BTU/h) - 220W	
Power (Max/Min) (Rear-R)	10500 (BTU/h) - 3080W	/ 2200 (BTU/h) - 645W	
Power (Max/Min) (Front-R)	8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W		
DIMENSIONS/WEIGHT			
Overall dim - Width	30"	762 mm	
Overall dim - Height	3 - 7/16"	87 mm	
Overall dim - Depth	21"	533 mm	
Cut-out - Width (min - max)	28" - 1/2 , 28" - 11/16	724 mm - 729 mm	
Cut-out - Height (min)	3 - 3/8"	87 mm	
Cut-out - Depth (min - max)	19" - 9/16 , 19" - 3/4	497 mm - 502 mm	
Gross Weight	61 lbs	27.5 kg	
POWER / RATINGS (120 V, 60 HZ)			
Amps	0.1A		
Max Power	57000 (BTU/h) - 16730W		
Power Cable	Nema 5-15P		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish	

TECHNICAL DATA



GAS COOKTOP





DISTINTO

GAS COOKTOP



CODE ID	44" GAS COOKTOP F4GK42S1			COOKTOP <36S1
Series	40	00	4	00
Finish	Stainle	ss Steel	Stainle	ss Steel
CONTROL PANEL				
Control Type	Kn	obs	Kn	obs
COOKTOP				
Туре	GAS (N	G or LP)	GAS (N	G or LP)
Cooking Surface	Matte Bla	ck Enamel	Matte Bla	ck Enamel
GAS COOKTOP FEATURES				
Electric Re-ignition system		•		•
Flame-out sensing		•		•
Dual Flame Burner		•		•
Simmer Plate	Opti	ional	Opt	ional
Small Pot Insert (for single burners only)	Opt	ional	Opt	ional
Wok Ring (for dual burner only)	Opt	ional	Opt	ional
Heavy Duty Cast Iron Grates		4		3
Cooking Zones	4		5	
Burners types	Sealed Burners (all) - Dual Flame/Simmer Burner (only Left)		Sealed Burners (all) - Dual Flame/Simmer Burner (only Cente	
Power (Max/Min) (Left)	18000 (BTU/h) - 5275W	/ 700 (BTU/h) - 205W	-	
Power (Max/Min) (Front-L)		-	6300 (BTU/h) - 1850W / 1300 (BTU/h) - 380W	
Power (Max/Min) (Rear-L)		-	9000 (BTU/h) - 2640W / 1300 (BTU/h) - 380W	
Power (Max/Min) (L Center)	4000 (BTU/h) - 1175W / 1000 (BTU/h) - 295W		-	
Power (Max/Min) (Front Center)	-		18000 (BTU/h) - 5275W	/ 700 (BTU/h) - 205W
Power (Max/Min) (R Center)	9000 (BTU/h) - 2640W / 1300 (BTU/h) - 380W			-
Power (Max/Min) (Front-R)	-		4000 (BTU/h) - 1175W / 1000 (BTU/h) - 295W	
Power (Max/Min) (Rear-R)	-		12000 (BTU/h) - 3520W / 2200 (BTU/h) - 645W	
Power (Max/Min) (Right)	15000 (BTU/h) - 4400W	/ 2700 (BTU/h) - 790W	-	
DIMENSIONS/WEIGHT				
Overall dim - Width	44"	1120 mm	36"	910 mm
Overall dim - Height	5 - 3/16"	132 mm	5 - 3/16"	132 mm
Overall dim - Depth	16 - 3/4"	425 mm	20 - 1/16"	510 mm
Cut-out - Width (min - max)	43 - 1/8", 43 - 1/4"	1096 mm - 1099 mm	34 - 7/8", 35"	886 mm - 889 mm
Cut-out - Height (min)	2 - 15/16"	74 mm	2 - 15/16"	74 mm
Cut-out - Depth (min - max)	15 - 15/16", 16 - 1/16"	405 mm - 408 mm	19 - 5/16", 19 - 3/8"	490 mm - 493 mm
Gross Weight	45 lbs	20 kg	55 lbs	25 kg
POWER / RATINGS (120 V, 60 HZ)				
Amps	0.1A		0.1A	
Max Power	46000 (BTU/h) - 13475W		52300 (BTU/h) - 15320W	
Power Cable	Nema 5 - 15P		Nema 5 - 15P	
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fre	nch / Spanish	English / Fre	nch / Spanish

CODE ID	30" GAS COOKTOP F4GK30S1			COOKTOP K24S1
Series	4	400	400	
Finish	Stainle	ess Steel	Stainle	ess Steel
CONTROL PANEL				
Control Type	Kr	nobs	Kr	nobs
СООКТОР				
Туре	GAS (N	NG or LP)	GAS (N	IG or LP)
Cooking Surface	Matte Bla	ack Enamel	Matte Bla	ack Enamel
GAS COOKTOP FEATURES				
Electric Re-ignition system		•		•
Flame-out sensing		•		•
Dual Flame Burner		•		•
Simmer Plate	Op	tional	Opt	tional
Small Pot Insert (for single burners only)	Op	tional	tqO	tional
Wok Ring (for dual burner only)	Optional -		_	
Heavy Duty Cast Iron Grates	2		4	
Cooking Zones	5		4	
Burners types	ç		Sealed Burners (all) - Dual Flame/Simmer Burner (only Front-	
Power (Max/Min) (Left)	18000 (BTU/h) - 5275W / 700 (BTU/h) - 205W		,	-
Power (Max/Min) (Front-L)	-		18000 (BTU/h) - 5275W	/ 700 (BTU/h) - 205W
Power (Max/Min) (Rear-L)		-	6300 (BTU/h) - 1850W	()
Power (Max/Min) (Front Center)	4000 (BTU/h) - 1175W	/ 1000 (BTU/h) - 295W		-
Power (Max/Min) (Rear Center)	12000 (BTU/h) - 3520W			-
Power (Max/Min) (Front-R)	6300 (BTU/h) - 1850W	/ 1300 (BTU/h) - 380W	4000 (BTU/h) - 1175W	/ 1000 (BTU/h) - 295W
Power (Max/Min) (Rear-R)	9000 (BTU/h) - 2640W		12000 (BTU/h) - 3520W	
DIMENSIONS/WEIGHT				
Overall dim - Width	30"	760 mm	24 - 1/2"	620 mm
Overall dim - Height	5 - 3/16"	132 mm	5 - 3/16"	132 mm
Overall dim - Depth	20 - 1/16"	510 mm	20 - 1/16"	510 mm
Cut-out - Width (min - max)	29". 29 - 1/8"	737 mm - 740 mm	23 - 1/2". 23 - 5/8"	597 mm - 600 mm
Cut-out - Height (min)	2 - 15/16"	74 mm	2 - 15/16"	74 mm
Cut-out - Depth (min - max)	19 - 5/16", 19 - 3/8"	490 mm - 493 mm	19 - 5/16", 19 - 3/8"	490 mm - 493 mm
Gross Weight	45 lbs	20 kg	41 lbs	19 kg
POWER / RATINGS (120 V, 60 HZ)				
Amps	0	0.1A	0	.1A
Max Power	49300 (BTU/h) - 14440W		40300 (BTU/h) - 11800W	
Power Cable	Nema 5 - 15P		· · · · ·	5 - 15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish		English / French / Spanish	





INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM



CODE ID	36" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM F7IT36S1				
Series		70	0		
Finish		Ceramic glass with	n aluminum frame		
CONTROL PANEL					
Control Type	Touch Control				
СООКТОР					
Туре		INDUC	TION		
Cooking Surface		Ceramie	c Glass		
Slider Touch Control for Power Setting		•	1		
Digital Display for Power Level		•			
INDUCTION COOKTOP FEATURES					
Pot Detection System		•	1		
Bridge double zone		•	1		
Power Levels		1 to	9		
Warming Function 158°F / 70°C		•			
Booster/Fast Boil Function for Each Zone	•				
Auto-boil and Reduce for Each Zone	•				
Residual Heat Indication	•				
Individual Timer for each Zone	•				
Child Lock	•				
Key Lock (LED)	•				
Pause/recall (LED)	•				
General ON/OFF Key (LED)		•	1		
Cooking Zones		5	;		
Burners types (Front-L) - Power (Max/Booster)	Inductor	11"	(280 mm)	2300W / 3600W	
Burners types (Rear Central) - Power (Max/Booster)	Inductor	7"	(180 mm)	1850W / 3000W	
Burners types (Front Central) - Power (Max/Booster)	Inductor	5 - 3/4"	(145 mm)	1400W / 2200W	
Burners types (Rear/Front-R) - Power (Max/Booster)	(Octagonal) Inductor	7 - 1/2" x 8 - 1/2"	(190 mm x 220 mm)	2000W / 3600W	
DIMENSIONS/WEIGHT					
Overall dim - Width		36 - 3/16"	919 mm		
Overall dim - Height		4"	100 mm		
Overall dim - Depth		21 - 3/16"	538 mm		
Cut-out - Width (Tolerance)		34 - 5/8" tol. 1/16"	879 mm - (tol. 1 mm)		
Cut-out - Height		2 - 5/8" + conduit 1 - 1/16"	67 mm + conduit (27 r	nm)	
Cut-out - Depth (Tolerance)	19 - 3/8" tol. 1/16" 492 mm - (tol. 1 mm)			-	
Gross Weight	55 lbs 25 kg				
POWER / RATINGS (208/240 V, 60 HZ)					
kW / Amps rating at 240V, 60Hz	10.8 kW - 45A				
kW / Amps rating at 208V, 60Hz	9.4 kW - 45A				
Power Cable	Conduit				
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual		English / Fren	ch / Spanish		

DISTINTO

INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM

CODE ID	30" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM F7IT30S1			
Series		70	00	
Finish		Ceramic glass with	h aluminum frame	
CONTROL PANEL				
Control Type	Touch Control			
СООКТОР				
Туре		INDUC	CTION	
Cooking Surface		Cerami	c Glass	
Slider Touch Control for Power Setting		•)	
Digital Display for Power Level		•)	
INDUCTION COOKTOP FEATURES				
Pot Detection System		•)	
Power Levels		1 to	o 9	
Warming Function 158°F / 70°C		•)	
Booster/Fast Boil Function for Each Zone	•			
Auto-boil and Reduce for Each Zone	•			
Residual Heat Indication	•			
Individual Timer for each Zone	•			
Child Lock	•			
Key Lock (LED)	•			
Pause/recall (LED)	•			
General ON/OFF Key (LED)		•)	
Cooking Zones		4	ļ	
Burners types (Front-L) - Power (Max/Booster)	Inductor	11"	(280 mm)	2300W / 3600W
Burners types (Rear Central) - Power (Max/Booster)	Inductor	7"	(180 mm)	1850W / 3000W
Burners types (Rear-R) - Power (Max/Booster)	Inductor	5 - 3/4"	(145 mm)	1400W / 2200W
Burners types (Front-R) - Power (Max/Booster)	Inductor	7"	(180 mm)	1850W / 3000W
DIMENSIONS/WEIGHT				
Overall dim - Width		30 - 3/8"	771 mm	
Overall dim - Height		4"	100 mm	
Overall dim - Depth		21 - 3/16"	538 mm	
Cut-out - Width (Tolerance)		28 - 3/4" tol. 1/16"	730 mm - (tol. 1	mm)
Cut-out - Height		2 - 5/8" + conduit 1 - 1/16"	67 mm + condui	/
Cut-out - Depth (Tolerance)		19 - 7/16" tol. 1/16"	494 mm - (tol. 1	mm)
Gross Weight	40 lbs 18 kg			
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz		7.2 kW		
kW / Amps rating at 208V, 60Hz	6.45 kW - 31A			
Power Cable	Conduit			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual		English / Frer	ich / Spanish	



TECHNICAL DATA

RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM



CODE ID	36" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM F6RT36S2				
Series		600			
Finish	Ceramic glas	s with aluminum frame			
CONTROL PANEL					
Control Type	Touch Control				
COOKTOP					
Туре		RADIANT			
Cooking Surface	Ce	eramic Glass			
RADIANT COOKTOP FEATURES					
Power Setting	Peacock S	Slider Touch Control			
Digital Display for Power Level		5			
Low Power Scale for Delicate Cooking		•			
Control Display Lock		•			
Automatic Fast Boil Function		•			
Hot Surface Indication	•				
Timer Functions	1+5				
Timer Display	•				
Acoustic Buzzer	•				
Failure Codes Indication	•				
Cooking Zones		5			
Burners types (Front/Rear-L) - Power	7"	(180 mm)	1800W		
Bridge Element - Power			800W		
Burners types (Central) - Power	9"/7"/5"	(230 mm / 180 mm / 127 mm)	2500W / 1600W / 800W		
Burners types (Rear-R) - Power	7"	180 mm	1800W		
Burners types (Front-R) - Power	6"	153 mm	1200W		
DIMENSIONS/WEIGHT					
Overall dim - Width	36 - 3/16"	919 mm			
Overall dim - Height	3 - 5/16" + conduit 15/16"	84 mm + conduit (24 mm)			
Overall dim - Depth	21 - 3/16"	538 mm			
Cut-out - Width (min - max)	34 - 1/16", 34 - 5/16"	865 mm - 872 mm			
Box - Height	3 - 1/16" + conduit 15/16"	78 mm + conduit (24 mm)			
Cut-out - Depth (min - max)	19 - 1/4", 19 - 5/8"	490 mm - 498 mm			
Gross Weight	44 lbs 20 kg				
POWER / RATINGS (208/240 V, 60 HZ)					
kW / Amps rating at 240V, 60Hz	9.90kW - 41.3A				
kW / Amps rating at 208V, 60Hz	7.44kW - 35.8A				
Power Cable	Conduit				
INSTRUCTIONS FOR USE					
Use & Care Manual / Installation Manual	English / French / Spanish				

DISTINTO

RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM

CODE ID	30" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM F6RT30S2		
Series		600	
Finish	Ceramic glas	s with aluminum frame	
CONTROL PANEL	<u> </u>		
Control Type	Та	ouch Control	
COOKTOP			
Туре		RADIANT	
Cooking Surface	Ce	eramic Glass	
RADIANT COOKTOP FEATURES			
Power Setting	Peacock	Slider Touch Control	
Digital Display for Power Level		4	
Low Power Scale for Delicate Cooking		•	
Control Display Lock		•	
Automatic Fast Boil Function		•	
Hot Surface Indication		•	
Timer Functions		1+4	
Timer Display		•	
Acoustic Buzzer		•	
Failure Codes Indication		•	
Cooking Zones		4	
Burners types (Front-L) - Power	6"	(153 mm)	1200W
Burners types (Rear-L) - Power	9"/7"/5"	(230 mm / 180 mm / 127 mm)	2500W / 1600W / 800W
Burners types (Rear-R) - Power	8"/5"	(203 mm / 127 mm)	2200W / 800W
Burners types (Front-R) - Power	6"	(153 mm)	1200W
DIMENSIONS/WEIGHT			
Overall dim - Width	30 - 3/8"	771 mm	
Overall dim - Height	3 - 5/16" + conduit 15/16"	84 mm + conduit (24 mm)	
Overall dim - Depth	21 - 3/16"	538 mm	
Cut-out - Width (min - max)	28 - 11/16", 28 - 15/16"	729 mm - 735 mm	
Box - Height	3 - 1/16" + conduit 15/16"	78 mm + conduit (24 mm)	
Cut-out - Depth (min - max)	19 - 1/4", 19 - 5/8"	490 mm - 498 mm	
Gross Weight	36 lbs	16 kg	
POWER / RATINGS (208/240 V, 60 HZ)			
kW / Amps rating at 240V, 60Hz	7.1	0kW - 29.6A	
kW / Amps rating at 208V, 60Hz	5.3	33kW - 25.6A	
Power Cable		Conduit	
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English	/ French / Spanish	



RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM



DISTINTO

INSERT HOOD



CODE ID	24" RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM F3RK24S2		
Series		300	
Finish	Ceramic glass v	vith aluminum frame	
CONTROL PANEL	· · · · · · · · · · · · · · · · · · ·		
Control Type	К	ínobs	
СООКТОР			
Туре	RA	DIANT	
Cooking Surface	Cerar	mic Glass	
RADIANT COOKTOP FEATURES			
Power Setting	9	Levels	
Digital Display for Power Level		-	
Hot Surface Indication		•	
Cooking Zones		4	
Burners types (Front-L) - Power	7 - 3/47" / 4 -3/4" 19	97 mm / 121 mm 1900W / 800W	
Burners types (Rear-R) - Power	5 - 1/2" 1-	40 mm 1200W	
Burners types (Front-R - Rear-L) - Power	7" 1	80 mm 1800W	
DIMENSIONS/WEIGHT			
Overall dim - Width	24"	618 mm	
Overall dim - Height	3 - 5/16" + conduit 15/16"	84 mm + conduit (24 mm)	
Overall dim - Depth	21 - 3/16"	538 mm	
Cut-out - Width (min - max)	22 - 5/8", 22 - 13/16"	574 mm - 580 mm	
Box - Height	3 - 1/16" + conduit 15/16"	78 mm + conduit (24 mm)	
Cut-out - Depth (min - max)	19 - 1/4", 19 - 9/16"	490 mm - 497 mm	
Gross Weight	30 lbs	14 kg	
POWER / RATINGS (208/240 V, 60 HZ)			
kW / Amps rating at 240V, 60Hz	6.10k	W - 25.4A	
kW / Amps rating at 208V, 60Hz		W - 22.0A	
Power Cable	C	onduit	
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / Fr	rench / Spanish	

CODE ID	34" INSEF F6BP		28" INSEI F4BP	
Series	60	0	400	
Finish	Insert - Stai	nless Steel	Insert - Sta	inless Steel
CONTROL PANEL				
Control Type	4 speed mech	anical control	4 speed mech	nanical control
PERFORMANCES	-			
Output (CFM)	60	00	60	00
Sound Level (dB)	6	9	6	9
Motor	Or	ıe	OI	ne
Venting Type	Ducted and	recirculating	Ducted and	recirculating
FEATURES				
Filter Style	Pro E	Baffle	Ba	ffle
Lighting	2 x 1.2	W LED	2 x 1.2	W LED
Duct diameter	5 - 15/16"	150 mm	5 - 15/16"	150 mm
DIMENSIONS/WEIGHT				
Overall dim - Width	34 - 1/4"	870 mm	28 - 3/8"	720 mm
Overall dim - Height	13 - 1/8"	330 mm	10 - 5/8"	270 mm
Overall dim - Depth	18 - 1/2"	470 mm	15 - 3/4"	400 mm
Cut-out (w x d)	32 - 1/16" x 16 - 1/2"	814 mm x 419 mm	26 - 1/8" x 14 - 1/4"	664 mm x 362 mm
Gross Weight	51 lbs	23 kg	33 lbs	15 kg
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	430W	- 3.8A	430W	- 3.8A
Power Cable	Nema	5-15P	Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Fren	ich / Spanish	English / Frer	nch / Spanish

DISTINTO

UNDERCABINET HOOD



CODE ID		ABINET HOOD C36S1	30" UNDERCA F4UC	
Series	4	00	400	
Finish	Undercabinet - Stainless Steel		Undercabinet -	Stainless Steel
CONTROL PANEL				
Control Type	4 speed push	button control	4 speed pushl	button control
PERFORMANCES				
Output (CFM)	4	50	45	50
Sound Level (dB)	6	9	6	9
Motor	0	ne	One	
Venting Type	Ducted and	recirculating	Ducted and	recirculating
FEATURES				
Filter Style	Ba	ffle	Bat	ffle
Lighting	2 x 1.2	W LED	2 x 1.2	W LED
Duct diameter	5 - 15/16"	(150 mm)	5 - 15/16"	(150 mm)
DIMENSIONS/WEIGHT				
Overall dim - Width	35 - 7/8"	910 mm	29 - 13/16"	760 mm
Overall dim - Height	10 - 1/4"	260 mm	18"	460 mm
Overall dim - Depth	21 - 1/8"	535 mm	24"	610 mm
Gross Weight	46 lbs	21 kg	61 lbs	28 kg
POWER / RATINGS (115 V, 60 HZ)				
Watts / Amps	280W	- 2.50A	280W - 2.50A	
Power Cable	Nema	5-15P	Nema	5-15P
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / Frei	nch / Spanish	English / Frer	nch / Spanish



CHIMNEY HOOD



DISTINTO

BUILT-IN FRIDGE

CODE ID		Y WALL HOOD /36S1
Series and Finish	Distinto series -	Stainless Steel
CONTROL PANEL		
Control Type	Electron	c control
PERFORMANCES		
Output (CFM)	60	00
Sound Level (dB)	6	9
Motor	Single	Motor
FEATURES		
Filter Style	Pro E	Baffle
Lighting	2 x 1.2	W LED
Duct diameter	6" 15.24 cm	
DIMENSIONS/WEIGHT		
Overall dim - Width	36"	898 mm
Overall dim - Height	43 - 1/4"	1097 mm
Overall dim - Depth	19 - 3/4"	500 mm
Gross Weight	49 lbs	22 kg
POWER / RATINGS (120 V, 60 HZ)		
Watts / Ampere		- 2.8A
Power Cable	Nema	5-15P
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / Frei	nch / Spanish

DISTINTO

CHIMNEY HOOD



CODE ID		YWALL HOOD V30S1
Series and Finish	Distinto series -	- Stainless Steel
CONTROL PANEL		
Control Type	Electron	ic control
PERFORMANCES		
Output (CFM)	61	00
Sound Level (dB)	6	69
Motor	Single	Motor
FEATURES		
Filter Style	Pro F	Baffle
Lighting	2 x 1.2	2W LED
Duct diameter	6" 15.24 cm	
DIMENSIONS/WEIGHT		
Overall dim - Width	30"	762 mm
Overall dim - Height	43 - 1/4"	1097 mm
Overall dim - Depth	19 - 3/4"	500 mm
Gross Weight	45 lbs	20.4 kg
POWER / RATINGS (120 V, 60 HZ)		
Watts / Ampere	430W - 2.8A	
Power Cable	Nema	5-15P
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / Free	nch / Spanish

Series Finish PERFORMANCES/CAPACITY Annual Energy Usage Noise Level db Fridge compartment capacity (cbft) Flexzone Bottom-Drawer capacity (cbft) FEATURES Fridge Compartment Glass Shelves Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flezzone Flezzone DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE Use & Care Manual / Installation Manual	CODE ID	
PERFORMANCES/CAPACITY Annual Energy Usage Noise Level db Fridge compartment capacity (cbft) Flexzone Bottom-Drawer capacity (cbft) FEATURES Fridge Compartment Glass Shelves Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Series	
Annual Energy Usage Noise Level db Fridge compartment capacity (cbft) Flexzone Bottom-Drawer capacity (cbft) FEATURES Fridge Compartment Glass Shelves Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Finish	
Noise Level db Fridge compartment capacity (cbft) Flexzone Bottom-Drawer capacity (cbft) FEATURES Fridge Compartment Glass Shelves Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	PERFORMANCES/CAPACITY	
Fridge compartment capacity (cbft) Flexzone Bottom-Drawer capacity (cbft) FEATURES Fridge Compartment Glass Shelves Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Annual Energy Usage	
Flexzone Bottom-Drawer capacity (cbft) FEATURES Fridge Compartment Glass Shelves Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Noise Level db	
FEATURES Fridge Compartment Glass Shelves Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Fridge compartment capacity (cbft)	
Fridge Compartment Glass Shelves Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Flexzone Bottom-Drawer capacity (cbft)	
Glass Shelves Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	FEATURES	
Adjustable Door Shelves Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Fridge Compartment	
Micro shot-peened Stainless Steel Drawers Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
Flexzone Bottom-Drawer White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Adjustable Door Shelves	
White Painted Drawers Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Micro shot-peened Stainless Steel Drawers	
Internal Drawers LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Flexzone Bottom-Drawer	
LED lighting Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	White Painted Drawers	
Ice Maker Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Internal Drawers	
Equipment No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
No Frost Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	Ice Maker	
Flexzone TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
TruPivot hinges DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
DIMENSIONS/WEIGHT Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
Width in Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE	· · · · · · · · · · · · · · · · · · ·	
Height in Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
Depth without handle in Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
Minimum niche height in Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
Door clearance in Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
Door opening angle Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
Net Weight POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
POWER / RATINGS (115 V, 60 HZ) Watts / Amps Power Cable INSTRUCTIONS FOR USE		
Watts / Amps Power Cable INSTRUCTIONS FOR USE	, °	
Power Cable INSTRUCTIONS FOR USE		
INSTRUCTIONS FOR USE	· · · · · · · · · · · · · · · · · · ·	
	i olici odbio	
Use & Care Manual / Installation Manual		
	Use & Care Manual / Installation Manual	

36" BUILT-IN FRIDGE F7IBM3601-L (LEFT HINGE) F7IBM3601-R (RIGHT HINGE) 700 Distinto - Overlay Panel \$70 (580 kWh) 40 14.7 3.8 2 3 2 Low Temp 1 + 1 ice tray • • ٠ • ٠ 35 - 3/8" 900 mm 83 - 1/2" 2121 mm 24" 84" 610 mm 2134 mm 57 - 7/8" 1470 mm 105° 474 lbs 215 kg 552W - 4.8A Nema 5-15P English / French / Spanish

BUILT-IN WINE CELLAR



CODE ID	24" BUILT-IN \ F7IBW24O1-L	
	F7IBW2401-R	
Series	70	00
Finish	Distinto - O	verlay Panel
PERFORMANCES/CAPACITY		
Noise Level db	4	1
Riserva Compartment capacity (bottles)	3	6
Wine Cellar Compartment capacity (bottles)	1	8
Flexzone Bottom-Drawer capacity (cbft)		2
FEATURES		
Riserva storage compartment		
Natural wood shelves	6	3
Wine Cellar Compartment		
Natural wood shelves		3
Flexzone Bottom-Drawer		
White Painted Drawers		
Internal Drawers	-	
LED lighting		•
Glass door		•
Equipment		
TriplePlay Refrigeration		•
No Frost		•
Flexzone		•
TruPivot hinges		•
DIMENSIONS/WEIGHT		
Width in	23 - 5/8"	600 mm
Height in	83 - 1/2"	2121 mm
Depth without handle in	24"	610 mm
Minimum niche height in	84"	2134 mm
Door clearance in	46"	1168 mm
Door opening angle	10	5°
Net Weight	386 lbs	175 kg
POWER / RATINGS (115 V, 60 HZ)		-
Watts / Amps	472W	- 4.1A
Power Cable	Nema	5-15P
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / Frer	nch / Spanish

FRIDGE

FRENCH DOOR FRIDGE

CODE ID	36" FRENCH DOOR FRIDGE + DISTINTO HANDLE KIT F6FBM36S2 + F7HK36FFBS
Finish	Stainless Steel
CONTROLS	
Cooling System	Duo Frost Free Cooling
Control system	Electronic System
CAPACITIES	- -
Total Net Volume, cu. ft.	19.86
Fresh Food Net Volume, cu. ft.	13.3
Freezer Net Volume, cu. ft.	6.56
FRIDGE FEATURES	
IonFresh	•
Carbon Filter	•
Interior Filtered Water Dispenser	•
Electronic Control Display Type	Hidden Digital Display on Front Top Trim
Auto Defrost	•
Inner Illumination	Side Walls, Ceiling and Fresh Food Compartment
Shelves	4 Safety Glass
Crispers	2
Door Racks	6
Compressor	Variable Speed VCC
Large Pantry Drawer	•
Fan Ventilation	•
FREEZER FEATURES	
Automatic Ice Maker	•
Auto Defrost	•
Interior LED Lighting	Ceiling
TECHNICAL FEATURES	
Supply Voltage, V/Hz	120V / 60Hz
Rated Current, A	2.2A
Noise Level, dBA	44
DIMENSIONS	
H x W x D, in.	69 - 3/4" x 35 - 3/4" x 26 - 13/16"
H x W x D, cm	177.1 x 90.8 x 68
Product Weight, Ibs.	289 lbs
Product Weight, kg	135 Kg
PERFORMANCE	
Energy Star Qualified	•
Climatic Class	Т
Annual Energy Consumption, wh/year	566
Cooling Gas	R600
INSTRUCTIONS FOR USE	
Use & Care Manual / Installation Manual	English / French / Spanish



DISHWASHER

BUILT-IN DISHWASHER

DISHWASHER

INTEGRATED DISHWASHER

CODE ID	24" STAINLESS STEEL BUILT-IN DISHWASHER + DISTINTO HANDLE KIT F6DWT24SS2 + F7UHK24DISH
Finish	Stainless steel
PERFORMANCES	
Position	Top of door
Туре	Electronic
DISPLAY	
Rinse Aid Indicator	LED Icon
LED Spot	Floor Illuminating Led Spotlight
MAIN FEATURES	
Loading Capacity (Place settings)	16
Tub Material	Stainless Steel
Inner Door Material	Stainless Steel
Overflow Protection	•
5 Level Wash	•
Delay Timer	1 -24 Hours
3-way Euro Filter	•
Drying Fan Assisted	Fan Assisted Condensation
Brushless DC™ Motor	
Turbidity Sensor	•
Silent Operation	45 dB(A)
Interior High Loop with Air Gap	43 00(A)
Self Clean Cycle	
Half Load Function	•
Sanitize Function	•
RapidClean	•
ExtraRinse	0
PROGRAMS	
Number of Programs	6
Pots and Pans+ (167° F rinse temp.)	•
MixWash+ (142 - 145° F rinse temp.)	•
Regular Wash (142 - 145° F rinse temp.)	•
Daily Wash	•
Quick Wash (131° F)	•
Rinse & Hold	•
TECHNICAL FEATURES	
Permissible Water Pressure	4.35 - 145 psi (0.3 - 10 bars)
Electrical Connection	120 V, 12 A, 60Hz
Total Power	1400 W (watts)
Heater Power	1100 W (watts)
RACK SYSTEM	
Cutlery Basket	Sliding
Upper Rack (Inset Shelves)	2
Adjustable Upper Rack	Able to raise/lower the rack when fully loaded
3rd Rack	Full-width
ENVIRONMENTAL	
ENERGY STAR® Qualified	0
Energy Consumption, Wh/year	255
Water Consumption gal/cycle	3.5 - 5.0
RoHS compliant (Lead Free)	0.0-0.0
DIMENSION/WEIGHT	•
H x W x D, in.	33 - 7/8" x 23 - 9/16" x 22 - 1/2"
H x W x D, cm	86.1 x 59.8 x 57
Product Weights, lbs	154 lbs
Product Weights, kg	70 kg
INSTRUCTIONS FOR USE	
Use & Care Manual / Installation Manual	English / Spanish / French

CODE ID	24" INTEGRATED DISHWASHER F6DWT24FI2	
Finish	Panel Ready	
CONTROL PANEL		
Position	Top of door	
Туре	Electronic	
DISPLAY		
Rinse Aid Indicator	LED Icon	
LED Spot	Running Indicator Floor illuminating LED spotlight	
MAIN FEATURES		
Loading Capacity (Place Settings)	16	
Tub Material	Stainless Steel	
Inner Door Material	Stainless Steel	
Overflow Protection	•	
5 Level Wash	•	
Delay Timer	1 - 24 hours	
3-way Euro Filter	•	
Drying fan assisted	Fan Assisted Condensation	-
Brushless DC™ Motor	•	
Turbidity Sensor	•	
Silent Operation	45 dB(A)	
Interior High Loop with Air Gap	•	
Self Clean Cycle	•	
FUNCTIONS		
Half Load Function	•	
Sanitize Function	•	
RapidClean	•	-
ExtraRinse	•	
PROGRAMS		
Number of Programs	6	
Pots and Pans+ (167° F rinse temp.)	•	
MixWash+ (131 – 149° F rinse temp.)	•	
Regular Wash (142 – 145°F rinse temp.)	•	
Daily Wash	•	
Quick Wash (131°F)	•	
Rinse & Hold	•	
TECHNICAL FEATURES		
Permissible Water Pressure	4.35 - 145 psi (0.3 - 10 bars)	
Electrical Connection	120 V, 12 A, 60Hz	
Total Power	1400 W (watts)	
Heater Power	1100 W (watts)	
RACK SYSTEM		
Cutlery Basket	Sliding	
Upper Rack (Inset Shelves)	2	
Adjustable Upper Rack	Able to raise/lower the rack when fully loaded	
3rd Rack	Full-width	
ENVIRONMENTAL STANDARDS		
ENERGY STAR® Qualified	•	
Energy Consumption, Wh/year	255	
Water Consumption gal/cycle	3.5 - 5.0	
RoHS compliant (Lead Free)	•	
DIMENSIONS/WEIGHT		
H x W x D, in.	33 - 7/8" x 23 - 9/16" x 22 - 1/2"	
H x W x D, cm	86.1 x 59.8 x 57	
Product Weight, Ibs.	154 lbs.	
Product Weight, kg	70 kg	-
INSTRUCTIONS FOR USE		



A FAMILY A PASSION-



FULGOR MILANO

> There are few places in the world where food has been the very backbone of a culture like it has been in Italy for centuries. A passion for cooking, creating and using local ingredients, has inspired generations of Italian families and has made the kitchen the heart of the home. The aroma of long hours of food preparation, tables filled with recipes handed down generation to generation, accompanied with the perfect local wine are moments that linger in our memories and give us a sense of home even when we are far away. These things are what being Italian is all about. The Meneghetti Family has brought us the Fulgor Milano line of products so that we too may be inspired to cook and create with this same passion at home. Every Fulgor Milano product has been designed and developed to not only meet or exceed expectations of performance and quality, but also provide a design that is uniquely Italian.



DESIGNED IN ITALY



UGO MARINELLO

IDA Award winning designer Ugo Marinello is passionate about his work and his desire to synthesize modern rationality with traditional design. A graduate of IUAV in Venice, he draws inspiration from the unique architecture of that city, using it as a foundation to bring innovative yet timeless design and quintessential Italian spirit to your home and kitchen throughout the Fulgor Milano line.

ALFRED HENDRICKX

Known internationally for his mid-century furniture collections, designer Alfred Hendrickx began incorporating the strong lines of industrial styling and materials like stainless steel early in his career. After many successful design collaborations in Europe, he turned his attention to the design of household appliances, notably marrying modern form and function for Meneghetti and Fulgor Milano.





Every effort is made to ensure the information in this catalog is accurate at the time of publication. For the most up-to-date information of any of the products or accessories in this catalog, please visit www.fulgor-milano.us Meneghetti S.p.a. reserves the right to make updates to the information and products or discontinue models contained in this catalog without notice



Rosà - Vicenza - Italy www.fulgor-milano.com info@fulgor-milano.com