


Integrated hood 70

FBHD 700 PT X



- Soft touch controls
- Stainless steel finish
- Extraction output: 700 m³/h
- 4 suction levels
- Power off timer
- Sound power from 47 to 70 dBA
- LED lighting
- Filter saturation indicator
- Aluminium anti-grease filters
- Non-return valve
- Energy Class A

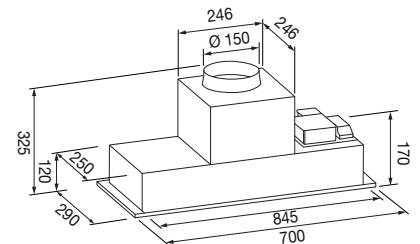

Features

Built-In hood. With stainless steel perimetral extraction (air is extracted along the centre panel's perimeter). This hood features 4 LED lights, whereas the part above is discreetly inside the wall unit, although remaining easily accessible for maintenance purposes. The anti-grease filters are dishwasher-safe.

Accessories on request:

- HP activated carbon filter - filtering version use

FCHF 13



STAINLESS STEEL
FBHD 700 PT X
EAN 8019801023141

EXTRACTION

INSERTION HOODS



FBHD 700 PT X	
Type	Integrated
Finish	Stainless steel
Installation	In wall unit
FEATURES	
Efficiency class	A
Extraction levels	4
Timer and auto power off	•
Anti-grease filter saturation indicator	•
HP filter saturation indicator (filtering)	•
Lighting	LED / 4 spot
Type of anti-grease filters	Aluminium
Dishwasher-safe anti-grease filters	•
Minimum air outlet tube \varnothing	\varnothing 150 mm / rect.
Airflow non-return valve	•
CONTROLS	
Operating system	Soft touch
PERFORMANCE / ELECTRICAL DATA	
Extraction power m ³ /h (max)	700
Noise (dBA)	47 - 70
Annual consumption (kWh)	50
Motor power (W)	275
Voltage / Frequency (V - Hz)	230 - 50
Power cord (m)	2
Plug (Schuko)	•
ACCESSORIES	
Motor included	•
HP filter for filtering version (on request)	FCHF 13
DIMENSIONS	
Width (mm)	900 and 700
Height (mm)	325
Depth (mm)	290