




## Fully Integrated 60

FDW 82103



- Concealed
- Variable fulcrum hinges
- 10 washing programs
- 13 place settings
- Half load option
- Delayed start
- 3 racks with handles + cutlery tray
- 3-level upper rack regulation
- Washing temperatures: 45 °C ÷ 70 °C
- End-of-cycle door release
- Energy class F (ex A+) - Efficiency class A

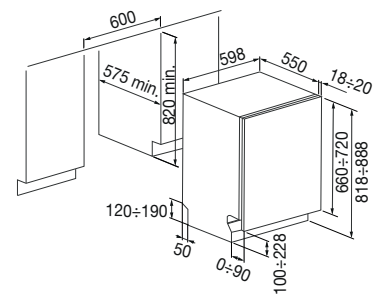

## Features

The dishwasher has a self-balanced door to maintain the chosen opening position and the 3/1 option (use of detergents with salt and rinse aid). It features variable fulcrum hinges and base adjustment up to 10 cm. The Soft Touch control panel allows users to select the washing program and warns them when salt and rinse aid are running out. Sound emission of 45 dB (A) re 1 pW and annual electricity consumption of 292 Kwh. The Enersave (ECO) option reduces energy consumption. Delayed start from 0 to 24 hours. The safety devices include AcquaStop, level sensors and seals against water leaks.



FULLY INTEGRATED  
FDW 82103  
EAN 8019801022014

# DISHWASHING

DISHWASHER



FDW 9093.1	
Type	Integrated
<b>ENERGY CONSUMPTION</b>	
Efficiency class	B
Washing efficiency class	A
Drying efficiency class	A
Water consumption (litre / cycle)	9 L
Estimated annual energy consumption (Kwh)	230
Estimated annual water consumption (litres)	2520 L
Sound level dB (A) re 1pW	44
<b>MAIN FEATURES</b>	
Max place setting no. / IEC	13
Electronic control	•
Delayed start (hours)	0 - 24
Door opening system	Standard
Interior light	•
End-of-cycle detection floor buzzer / light	• / •
Multi-tablet arrangement	•
Drying with door auto opening	•
Cold/hot water supply (max 60°C)	• / •
<b>FUNCTIONS AND PERFORMANCE</b>	
Washing temperatures (°C)	38°-45°-50°-55°-65°-70°-75°
Washing programs no.	10
Fast cycles	-
Auto 45 - 65°C	•
Half load (for all programs)	Distributed with option
Intensive pan washing (SUPER)	•
Drying system	With residual heat
<b>SAFETY SYSTEM</b>	
AcquaStop	•
No salt indicator	•
No rinse aid indicator	•
Water softener adjustable from 0 to 90 ° dF	•
<b>POWER RATING</b>	
Voltage / Frequency (V - Hz)	220 - 240 / 50
Power cord (m)	1.4
Plug	•
<b>WEIGHT, DIMENSIONS, INSTALLATION</b>	
Net weight (kg)	45
Height (mm)	858 - 908
Width (mm)	598
Depth (mm)	577
Door regulation	860 variable fulcrum with regulation
Built-In Cut Out (W x H x D) mm	600 x 860 x 575
Rear feet front regulation	•