


## ARIA+ induction 60

FHH 600 ID TC BK



- Multi-Control Touch Slider
- Black Glass Ceramic finish
- 4 cooking zones (2 vertical bridge zones)
- 9 power levels + Booster
- Temp. maintenance function
- Chef function
- Timer
- Power limit (optional)
- Built-In extraction hood
- Extraction booster
- Energy Class A++

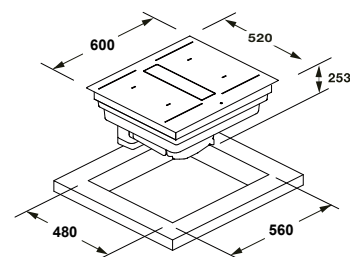

## Features

Induction hob with incorporated extraction hood equipped with a patented waterproof motor. One home appliance combining a high-performance hob with an efficient on-surface extraction. The Chef function allows you to differentiate the temperature of the cooking zones. Other functions include: adjustable delayed auto power off, grease filter maintenance warning, a light indicator for the regeneration of activated carbon ceramic filters, and automatic extraction hood power-off when the flap is closed. Moreover, this product comes with the following accessories: an anti-grease filter kit including a surface cleaning scraper. The tube kit and carbon filter kit are available on request:



BLACK GLASS CERAMIC  
FHH 600 ID TC BK  
EAN 8019801032020




DUCT KIT  
FDUCTKIT ARIA +  
EAN 801980103273



CARBON FILTER KIT  
FCHF ARIA+  
EAN 801980103274

# INDUCTION HOBS

GLASS-CERAMIC INDUCTION HOBS



| FHH 600 ID TC BK   |                             |                    |
|--|-----------------------------|--------------------|
| Dimension  | 60                          |                    |
| Technology   | Induction B4                |                    |
| Type of glass  | Black Glass Ceramic         |                    |
| Control type   | Touch                       |                    |
| Version  | with extraction hood        |                    |
| Efficiency class   | A ++                        |                    |
| INDUCTION HOB TECHNICAL DATA                                       |                             |                    |
| Power limiter  | •                           |                    |
| Power levels   | 9 + P                       |                    |
| Booster  | 5 minutes                   |                    |
| Controls   | Multifunction Touch Control |                    |
| Power level indication slider                                      | •                           |                    |
| Residual heat indicator for each zone                              | •                           |                    |
| FUNCTIONS  |                             |                    |
|  | “Pause and Resume” function | Pan detector       |
|  | Overheating prot. device    | Tem. lock Controls |
|  | Children lock               | Operation timer    |
|  | Melt function (44 °C)       | Aut. fast heating  |
|  | Single zone timer           | Chef function      |
|  | Buzzer                      | Bridge function    |
| 4 ZONES  |                             |                    |
| Zone Dimension   | 220 X 190 mm                |                    |
| Bridge function  | 2 vertical bridge zones     |                    |
| Max zone power (L9)  | 2100W                       |                    |
| Booster zone power   | 3000W                       |                    |
| HOOD TECHNICAL DATA  |                             |                    |
| Adjustable delayed auto power off                                  | •                           |                    |
| Anti-grease filter maintenance indicator                           | •                           |                    |
| Ceramic filter regeneration LED indicator                          | •                           |                    |
| Internal water discharge valve                                     | •                           |                    |
| Dishwasher-safe filter   | •                           |                    |
| Regenerable ceramic odour filter removable from the top (optional) | •                           |                    |
| Automatic hood shut-off when the flap is closed                    | •                           |                    |
| Motor under the glass  | •                           |                    |
| Patented waterproof motor  | •                           |                    |
| Air exhaust plastic connection                                     | •                           |                    |
| Maximum flow rate (m³ / h)   | 700                         |                    |
| Pressure (Pa)  | 540                         |                    |
| Motor power (W)  | 220                         |                    |
| Voltage (V)  | 220 - 240                   |                    |
| Frequency (Hz)   | 50 - 60                     |                    |
| Sound power max sp. dB(A)  | 62                          |                    |
| Controls   | Multifunction Touch Control |                    |
| DIMENSIONS   |                             |                    |
| Width x Height x Depth (mm)  | 600 x 249 x 520             |                    |
| Cutout Width x Depth (mm)  | 560 x 480                   |                    |
| PERFORMANCE  |                             |                    |
| Max power absorbed (kW)  | 7.36                        |                    |
| Voltage (V)  | 220/240                     |                    |
| Frequency (Hz)   | 50/60                       |                    |
| INSTRUCTION MANUAL   |                             |                    |
| Use and installation manual  | IT - EN - FR - DE - ES - RU |                    |