

24" OVERLAY BUILT-IN DISHWASHER

24" OVERLAY DISHWASHER



CODE ID

F1DWS24FI1



Sound Level 52 dB(A)



Steel Tub



Fast Wash Cycle



1/2 Load Cycle



Delayed Start



China and Crystal Cycle

SPECIFICATIONS


- 14 Place settings
- 6 Programs
- 49 dB(A)
- Super active drying
- Fully built-in top control
- 2 Foldable racks upper basket
- Flow through heater
- 3 way Euro filtering system
- Adjustable hinge system
- Front adjustable rear feet
- Airbreak with drain backsiphonage preventer
- Overflow & leakage protection



This product meets ADA (Americans with Disabilities Act) requirements. Please check with your local municipality's codes and stipulations for additional details to ensure compliance.

DISHWASHER

24" BUILT-IN DISHWASHER

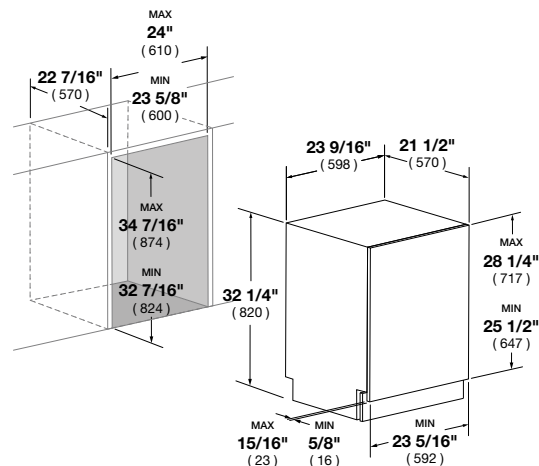

CODE ID	24" BUILT-IN DISHWASHER F1DWS24FI1
Finish	Panel Ready
CONTROL PANEL	
Position	Top of door
Type	Electronic
DISPLAY	
Rinse Aid Indicator	Electronic with White Color
LED Spot	•
MAIN FEATURES	
Loading Capacity (Place Settings)	14
Tub Material	Stainless Steel
Inner Door Material	Stainless Steel
Overflow Protection	•
Delay Timer	1 - 19 hours
3-way Euro Filter	•
Flow Through Heater	•
Silent Operation	52 dB(A)
FUNCTIONS	
Hi-Temp Options	•
Half Load (3 Modes)	•
Sanitize Option	•
Extra Drying Option	•
End of Cycle Indicator	•
Buzzer	•
Extra Fast	•
PROGRAMS	
Number of Programs	6
Regular	•
Auto	•
Intensive	•
Delicate	•
Super	•
Rinse	•
TECHNICAL FEATURES	
Permissible Water Pressure	4.35 - 145 psi (0.3 - 10 bars)
Electrical Connection	120V, 12A, 60Hz
Total Power	1400 W (watts)
Heater Power	1100 W (watts)
Shipped Power Connector	NEMA 5-15P connector
RACK SYSTEM	
Cutlery Basket	•
Upper Rack (Inset Shelves)	•
Adjustable Upper Rack	Adjustable when loaded
ENVIRONMENTAL STANDARDS	
ENERGY STAR® Qualified	•
Energy Consumption, Wh/year	260
Water Consumption gal/cycle	3.4
RoHS compliant (Lead Free)	•
DIMENSIONS/WEIGHT	
Product Height, in. (mm)	32-1/4 (820)
Product Width, in. (mm)	23-9/16 (598)
Product Depth, in. (mm)	21-1/2 (570)
Cutout Height, in. (mm) (min - max)	32-7/16 - 34-7/16 (824 - 874)
Cutout Width, in. (mm) (min - max)	23-5/8 - 24 (600 - 610)
Cutout Depth, in. (mm)	22-7/16 (570)
Panel Height, in. (mm) (min - max)	25-1/2 - 28-1/4 (647 - 717)
Panel Width, in. (mm) (min)	23-5/16 (592)
Panel Depth, in. (mm) (min - max)	5/8 - 15/16 (16 - 23)
Product Weight, lbs. (kg)	86 (39)
INSTRUCTIONS FOR USE	
Use & Care Manual / Installation Manual	English / Spanish / French