


ENOVA INDUCTION 48"



CODE ID

700 SERIES ENOVA 48 INCH INDUCTION COOKTOP

F7EIK48AS1

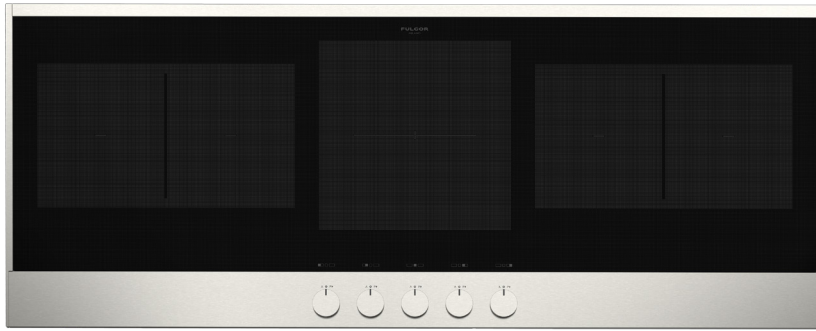

Easy Clean Ceramic Glass



Bridge Zone



Power Boost Burner



Pan Detection system



Digital Controls



Residual Heat Sensor




Warming Function

SUMMARY DESCRIPTION

The Enova 700 series 48" Satin Aluminum Cooktop has a unique design incorporating elegant tactile knobs on a 5/8" thick metal frame. Although this cook top does not feature the customizable trims, it still offers the unique design in a standard finish. The cook top features our Quantum induction for unsurpassed power and efficiency. Each cooktop has 5 cooking zones controlled via an elegant electronic knob, with one 11" max power zone plus 2 bridge zones, each zone featuring, warm, warm plus, 1-9 levels, with boost and auto functions. The Enova cook top has all the functionality and performance you would expect from an ultra premium appliance in an exclusive and unique design.

SPECIFICATIONS

Elegant Ceramic glass surface
5 Cooking Zones
Booster function for each cooking zone
Residual heat and Power-on Indicators
Melting and Simmering function
Knob Controlled
Pot Detection System
Child Lock Function
Failure Codes Indication
Digital Display for Power Level
Automatic Preheat Function

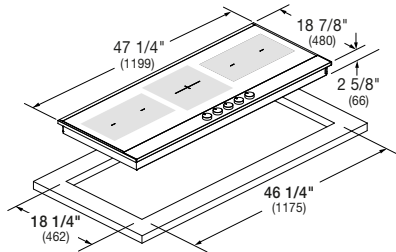

CODE ID		F7EIK48AS1			
Size	48"				
Aesthetics	Stainless Steel				
COOKTOP					
Type	Induction				
Cooking Surface	Ceramic Glass				
Knobs layout	Flat				
INDUCTION CONTROL FEATURES					
Induction Features	Pot Detection System		Child lock function		
	Cooling fan system		Cooking Power Levels indication		
Knob for power setting	•				
Cooking Power Levels	1 to 9				
Wide digital display for power level indication	•				
Melting Function 113°F/45°C	•				
Warming Function 158°F / 70°C	•				
Simmer Function 205°F / 95°C	•				
Booster/Fast boil function for each zone	•				
Automatic Preheat Function	•				
Bridge Function	•				
Residual heat indication	•				
COOKING ZONES FEATURES	Dimension		Power		
5 Cooking Zone (2 Bridge Zone)					
1 Left/Left	Octa Inductor	8-5/8"x 7-1/8"	220 x 180 mm	Level 9 - 2100W	Booster - 3700W
2 Left/Centre	Octa Inductor	8-5/8"x 7-1/8"	220 x 180 mm	Level 9 - 2100W	Booster - 3700W
3 Middle dual circuit	Round Inductor	11"	Ø 280 mm	Level 9 - 2600W	Booster - 5500W
4 Right/Centre	Octa Inductor	8-5/8"x 7-1/8"	220 x 180 mm	Level 9 - 2100W	Booster - 3700W
5 Right/Right	Octa Inductor	8-5/8"x 7-1/8"	220 x 180 mm	Level 9 - 2100W	Booster - 3700W
DIMENSIONS / WEIGHT					
Overall - width			47 1/4"	1199 mm	
Overall - height (Without Conduit)			2 5/8"	66 mm	
Overall - depth			18 7/8"	480 mm	
Cutout - width			46 1/4"	1175 mm	
Cutout - depth			18 1/4"	462 mm	
Gross Weight			64 lbs	29 kg	
POWER / RATINGS (208/240 V, 60 Hz)					
KW/Amps rating at 240V, 60Hz	10,8 kW - 45Amps				
KW/Amps rating at 208V, 60Hz	9,4 kW - 45Amps				
Conduit	•				
INSTRUCTIONS FOR USE					
Use & Care Manual - Installation Manual	EN, SP, FR				